


Cannot open file
D:\eSpark-Consultants\eSpark-Hardware\Altium Template\espark-consulting-group-800x300.jpg.
File does not exist.


Title: Top-Sheet.SchDoc

File: Smart-Switch-v1.1.PrjPcb


Date: 27/09/2023	Page Num: 1
Drawn By: Huzaifa Ali	Page Total: 3

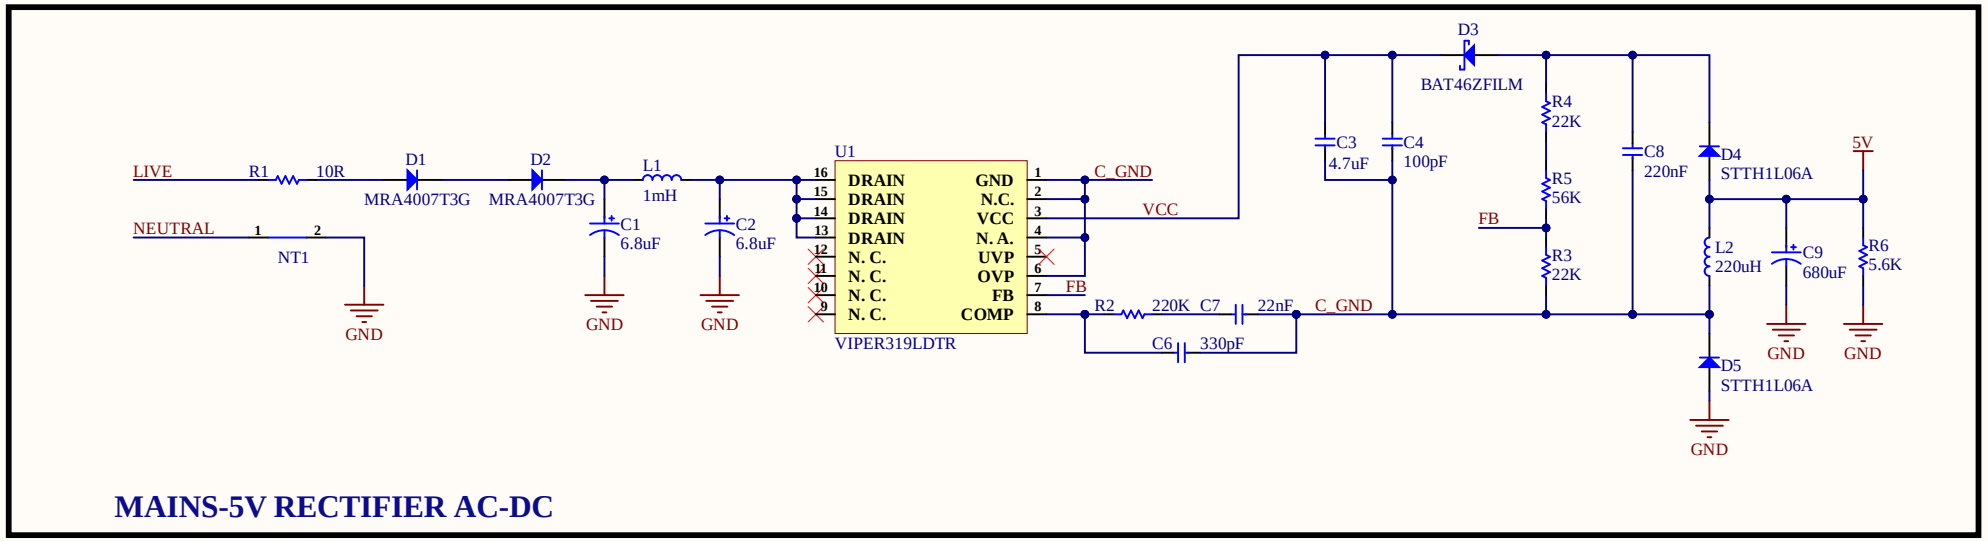

MAINS-5V RECTIFIER AC-DC





MAIN CONNECTOR

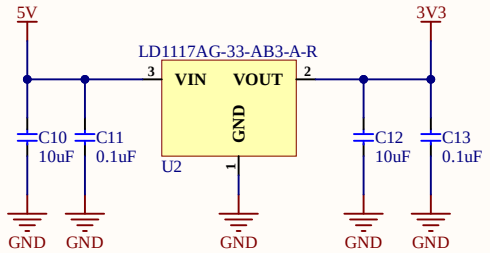

3.3V LDO FOR ESP

TEST POINTS









Cannot open file D:\eSpark-Consultants\eSpark-Hardware\Altium Template\espark-consulting-group-800x300.jpg. File does not exist.

Title: Power-Sheet.SchDoc	
File: Smart-Switch-v1.1.PrjPcb	
Date: 06/10/2023	Page Num: 2
Drawn By: Huzaifa Ali	Page Total: 3


ESP32-S3FH4R2

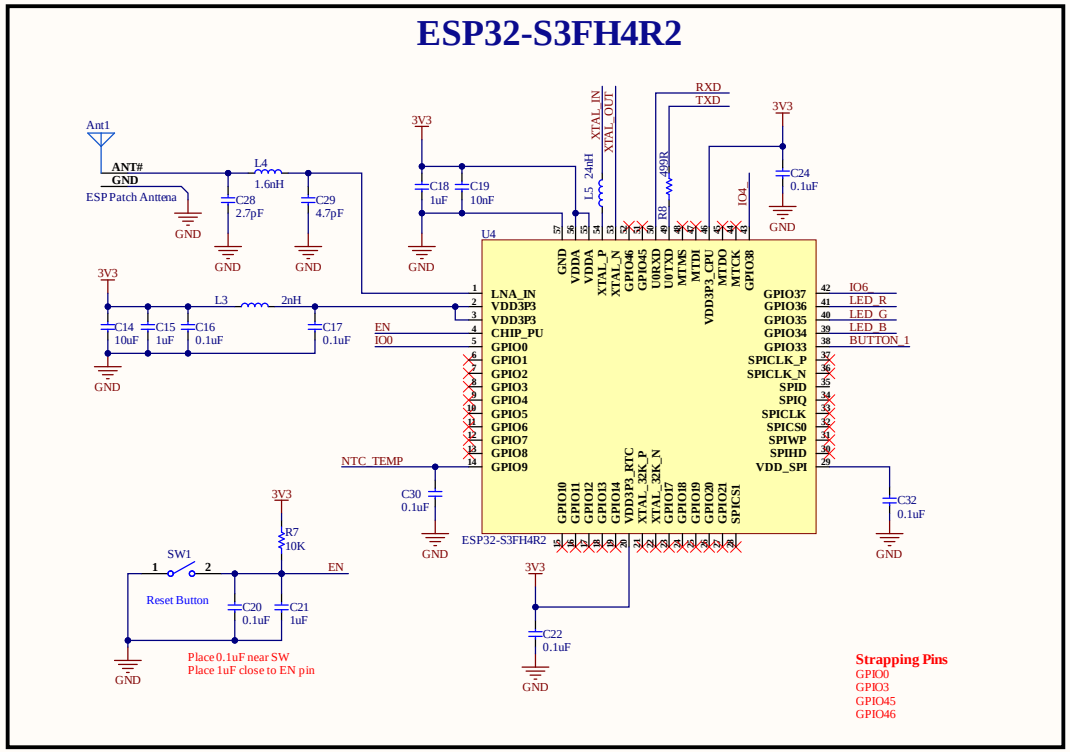


RELAY




AC INPUT




TEMPERATURE NTC




RGB LEDs




40MHz CRYSTAL




PROGRAMMING



PUSH BUTTON





Cannot open file
D:\eSpark-Consultants\eSpark-Hardware\Altium Template\espark-consulting-group-800x300.jpg.
File does not exist.

Title: Controller-Sheet.SchDoc	
File: Smart-Switch-v1.1.PrjPcb	
Date: 19/10/2023	Page Num: 3
Drawn By: Huzaifa Ali	Page Total: 3

Layer	Name	Material	Thickness	Constant	Board Layer Stack
	Top Overlay				
	Top Solder	Solder Resist	0.010mm	3.5	
1	Top Layer		0.035mm		
	Dielectric 2	PP-006	0.130mm	4.1	
2	Power Layer	CF-004	0.035mm		
	Dielectric 1	FR-4	0.600mm	4.8	
3	Ground Layer	CF-004	0.035mm		
	Dielectric 3	PP-006	0.130mm	4.1	
4	Bottom Layer		0.035mm		
	Bottom Solder	Solder Resist	0.010mm	3.5	
	Bottom Overlay				

Total board thickness: 1.019mm

