


BOOST CONVERTER




LIPO LOADING




MOTOR DRIVER1

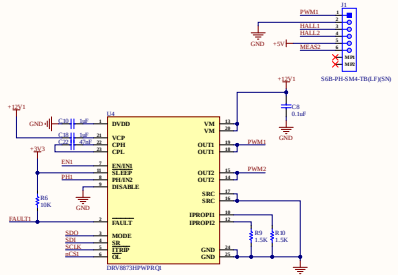


CURRENT MEASUREMENT



POWER SUPPLY

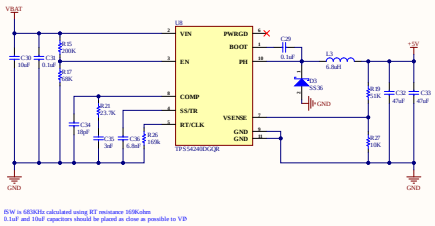


STM32F103

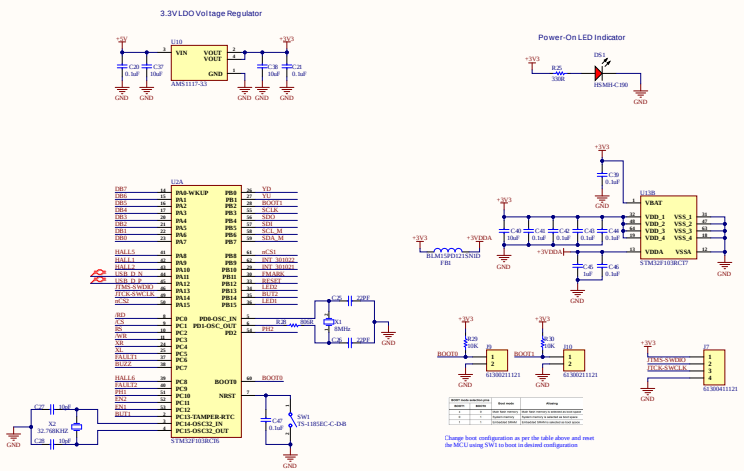


BOOT mode selection pins		Boot mode	Aliasing
BOOT1	BOOT0		
x	0	Main flash memory	Main flash memory is selected as boot space
0	1	System memory	System memory is selected as boot space
1	1	Embedded SRAM	Embedded SRAM is selected as boot space


USB COMMUNICATION AND CHARGE INPUT




MOTOR DRIVER2



BUZZER & PUSH BUTTON




MAX30102 CONNECTOR



I2C and interrupt lines are already pulled up to 3.3V on the breakout board of MAX30102


LCD

MCU method



Is it okay to operate LCD on 3.3V? The typ voltage recommended in datasheet is 2.8V and 3..3V falls in the absolute maximum ratings

FPC CONNECTOR AND NOTES



Buttons are pulled up on the daughter board and appropriate series resistance is also installed for the LED. LED cathode is exposed on the FPC

Table 7-4. PH/EN Mode Truth Table

nSLEEP	DISABLE	ENIN1	PH/IN2	OUT1	OUT2
0	X	X	X	Hi-Z	Hi-Z
1	1	X	X	Hi-Z	Hi-Z
1	0	0	X	H	H
1	0	1	0	L	H
1	0	1	1	H	L

Due to pin limitation on MCU, only three kinds of controls are possible with the DRV8873 as highlighted in the table above

Title			
Size: A1	Number:	Revision:	
Date: 4/11/2023	Sheet of		
File: D:\Github\...\Sheet4.SchDoc	Drawn By:		