


The very first thing I need is a quote on what it would cost me if you were to finish routing this. The connectors should stay exactly where they are. You can move the IC if you want. Upwards so on the top side we have 6mm height and downwards on the bottom side we have 2mm height.

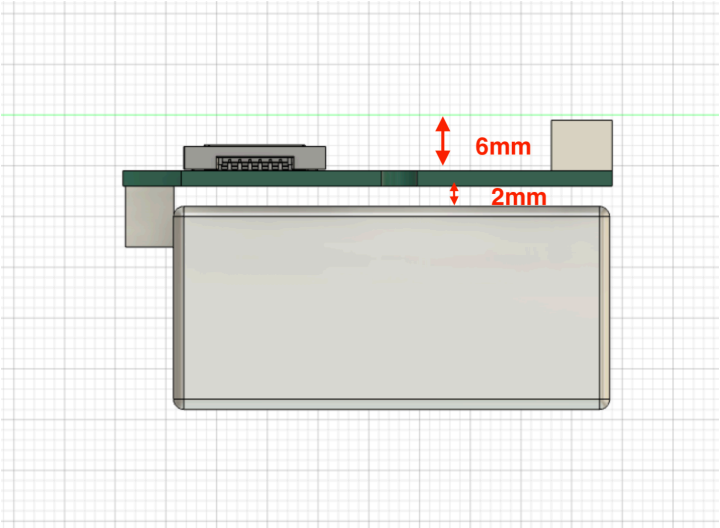

The areas on the back side are the areas where the board rests and are "no routing area".

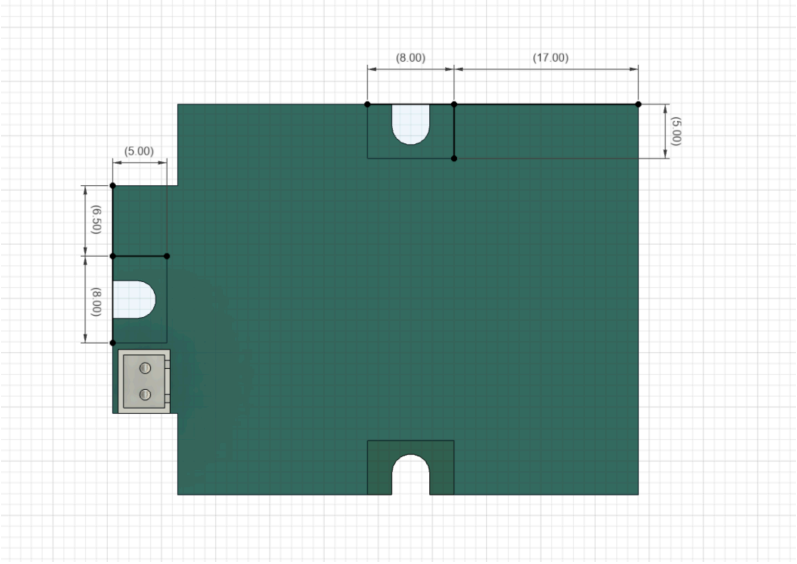

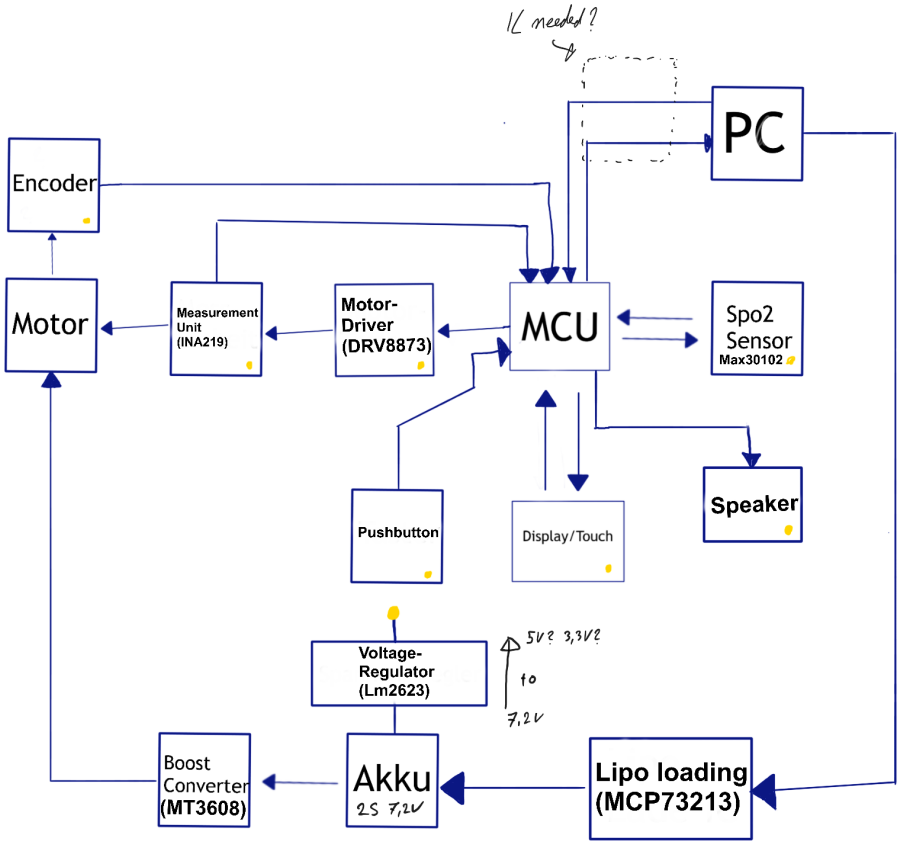

The diagram has the highest priority. The schematic has only been an attempt and must even be adapted in some places. (Like e.g. missing buttons).

Functional description:

The motors run in normal operation, as you can see from the data sheets, with 12V*0,4A = 4,8 W. There are 2 motors on the board.
That means the board draws constantly about 10W.
At full load, the circuit must be ready to deliver 50W for a maximum of 60 seconds.

Diagram description:

This diagram was used to create the schematic. If you think you have found a mistake or a change, you can tell us about it. I will pass it on and you will get something for it at the end when the boards are finished.

Functional description of the board:

We are a StartUp company in motorcycle equipment for the race track.
The electronics are to control the engines. To regulate the air supply.
The current of the motors is measured to see what pressure is currently on the air opening. That means we have to be able to measure the pressure via a current measurement later. The whole thing is controlled by 2 buttons and a 2.4" touch display.

You can exchange your own plugs for smaller ones. Like for example the one with which we connect the magnetic connector later. All connectors you would have to look for at JLCPCB because we have everything made there in the end.

J7 for example can be omitted completely. We want to be able to program the device via the magnetic connector. Later we want to read out the measurement data. That's why the jumper J7 so that we can switch between programming and reading back and forth that we do not need but currently programming alone is enough.

The plug for the loudspeaker (3) can be smaller. The plug for the magnet connector (2) can also be much much smaller. And the plug for the battery (1) is in the current layout on the top side. But it should be on the bottom side. And hardly also smaller

