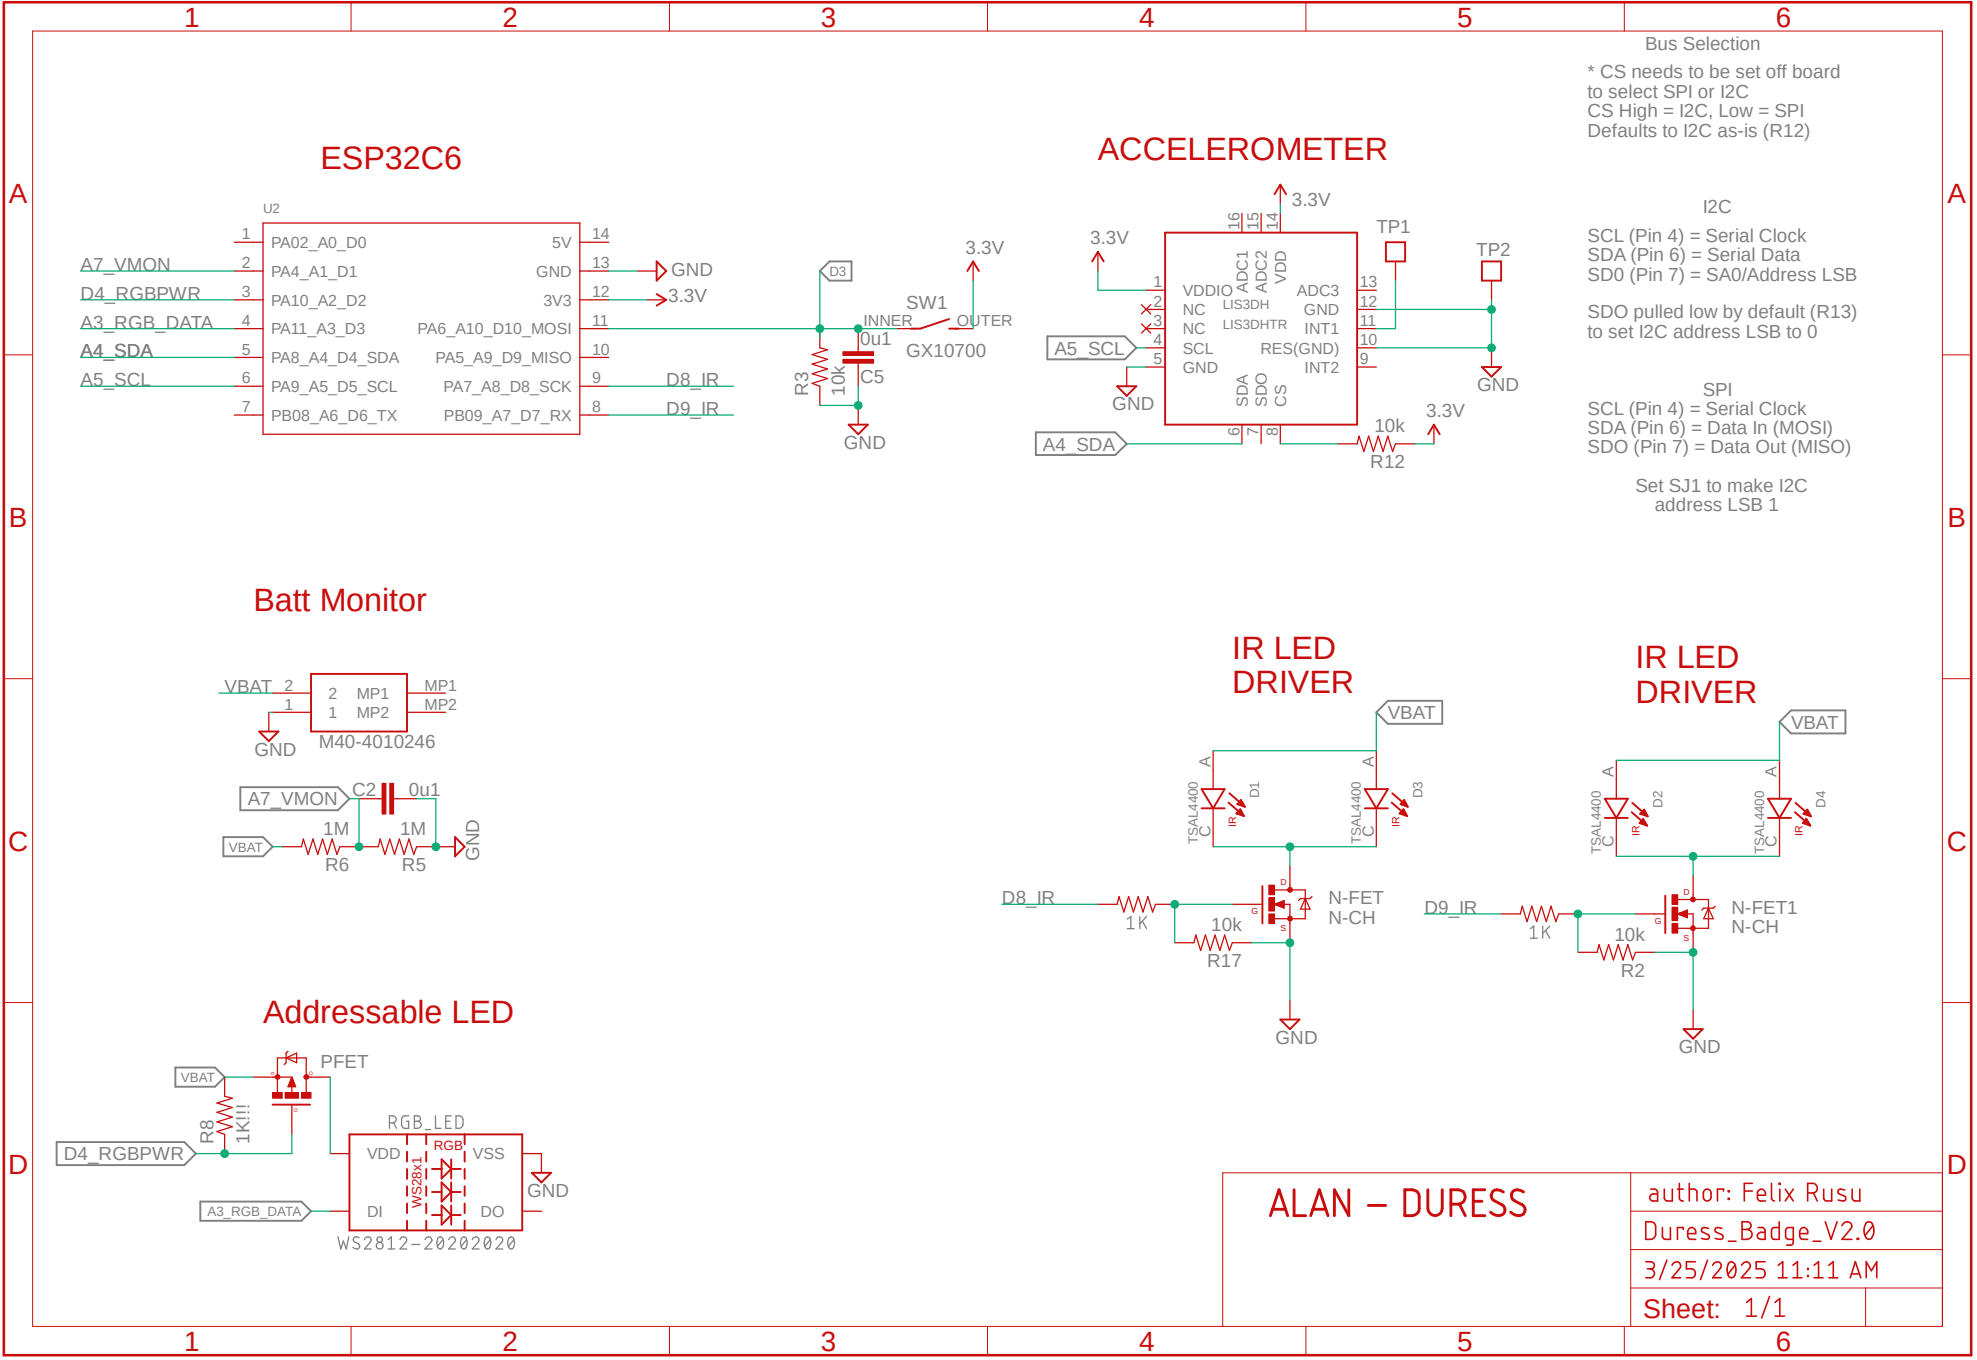
ESP32C6
U2
A7_VMON
D4_RGBPWR
A3_RGB_DATA
A4_SDA
A5_SCL
PA02_A0_D0
PA4_A1_D1
PA10_A2_D2
PA11_A3_D3
PA8_A4_D4_SDA
PA9_A5_D5_SCL
PB08_A6_D6_TX
5V
GND
3V3
PA6_A10_D10_MOSI
PA5_A9_D9_MISO
PA7_A8_D8_SCK
PB09_A7_D7_RX
D8_IR
D9_IR
D3
SW1
INNER
OUTER
GX10700
0u1
C5
R3
10k
ACCELEROMETER
3.3V
TP1
TP2
VDDIO
NC
NC
SCL
GND
ADC1
ADC2
VDD
LIS3DH
LIS3DHTR
RES(GND)
SDA
SDO
CS
ADC3
INT1
INT2
10k
R12
Bus Selection
* CS needs to be set off board
to select SPI or I2C
CS High = I2C, Low = SPI
Defaults to I2C as-is (R12)
I2C
SCL (Pin 4) = Serial Clock
SDA (Pin 6) = Serial Data
SD0 (Pin 7) = SA0/Address LSB
SDO pulled low by default (R13)
to set I2C address LSB to 0
SPI
SCL (Pin 4) = Serial Clock
SDA (Pin 6) = Data In (MOSI)
SDO (Pin 7) = Data Out (MISO)
Set SJ1 to make I2C
address LSB 1
Batt Monitor
VBAT
MP1
MP2
M40-4010246
C2
0u1
1M
R6
R5
IR LED
DRIVER
TSAL4400
D1
D3
D8_IR
1K
10k
R17
N-FET
N-CH
IR LED
DRIVER
D2
D4
D9_IR
R2
N-FET1
N-CH
Addressable LED
PFET
R8
1K!!!
D4_RGBPWR
RGB_LED
VDD
RGB
VSS
DI
DO
WS28x1
A3_RGB_DATA
WS2812-20202020
ALAN – DURESS
author: Felix Rusu
Duress_Badge_V2.0
3/25/2025 11:11 AM
Sheet: 1/1