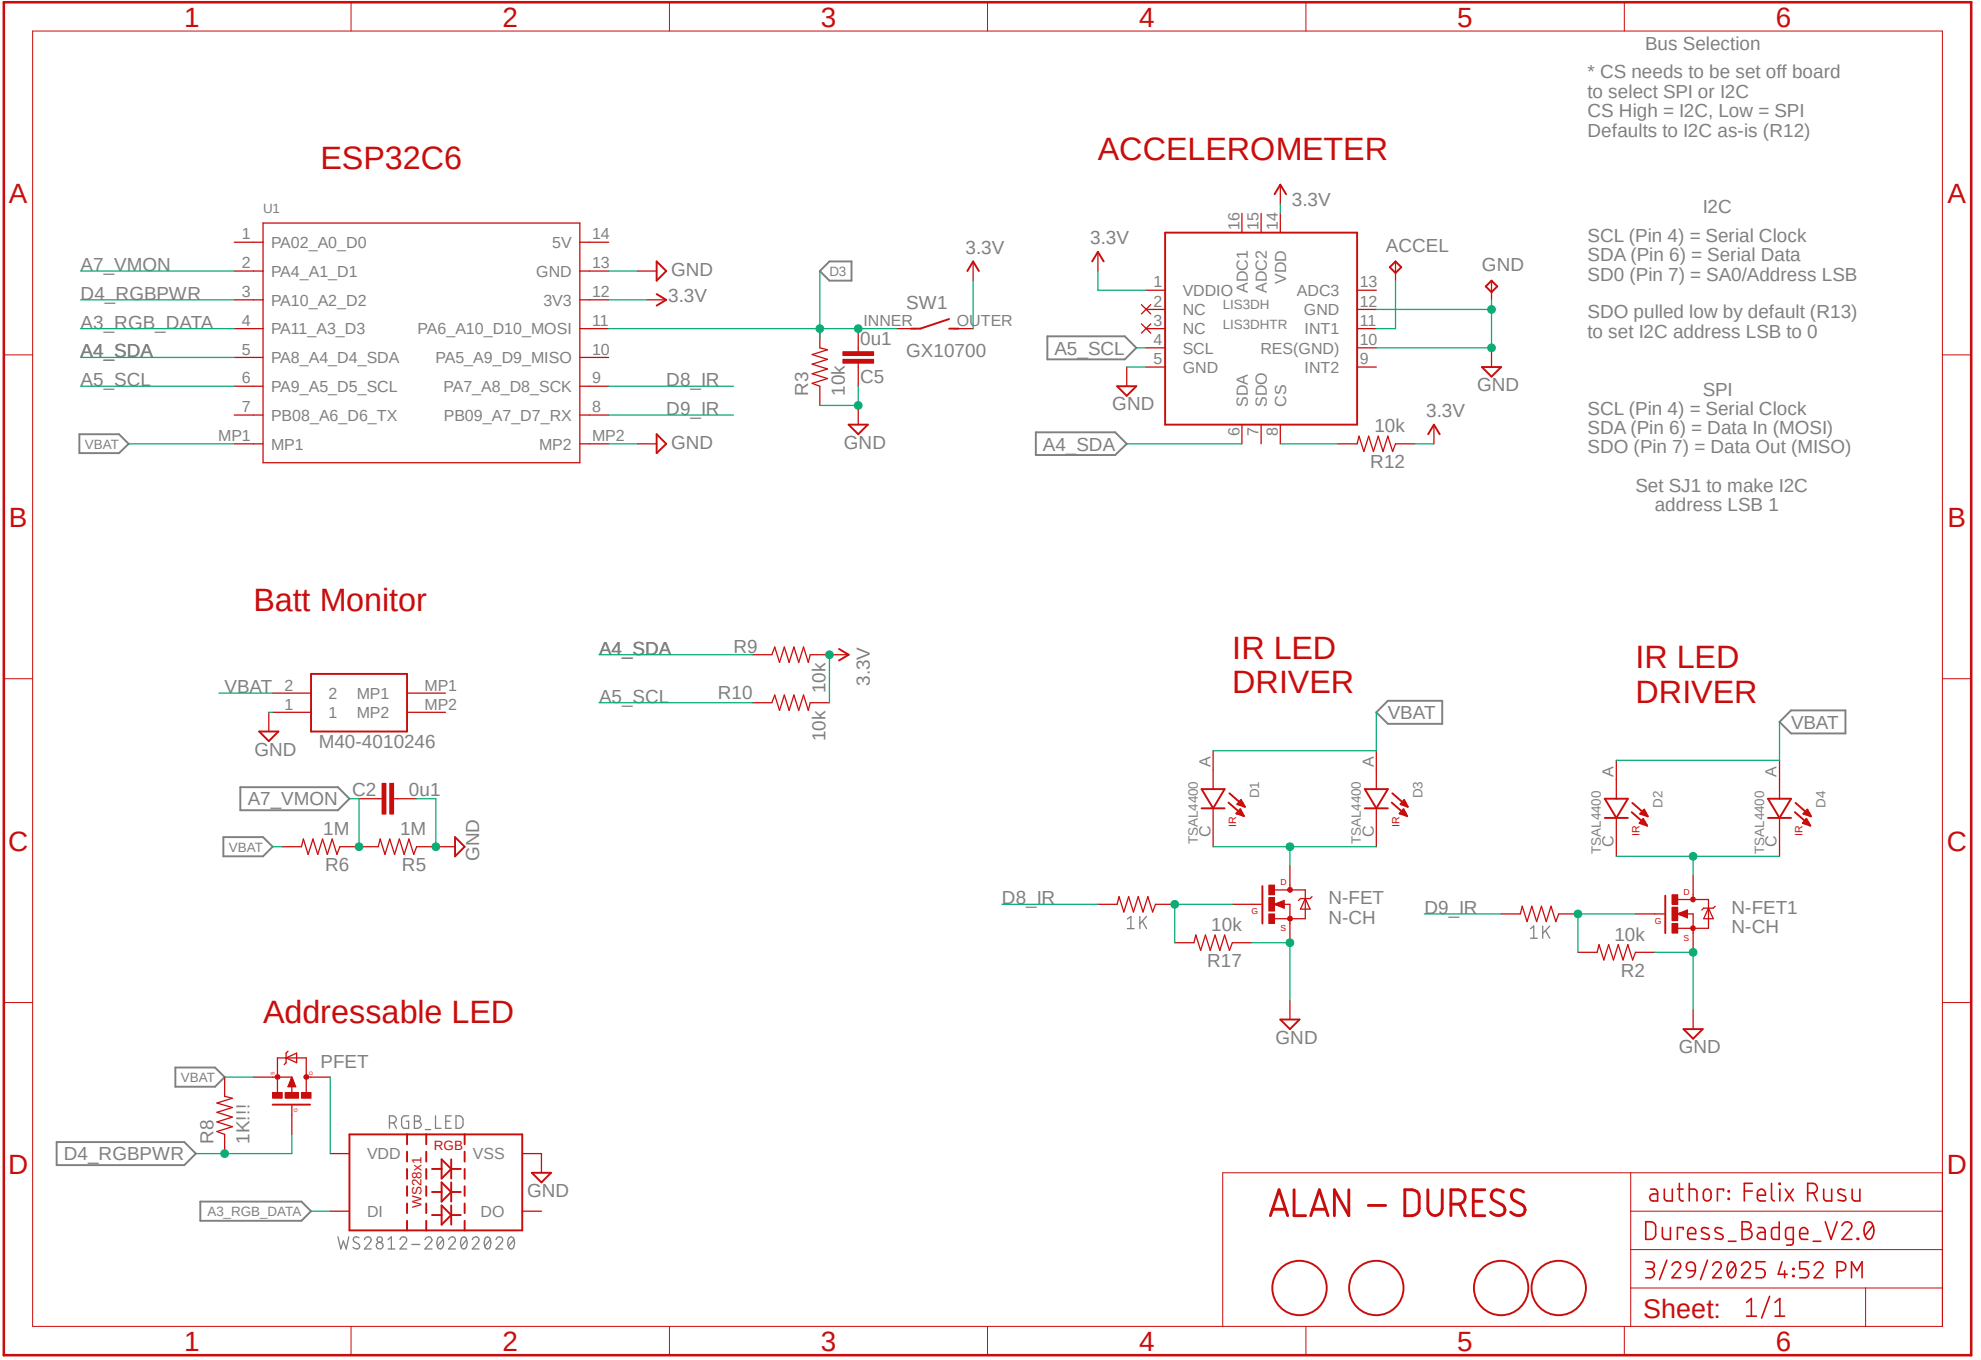

ESP32C6
U1
A7_VMON
D4_RGBPWR
A3_RGB_DATA
A4_SDA
A5_SCL
VBAT
PA02_A0_D0
PA4_A1_D1
PA10_A2_D2
PA11_A3_D3
PA8_A4_D4_SDA
PA9_A5_D5_SCL
PB08_A6_D6_TX
MP1
5V
GND
3V3
PA6_A10_D10_MOSI
PA5_A9_D9_MISO
PA7_A8_D8_SCK
PB09_A7_D7_RX
MP2
D8_IR
D9_IR
SW1
INNER
OUTER
GX10700
0u1
C5
R3
10k
ACCELEROMETER
ACCEL
LIS3DH
LIS3DHTR
VDDIO
NC
SCL
SDA
ADC1
ADC2
ADC3
INT1
INT2
RES(GND)
CS
R12
Bus Selection
* CS needs to be set off board
to select SPI or I2C
CS High = I2C, Low = SPI
Defaults to I2C as-is (R12)
I2C
SCL (Pin 4) = Serial Clock
SDA (Pin 6) = Serial Data
SD0 (Pin 7) = SA0/Address LSB
SDO pulled low by default (R13)
to set I2C address LSB to 0
SPI
SCL (Pin 4) = Serial Clock
SDA (Pin 6) = Data In (MOSI)
SDO (Pin 7) = Data Out (MISO)
Set SJ1 to make I2C
address LSB 1
Batt Monitor
M40-4010246
R6
R5
1M
C2
R9
R10
IR LED
DRIVER
TSAL4400
D1
D3
N-FET
N-CH
R17
1K
IR LED
DRIVER
D2
D4
N-FET1
R2
Addressable LED
PFET
R8
1K!!!
RGB_LED
WS28x1
WS2812-20202020
ALAN – DURESS
author: Felix Rusu
Duress_Badge_V2.0
3/29/2025 4:52 PM
Sheet: 1/1