


USB INPUT

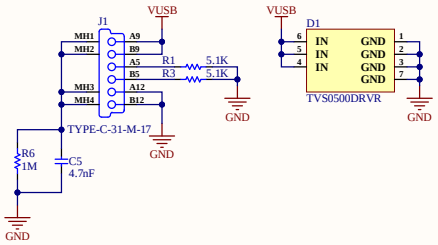


DC OR SOLAR INPUT

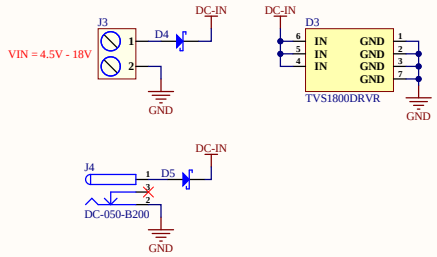


POWER ORING




Li-ION BATTERY CHARGER

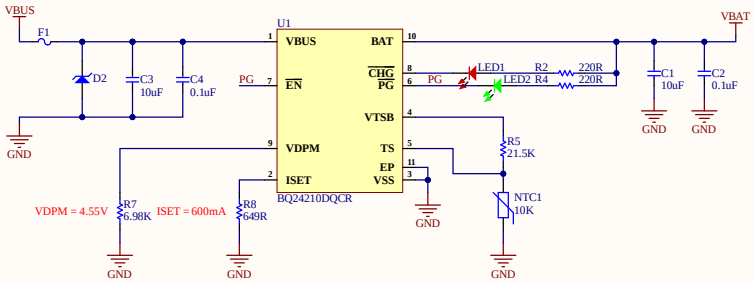


BATTERY



BUCK - BOOST CONVERTER

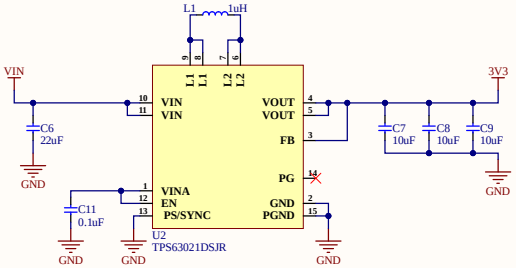


SWITCH




Title: Power-Sheet.SchDoc	
File: End-Device-v1.0.PrjPcb	
Date: 7/8/2025	Page Num: 1
Drawn By: Huzaifa Ali	Page Total: 3

STM32 LORA HIGH BAND

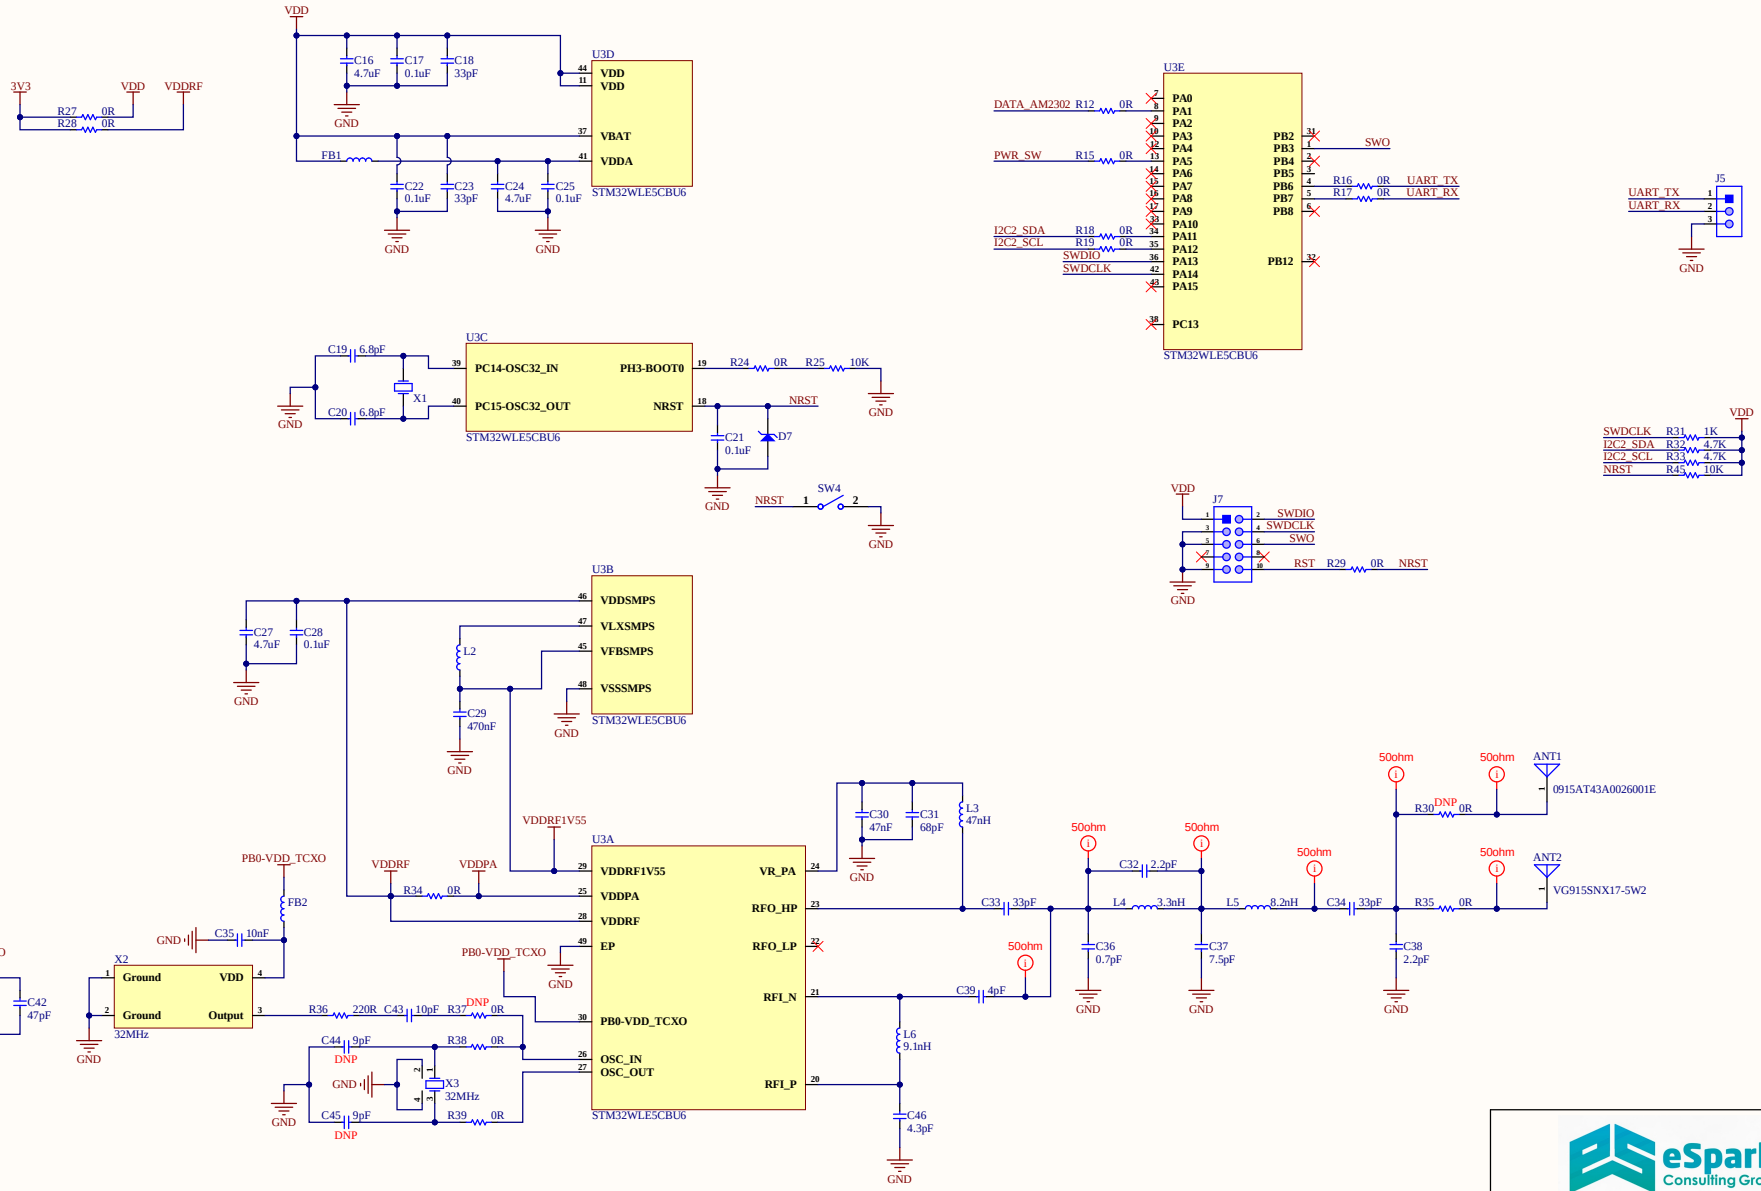


Title: MCU-Sheet.SchDoc	
File: End-Device-v1.0.PrjPcb	
Date: 7/14/2025	Page Num: 2
Drawn By: Huzaifa Ali	Page Total: 3


LIGHT SENSOR




AIR QUALITY SENSOR




TEMPERATURE AND HUMIDITY SENSOR



HIGH SIDE SWITCH



Title: Sensor-Sheet.SchDoc	
File: End-Device-v1.0.PrjPcb	
Date: 7/14/2025	Page Num: 3
Drawn By: Huzaifa Ali	Page Total: 3

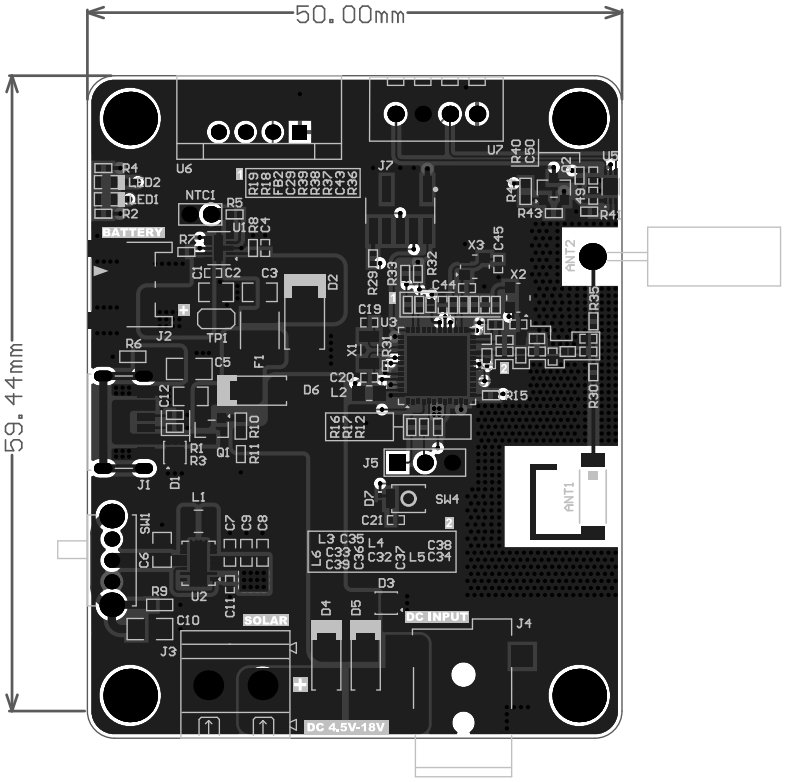

Layer	Name	Material	Thickness	Constant	Board Layer Stack
	Top Overlay				
	Top Solder	Solder Resist	0.012mm	3.5	
1	Top Layer		0.035mm		
	Dielectric 2	PP-006	0.203mm	4.4	
2	Ground	CF-004	0.030mm		
	Dielectric 1	FR-4	1.030mm	4.6	
3	Power	CF-004	0.030mm		
	Dielectric 3	PP-006	0.203mm	4.4	
4	Bottom Layer		0.035mm		
	Bottom Solder	Solder Resist	0.012mm	3.5	
	Bottom Overlay				

Total board thickness: 1.589mm