


REVISIONS			
No.	DESCRIPTION	ECN No.	DATE.

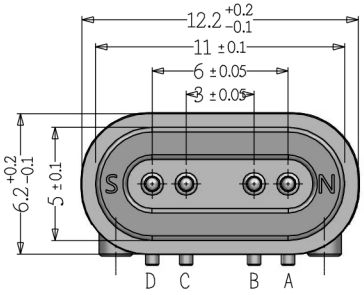


VIEW A
SCALE 3/1




VIEW D
SCALE 2/1

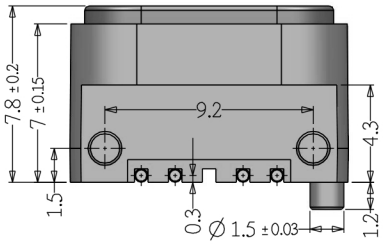


VIEW B
SCALE 3/1



VIEW E
SCALE 2/1

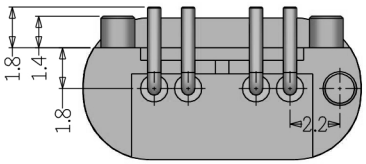

VIEW C
SCALE 3/1

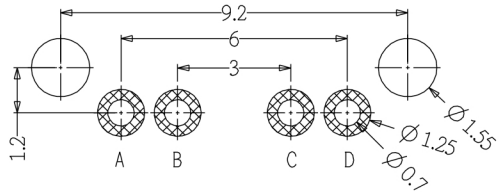

Recommend PCB Layout(TOP VIEW)
Layout Tolerance:±0.05

P1	COLOR	P2 USB
A	Vbus/Red	1
B	DATA-/White	2
C	DATA+/Green	3
D	GND/Black	4

Technical Specifications

1 Electrical
- Rated current & Voltage:5-48V/3A
- Contact resistance:50 mΩ

2 Mechanical
- Spring force at working stroke 1mm60gf±15gf
- Full stroke:1.2mm
- Durability:50,000 Cycles(minimum)

3 Environmental performance
- Storage and Operating Temperature range:-40℃～+85℃
- Humidity range 10%～90%RH
- Withstand ing Hige Temperature:260/10Sec
- Salt spray test 48h
- Products comply with RoHs,Reach,HF,Standards

4 When the current is greater than 1A then need to increase the time delaycircuit(1second)

No.	Name or Part Number	Material	Specifications	QTY	Remarks
3	Magnet HY1105030M0F	NdFeB	Black Ni10um	1pcs	
2	Housing HY415H1226270W	PA9T	(UL94V-0),Black	1pcs	
1	Pogo pin HY0612A6541T	Brass	Ni2.5um/Au0.125um	4pcs	

DRAWN	Denis	SCALE		UNIT	mm	DRAWING NO.	HY41226278AM061265W
CHECKED		SHEET		PROJECT		TITLE:	4pin磁吸公端
APPROVED		DATE		VER.	D0		
MATERIAL		QTY					

THE UNMARKED TOLERANCE ARE AS BELOW:

LENGTH		ANGLE	
0-10	0.05mm	0.	2.0
10-50	0.10mm	0.0	1.0
50-120	0.15mm	0.00	0.50

Shenzhen Weixunda Electronic Technology Ltd.

THE INFORMATION IN THIS DOCUMENT IS PROPERTY OF HOYEE COMPANY AND SHOULD,NOT BE COPIED OR REPRODUCED IN ANY OTHER WAY,WITHOUT WRIT/HOYEE COMPANY WEBSITE:HTTP:WWW.CN-HOYEE.COM