

REVISIONS			
No.	DESCRIPTION	ECN No.	DATE.

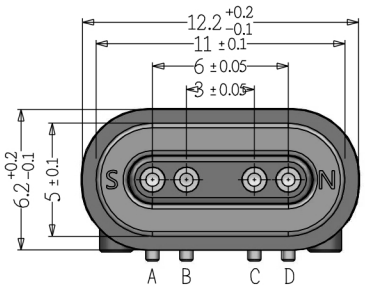


VIEW A
SCALE 3/1




VIEW D
SCALE 2/1

P1	COLOR	P2 USB
A	Vbus/Red	1
B	DATA-/White	2
C	DATA+/Green	3
D	GND/Black	4

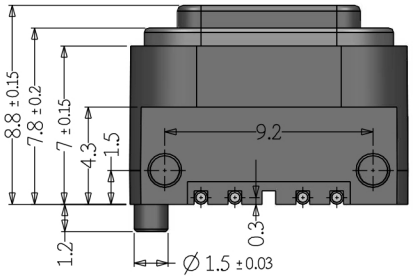

VIEW B
SCALE 3/1



VIEW E
SCALE 2/1

Technical Specifications

1 Electrical

Rated current & Voltage:5-48V/3A

Contact resistance:50 mΩ

2 Mechanical

Durability:50,000 Cycles(minimum)

3 Environmental performance

Storage and Operating Temperature range:-40℃～+85℃


Humidity range 10%～90%RH

Withstand ing Hige Temperature:260/10Sec


Salt spray test 48h

Products comply with RoHs,Reach,HF,Standards

4 When the current is greater than 1A then need to increase the time delaycircuit(1second)

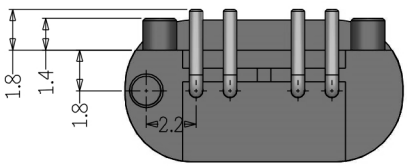

VIEW C
SCALE 3/1

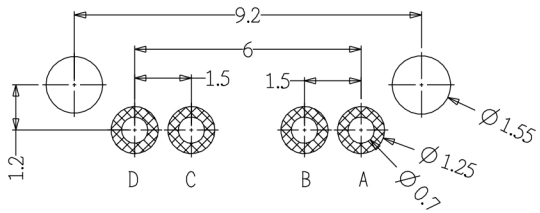

Recommend PCB Layout(TOP VIEW)
Layout Tolerance:±0.05

№	Name or Part Number	Material	Specifications	QTY	Remarks
3	Magnet HY1105030M0F	NdFeB	Black Ni10um	1pcs	
2	Housing HY415H1226288W	PA9T	UL94V-0	1pcs	
1	Pin HY110806D1060118	Brass	Ni2.5um/Au0.125um	4pcs	

DRAWN	Denis	SCALE		UNIT	mm	DRAWING NO.	HY41226288AM0618W
CHECKED		SHEET		PROJECT		TITLE:	4pin磁吸母端
APPROVED		DATE		VER.	D0		
MATERIAL		QTY					

THE UNMARKED TOLERANCE ARE AS BELOW:

LENGTH		ANGLE	
0-10	0.05mm	0.	2.0
10-50	0.10mm	0.0	1.0
50-120	0.15mm	0.00	0.50

Shenzhen Weixunda Electronic Technology Ltd.

THE INFORMATION IN THIS DOCUMENT IS PROPERTY OF HOYEE COMPANY AND SHOULD,NOT BE COPIED OR REPRODUCED IN ANY OTHER WAY,WITHOUT WRIT/HOYEE COMPANY WEBSITE:HTTP:WWW.CN-HOYEE.COM