

POWER SUPPLY ORING CIRCUIT

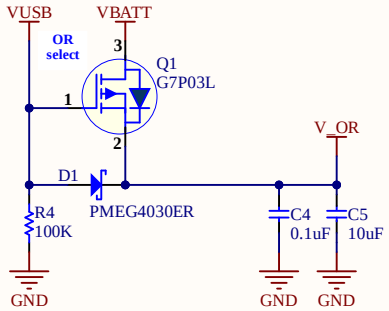


BATTERY CHARGING CIRCUIT

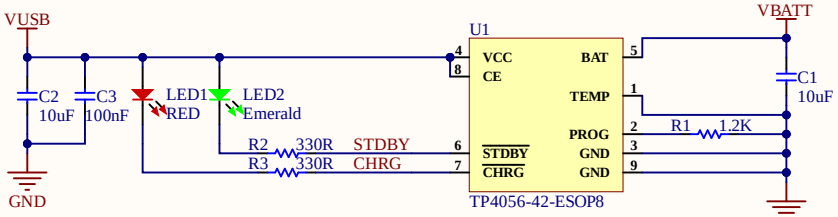


0.1uF capacitor should be placed closest to VCC pin

Battery Charging current = 1000mA

LDO_SECTION

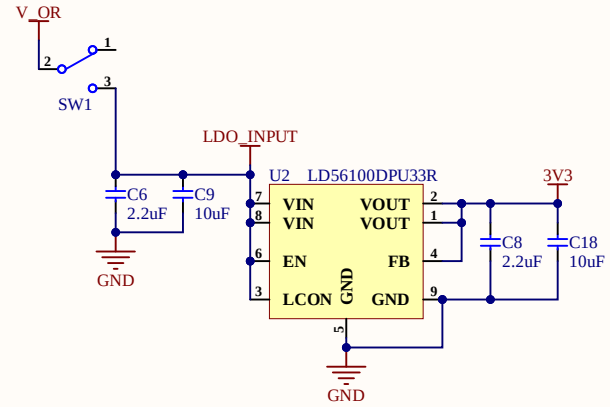

MOTOR_PS_3.3V

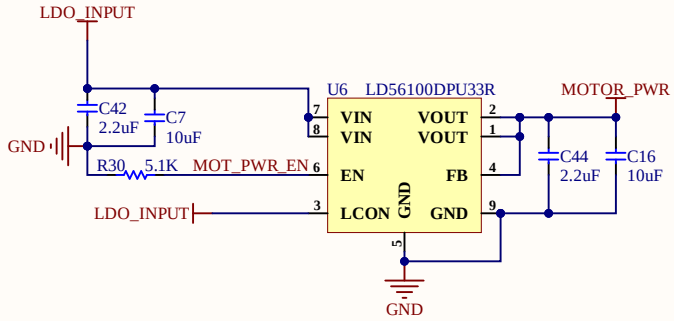

V_OR — V_OR

VUSB — VUSB

VBATT — VBATT

MOTOR_PWR — MOTOR_PWR

MOT_PWR_EN — MOT_PWR_EN


LDO_INPUT — LDO_INPUT

3V3 — 3V3


eSpark Consulting Group

Title: Power_Sheet.SchDoc	
File: Thread Tension Gauge.PrjPcb	
Date: 08/01/2025	Page Num: 1
Drawn By: Huzaifa Ali	Page Total: 4


RESET




BOOT




TARE_BUTTON




UNIT_TOGGLE




ESP32-S3

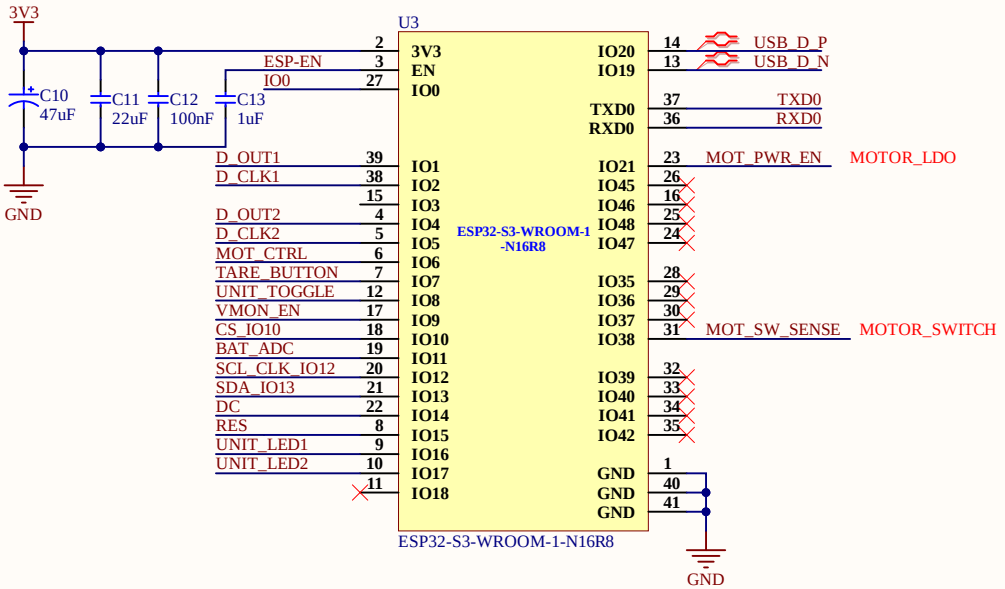





UNIT_LED

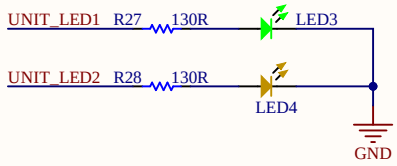



MOTOR_SWITCH_SENSE

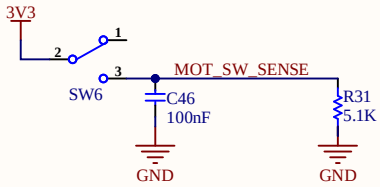


MOTOR_MOSFET_CONTROL

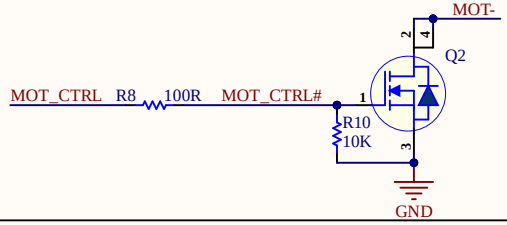

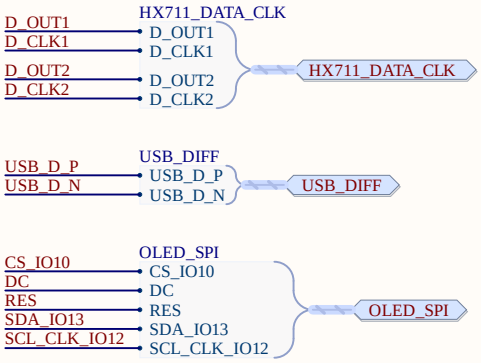




Detect Battery Voltage

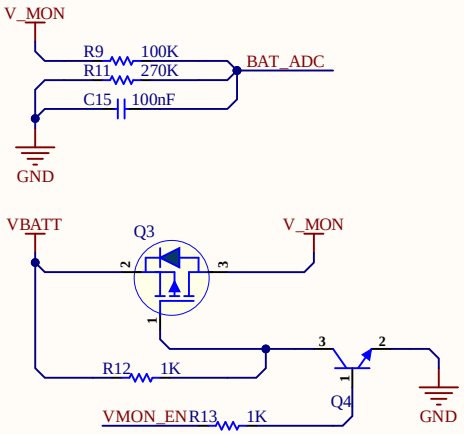




Title: Controller_sheet.SchDoc	
File: Thread Tension Gauge.PrjPcb	
Date: 08/01/2025	Page Num: 2
Drawn By: Huzaifa Ali	Page Total: 4


USB-C_INPUT

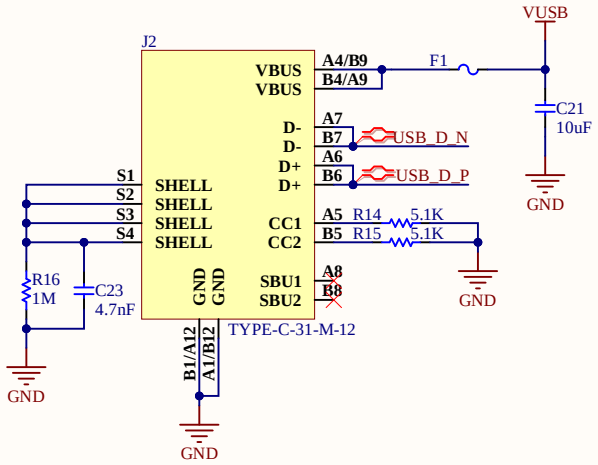


BATTERY INPUT



MOTOR CONNECTOR

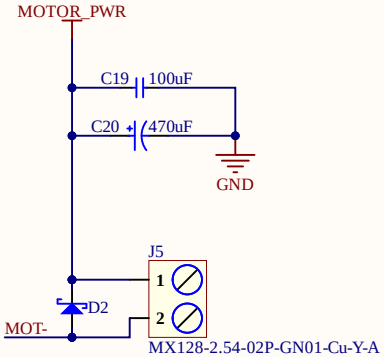

LOAD CELL CONNECTOR

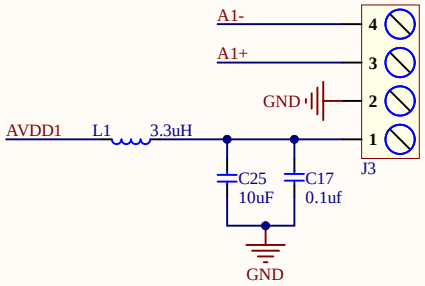


Add Load Cell in peripherals

LEDs




OLED CONNECTOR





Add OLED Display in peripherals

LOAD CELL CONNECTOR

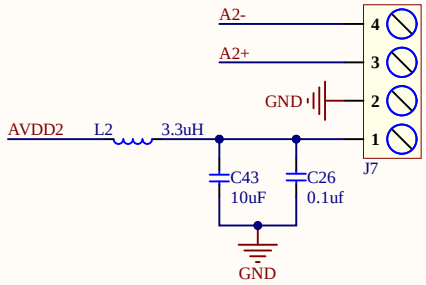


Add Load Cell in peripherals

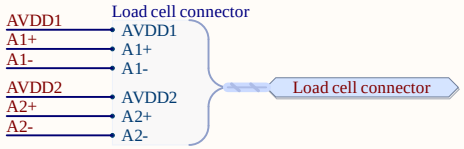





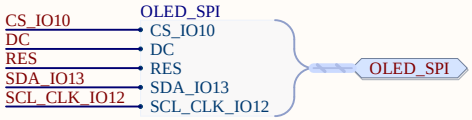


eSpark Consulting Group

Title: Connector_Sheet.SchDoc


File: Thread Tension Gauge.PrjPcb


Date: 08/01/2025	Page Num: 3
Drawn By: Huzaifa Ali	Page Total: 4

HX711 LOAD_CELL

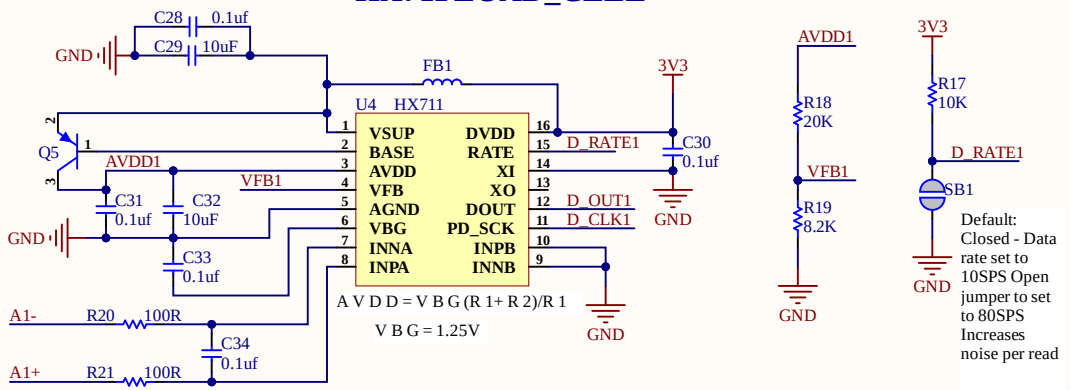

HX711 LOAD_CELL

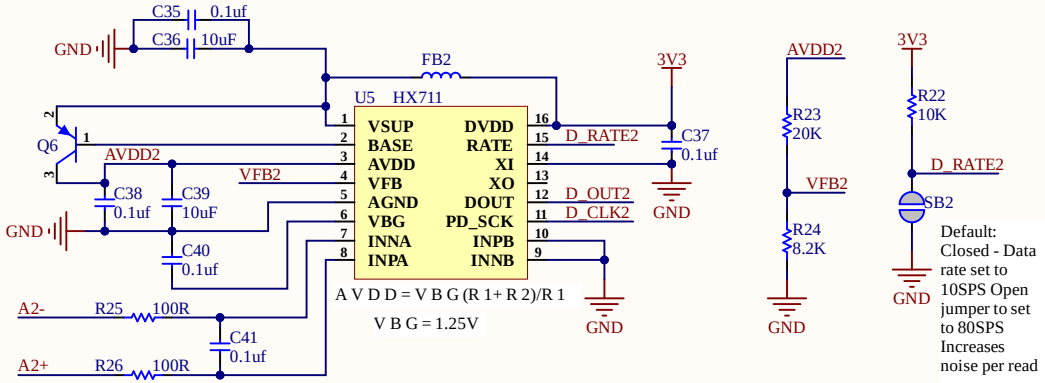

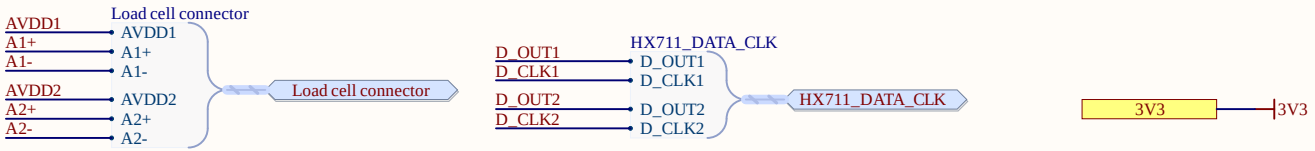

eSpark Consulting Group

Title: Load cell_Sheet.SchDoc		
File: Thread Tension Gauge.PrjPcb		
Date: 08/01/2025	Page	Num: 4
Drawn By: Huzaifa Ali	Page	Total: 4