

ANTENNA

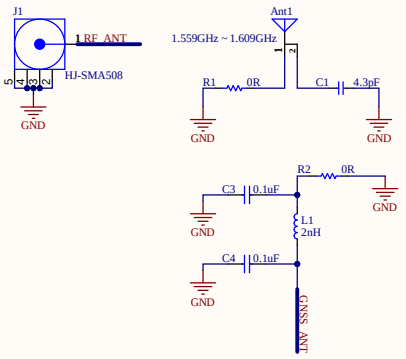


SIM7500E

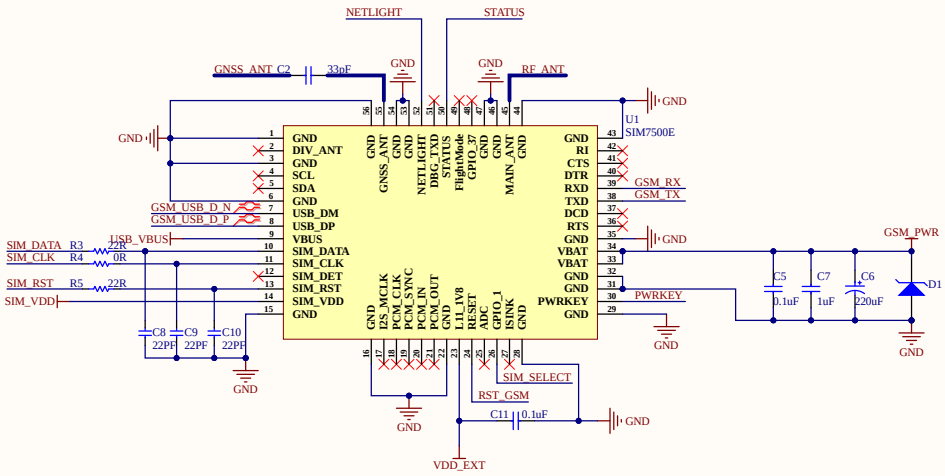


SIM Card Design Guide
SIM card signal could be interferenced by some high frequency signal, it is strongly recommendedtofollowthese guidelines while designing:
- SIM card holder should be far away from main antenna
- SIM traces should keep away from RF lines, VBAT and high-speed signal lines
- The traces should be as short as possible
- Keep SIM card holder's GND connect to main ground directly
- Shielding the SIM card signal by ground well
- Recommended to place a 100nF capacitor on SIM_VDD line and keep close to the SIMcardholder
- Add some TVS which parasitic capacitance should not exceed 50pF
- Add 22Ω resistor to (SIM_RST/SIM_CLK/SIM_DATA) signal could enhance ESDprotection Mount 22pF capacitor to (SIM_RST/SIM_CLK/SIM_DATA) signal if having RF signal interference

Datasheet Pg 31


Mini PCIe Connector Male

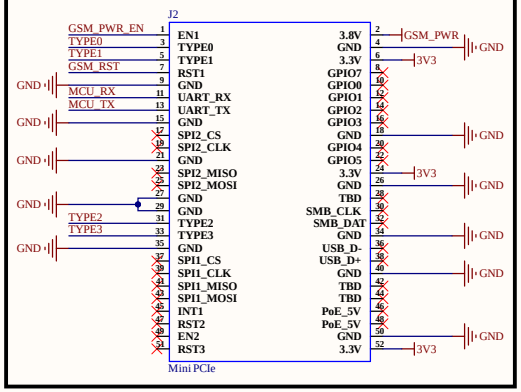


GSM_COMMANDS

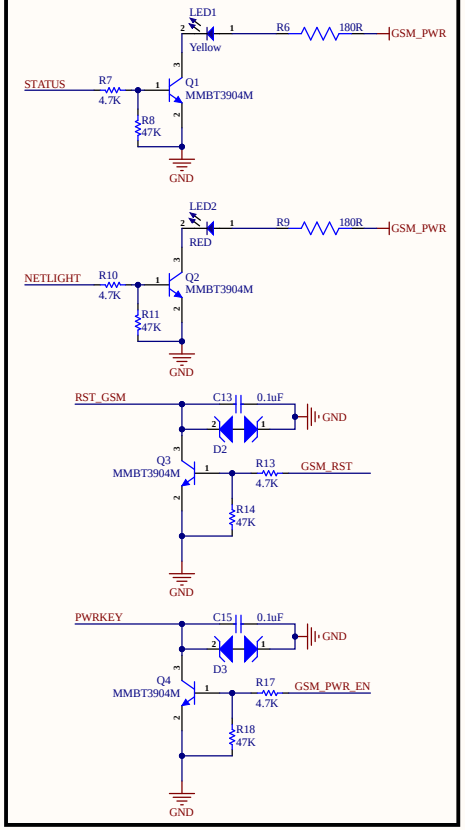


DUALSIM WITH MULTIPLEXER

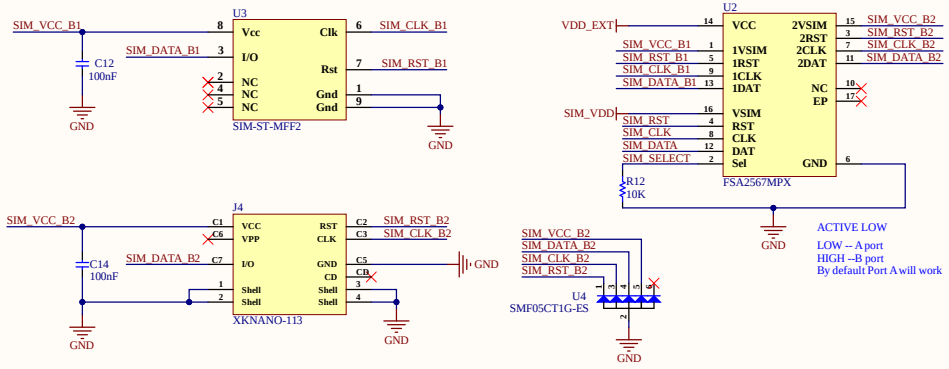


USB POGO for Updates



Level Shifter for GSM Serial

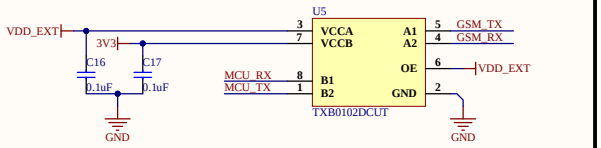

COMMS MODULE INDICATION



LTE Module indication is 0000

Cannot open file
D:\eSpark-Consultants\eSpark-Hardware\Altium Template\espark-consulting-group-800x300.jpg.
File does not exist.

Title: LTE_Sheet.SchDoc	
File: LTE_MODULE_v2.0.PrjPcb	
Date: 6/17/2023	Page Num: 1
Drawn By: Huzaifa Ali	Page Total: 1