

ANTENNA

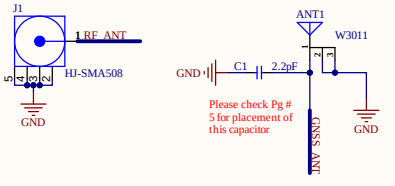


Ground cleared under antenna, clearance area 4.00 x 4.25 mm
Feed line should be designed to match 50 ohm characteristic impedance, depending on PWB material and thickness.
Recommended test board layout for electrical characteristic measurement, test board outline size 80 x 37 mm.
For more info check datasheet

GSM_COMMANDS

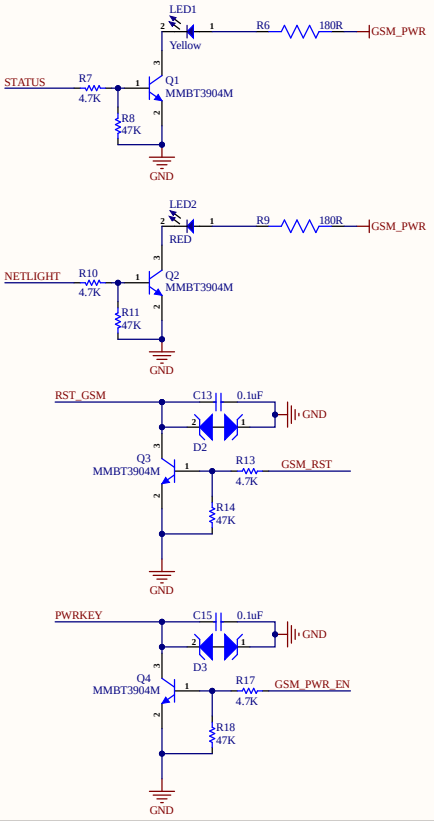


SIM7500E

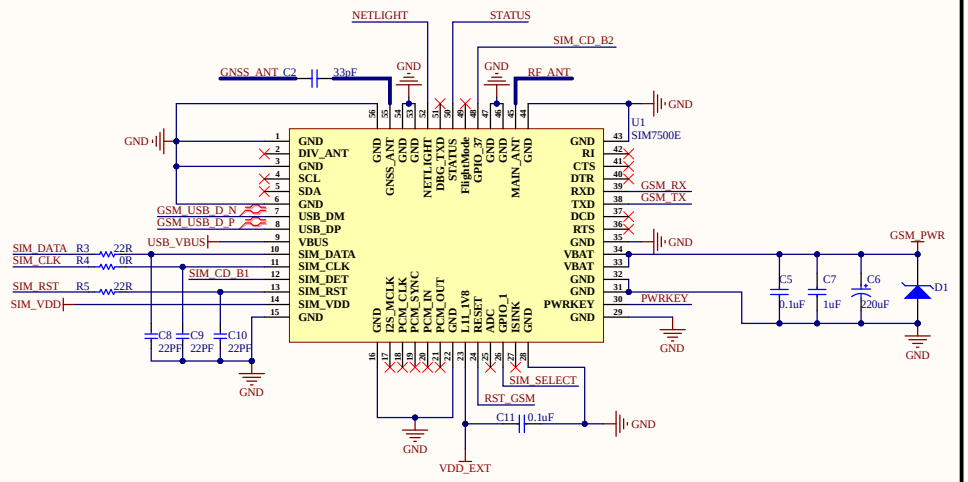


SIM Card Design Guide
SIM card signal could be interferenced by some high frequency signal, it is strongly recommendedtofollowthese guidelines while designing:
- SIM card holder should be far away from main antenna
- SIM traces should keep away from RF lines, VBAT and high-speed signal lines
- The traces should be as short as possible
- Keep SIM card holder's GND connect to main ground directly
- Shielding the SIM card signal by ground well
- Recommended to place a 100nF capacitor on SIM_VDD line and keep close to the SIMcardholder
- Add some TVS which parasitic capacitance should not exceed 50pF
- Add 22Ω resistor to (SIM_RST/SIM_CLK/SIM_DATA) signal could enhance ESDprotection Mount 22pF capacitor to (SIM_RST/SIM_CLK/SIM_DATA) signal if having RF signal interference

Datasheet Pg 31


Mini PCIe Connector Male

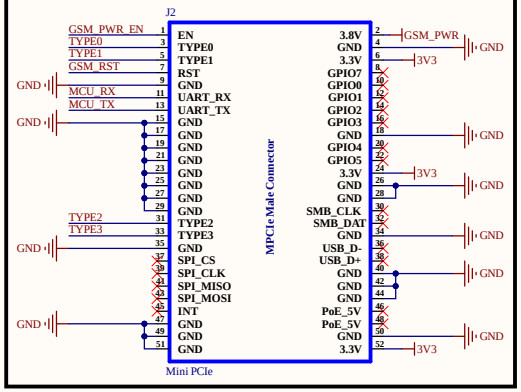


USB POGO for Updates




DUALSIM WITH MULTIPLEXER

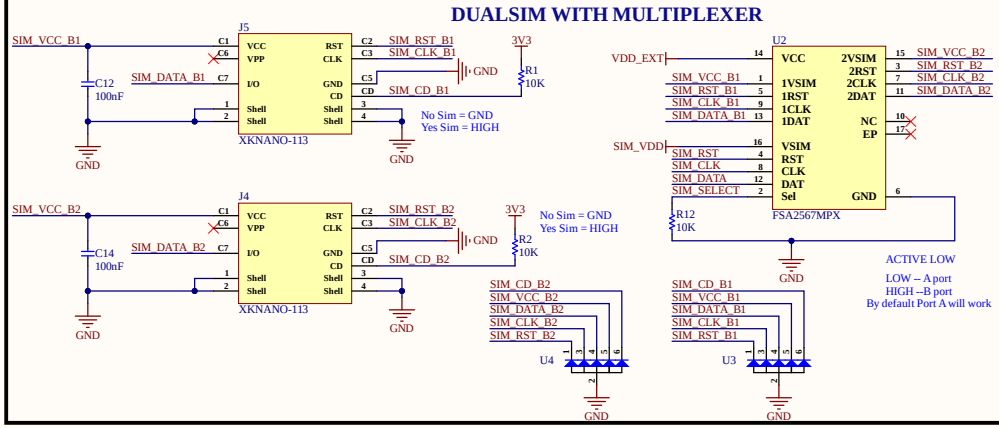

Level Shifter for GSM Serial

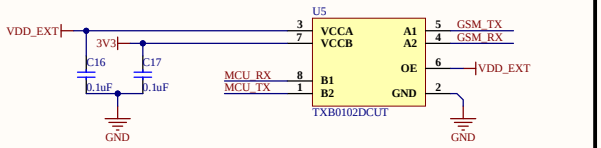

COMMS MODULE INDICATION



LTE Module indication is 0100

Cannot open file D:\eSpark-Consultants\eSpark-Hardware\Altium Template\espark-consulting-group-800x300.jpg. File does not exist.

Title: LTE_Sheet.SchDoc	
File: LTE_MODULE_v2.0.PrjPcb	
Date: 6/28/2023	Page Num: 1
Drawn By: Huzaifa Ali	Page Total: 1