
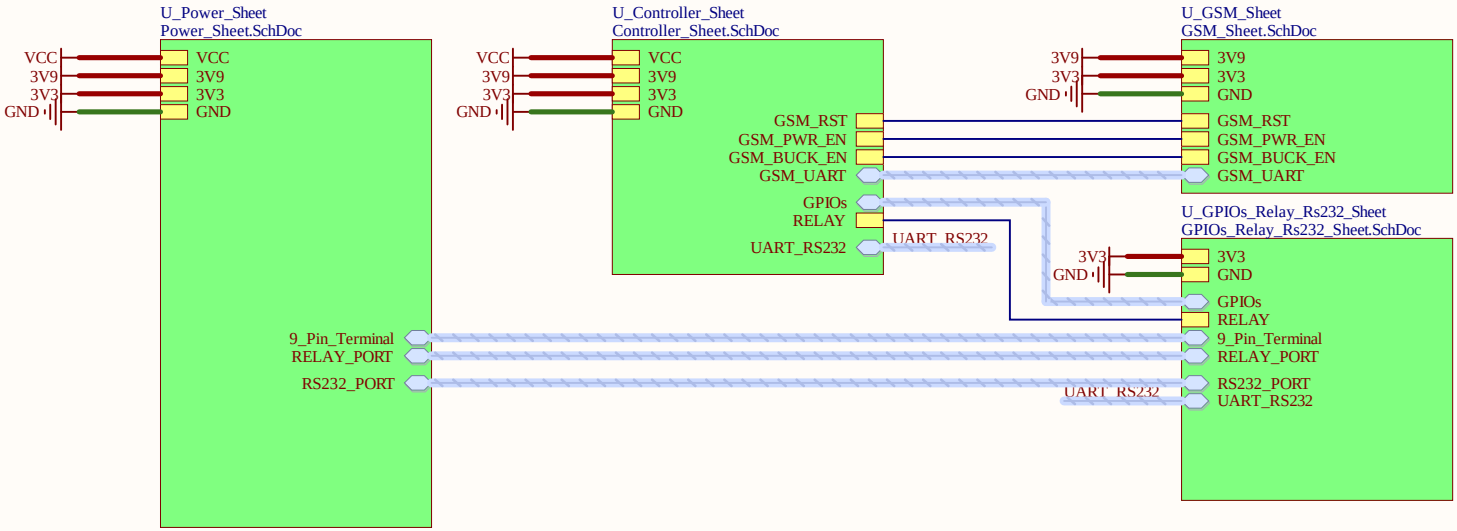



Cannot open file D:\eSpark-Consultants\eSpark-Hardware\Altium Template\espark-consulting-group-800x300.jpg. File does not exist.

Title: Top_Sheet.SchDoc	
File: Light_SPT_Device_v1.0.PrjPcb	
Date: 9/6/2023	Page Num: 1
Drawn By: Huzaifa Ali	Page Total: 5


9-30V DC INPUT




3.9V BUCK REGULATOR

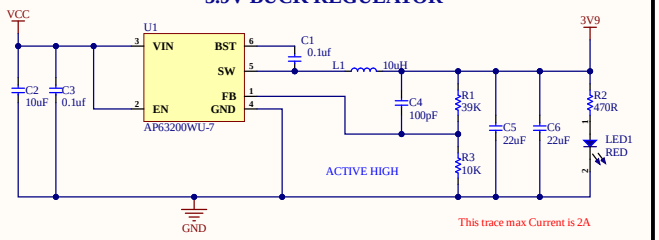


SCREW TERMINALS




3V3 BUCK REGULATOR

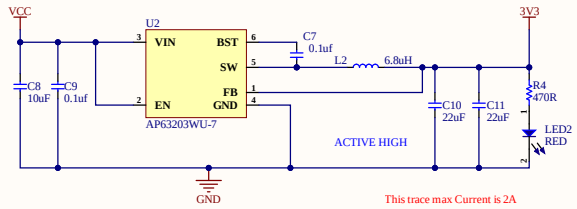












TEST POINTS





Cannot open file D:\eSpark-Consultants\eSpark-Hardware\Altium Template\espark-consulting-group-800x300.jpg. File does not exist.


Title: Power_Sheet.SchDoc	
File: Light_SPT_Device_v1.0.PrjPcb	
Date: 9/6/2023	Page Num: 2
Drawn By: Huzaifa Ali	Page Total: 5

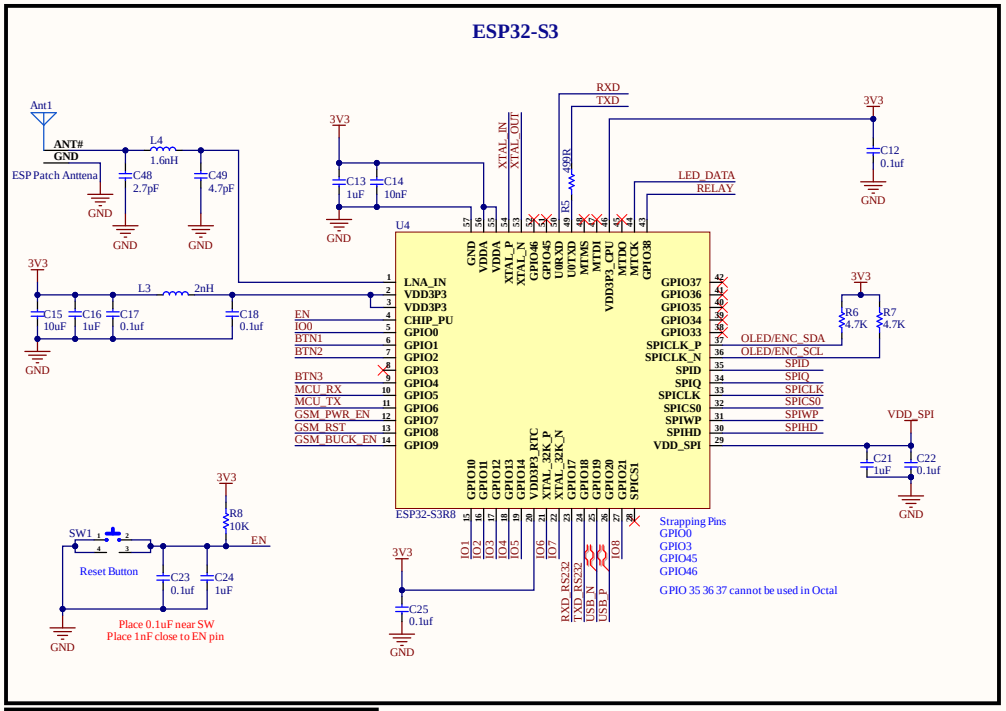


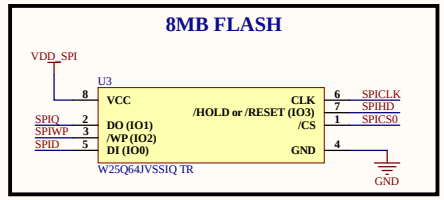


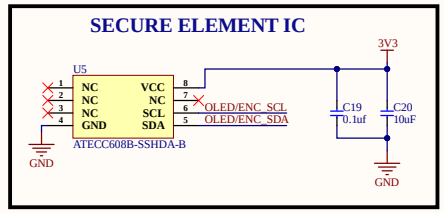


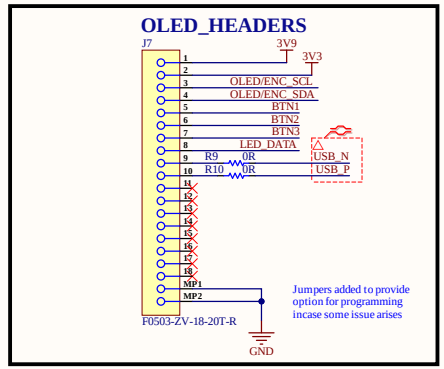


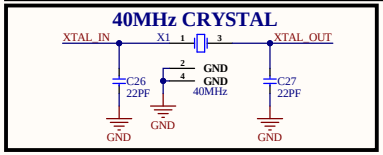











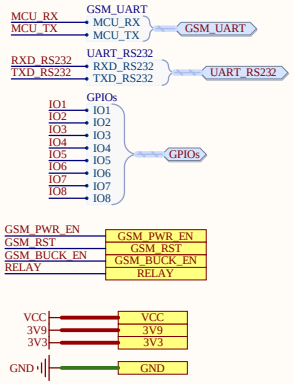

Cannot open file
D:\eSpark-Consultants\eSpark-Hardware\Altium Template\espark-consulting-group-800x300.jpg.
File does not exist.


Title: Controller_Sheet.SchDoc	
File: Light_SPT_Device_v1.0.PrjPcb	
Date: 10/6/2023	Page Num: 3
Drawn By: Huzaifa Ali	Page Total: 5

ANTENNA

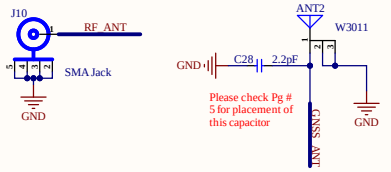


Ground cleared under antenna, clearance area 4.00 x 4.25 mm
Feed line should be designed to match 50 ohm characteristic impedance, depending on PWB material and thickness.
Recommended test board layout for electrical characteristic measurement, test board outline size 80 x 37 mm.
For more info check datasheet

GSM_COMMANDS

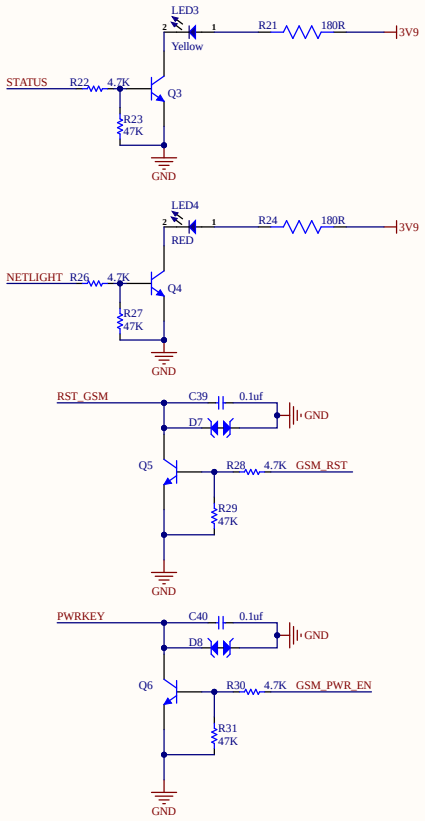


SIM7500E

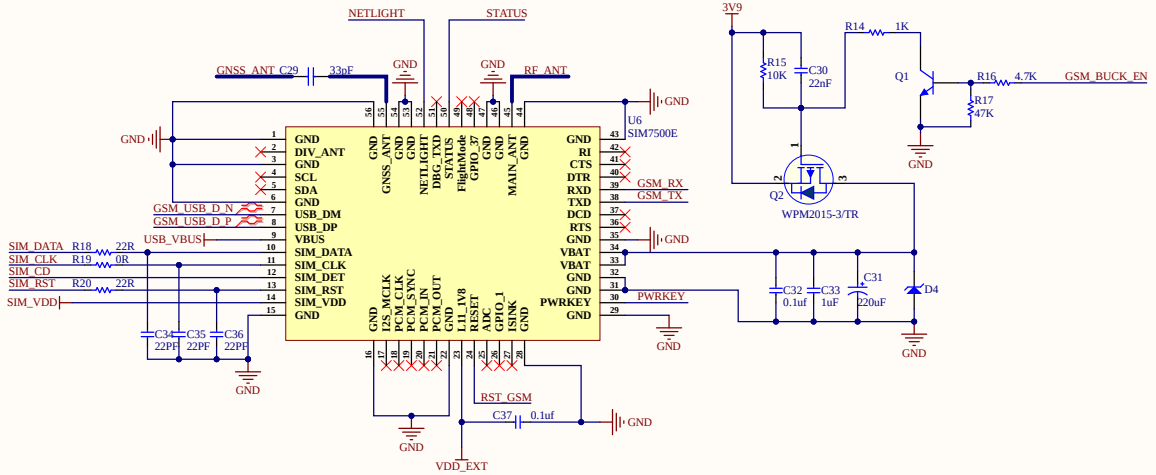


SIM Card Design Guide
SIM card signal could be interferenced by some high frequency signal, it is strongly recommendedtofollowthese guidelines while designing:
- SIM card holder should be far away from main antenna
- SIM traces should keep away from RF lines, VBAT and high-speed signal lines
- The traces should be as short as possible
- Keep SIM card holder's GND connect to main ground directly
- Shielding the SIM card signal by ground well
- Recommended to place a 100nF capacitor on SIM_VDD line and keep close to the SIMcardholder
- Add some TVS which parasitic capacitance should not exceed 50pF
- Add 22Ω resistor to (SIM_RST/SIM_CLK/SIM_DATA) signal could enhance ESDprotection Mount 22pF capacitor to (SIM_RST/SIM_CLK/SIM_DATA) signal if having RF signal interference

Datasheet Pg 31


NANOSIM CONNECTOR

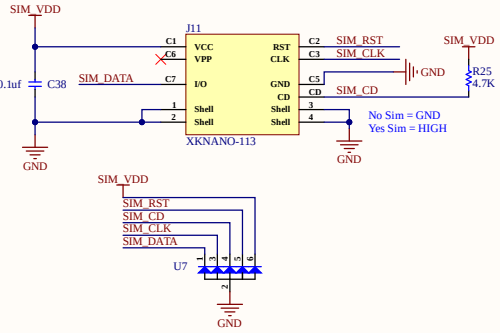


USB POGO for Updates



Level Shifter for GSM Serial

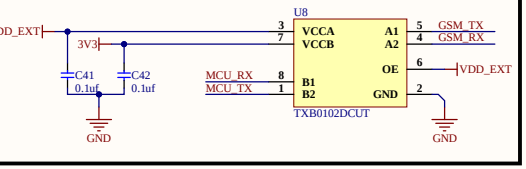





Cannot open file
D:\eSpark-Consultants\eSpark-Hardware\Altium Template\espark-consulting-group-800x300.jpg.
File does not exist.

Title: GSM_Sheet.SchDoc	
File: Light_SPT_Device_v1.0.PrjPcb	
Date: 9/6/2023	Page Num: 4
Drawn By: Huzaifa Ali	Page Total: 5


OPTO ISOLATION FOR GPIOs

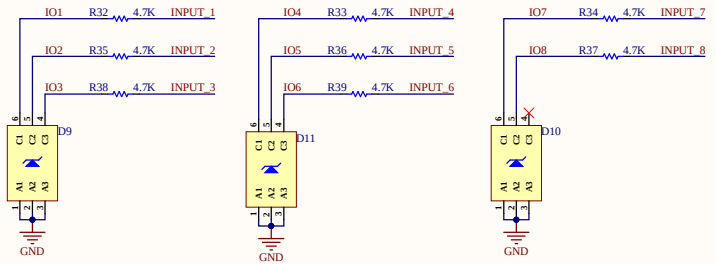


RS232 to UART

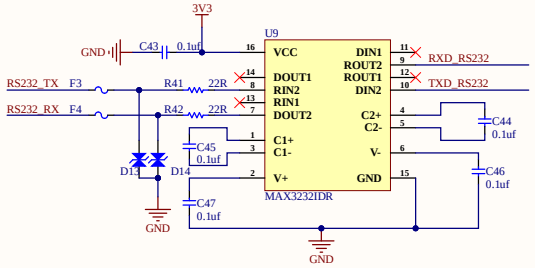


RELAY



GPIO PULLUP



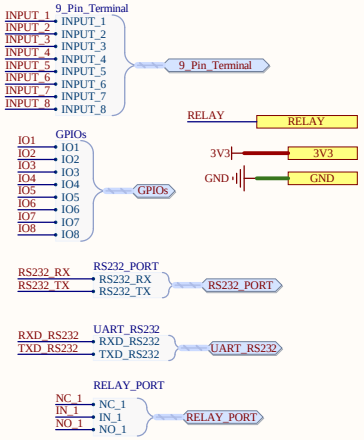

Cannot open file
D:\eSpark-Consultants\eSpark-Hardware\Altium Template\espark-consulting-group-800x300.jpg.
File does not exist.

Title: GPIOs_Relay_Rs232_Sheet.SchDoc	
File: Light_SPT_Device_v1.0.PrjPcb	
Date: 9/6/2023	Page Num: 5
Drawn By: Huzaifa Ali	Page Total: 5