





POWER BLOCK
U_Power-Section
Power-Section.SchDoc
VS
5V
VDD_3V3
VCC_12V
VCC_3V3_M
VS
VCC_5V
VDD_3V3
VCC_12V
VCC_3V3_M
GND
GND
STEPPER DRIVER
U_Stepper-Section
Stepper-Section.SchDoc
VS
VCC_12V
VDD_3V3
VOUT_5V
VCC_3V3_M
VS
VCC_12V
VDD_3V3
VOUT_5V
VCC_3V3_M
SPI-SENSOR
MOTOR_SPI
TMC_MODE
GND
GND
CONNECTORS
U_Connector-Section
Connector-Section.SchDoc
VS
5V
VDD_3V3
VOUT_5V
VS
VCC_5V
VDD_3V3
VOUT_5V
TMC_MODE
MOTOR_SPI
SPI-CS
SPI-CS
GND
GND
TEMP SENSING
U_Temp_Probe_Section
Temp_Probe_Section.SchDoc
VDD_3V3
VDD_3V3
SPI-SENSOR
SPI-CS
SPI-CS
GND
GND


ISOLATED POWER
U_Isolated-Power-Section
Isolated-Power-Section.SchDoc
VCC_12V
5V
VDD_3V3
VCC_12V
VCC_5V
VDD_3V3
GND
GND



MOTOR SUPPLY
U_Motor-Supply-Section
Motor-Supply-Section.SchDoc
VCC_3V3_M
VCC_12V
VS
VCC_3V3_M
VCC_12V
VS
GND
GND


VCC_12V
VCC_5V
VDD_3V3
VCC_12V
5V
VDD_3V3
VCC_3V3_M
VS
GND
VCC_3V3_M
VS
GND

DECOUPLING CAPS

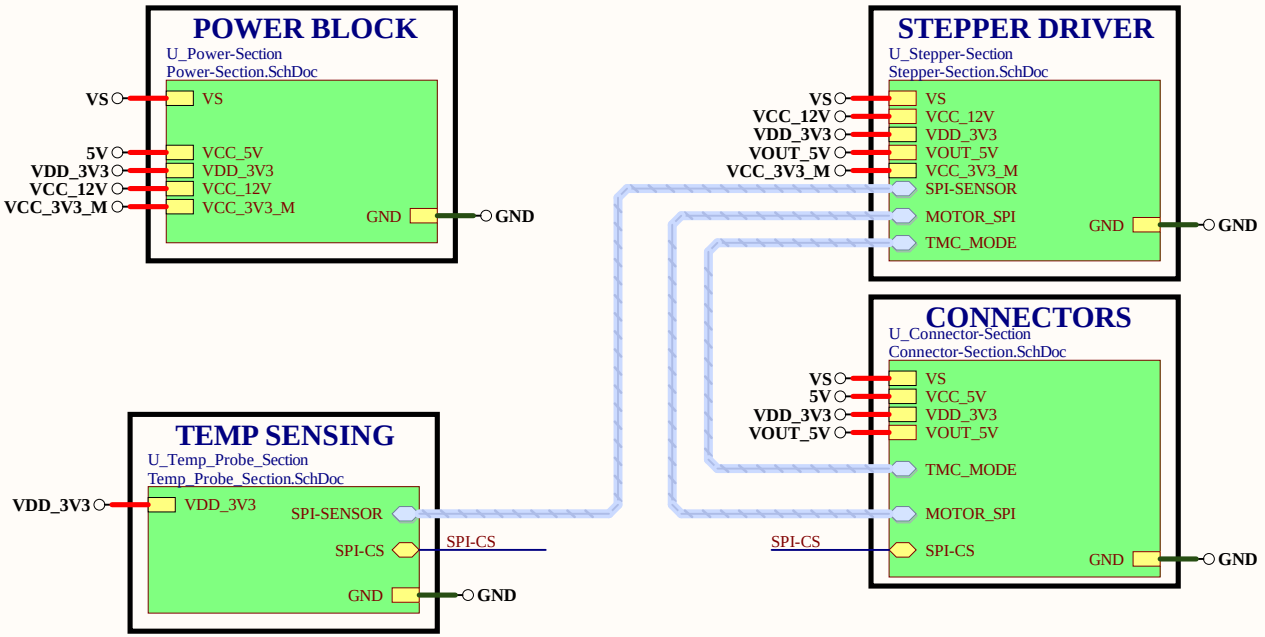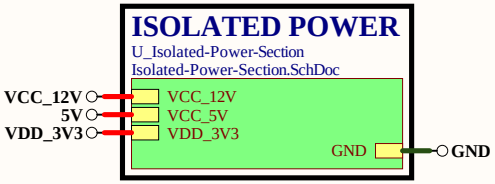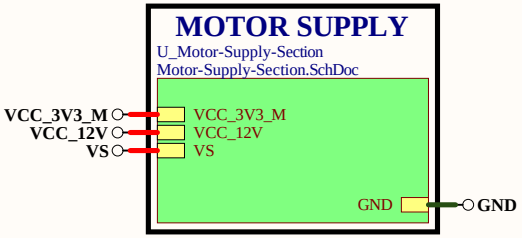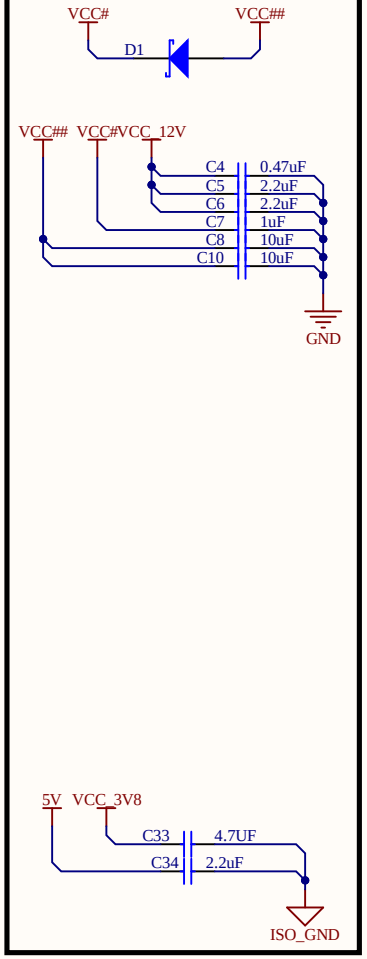


12V-3.8V ISOLATED BUCK CONVERTER

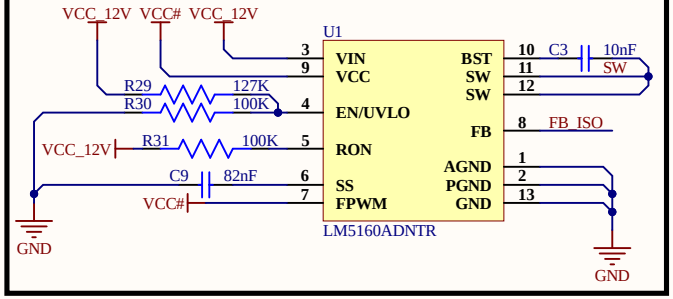


Primary side output voltage would be 5.7 for a 3.8V VSec (NP/Ns=Vpri/Vsec)
FB resistors RF2=3.7K and RF1=2K.
Max current of this transformer is 840mA. (suggested in datasheet)


3.8-3.3V LINEAR REGULATOR

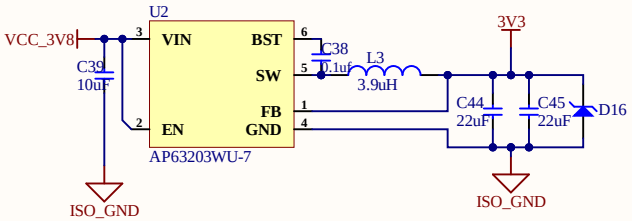


3.8-5V CHARGE PUMP

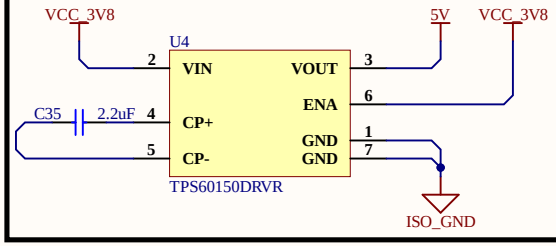


FEEDBACK NETWORK




FLYBACK TRANSFORMER

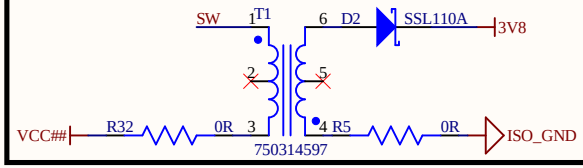


SUPPORTING CIRCUIT

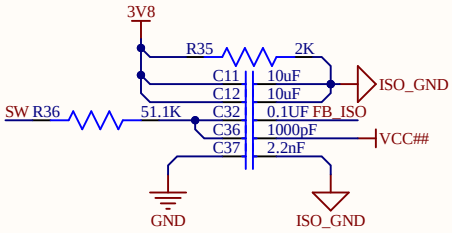


FERRITE CONNECTIONS

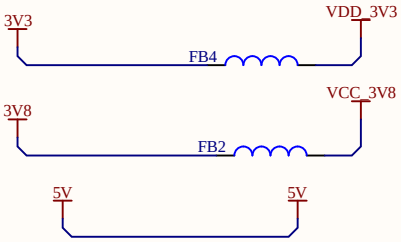





30V TO 12V NON-ISOLATED BUCK CONVERTER

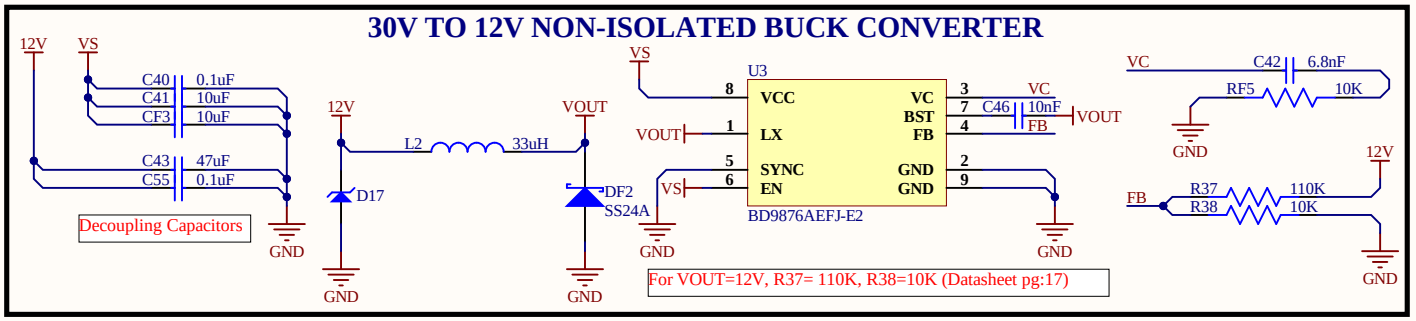



12 TO 3.3V BUCK CONVERTER

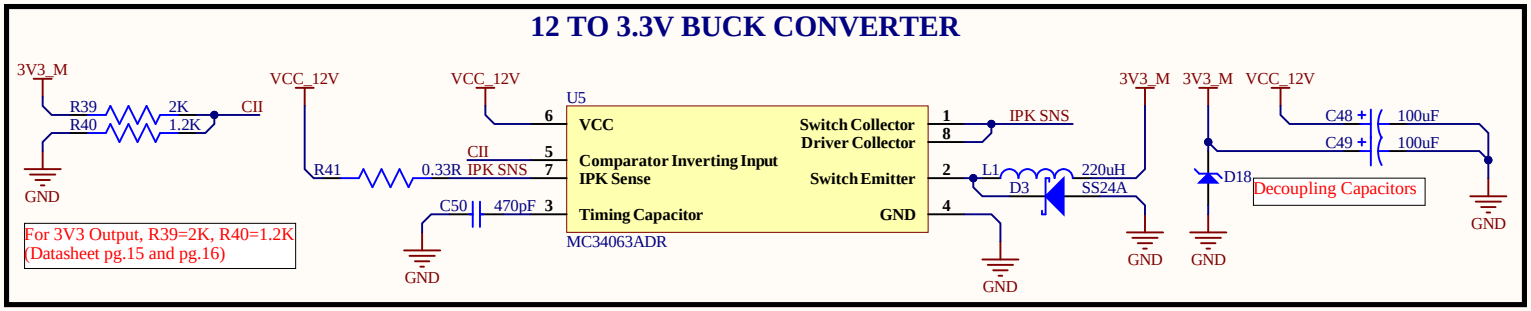



FERRITE CONNECTIONS

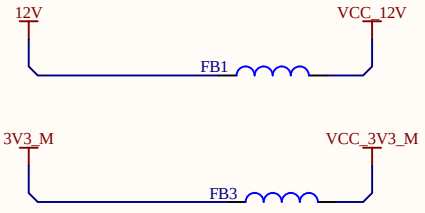




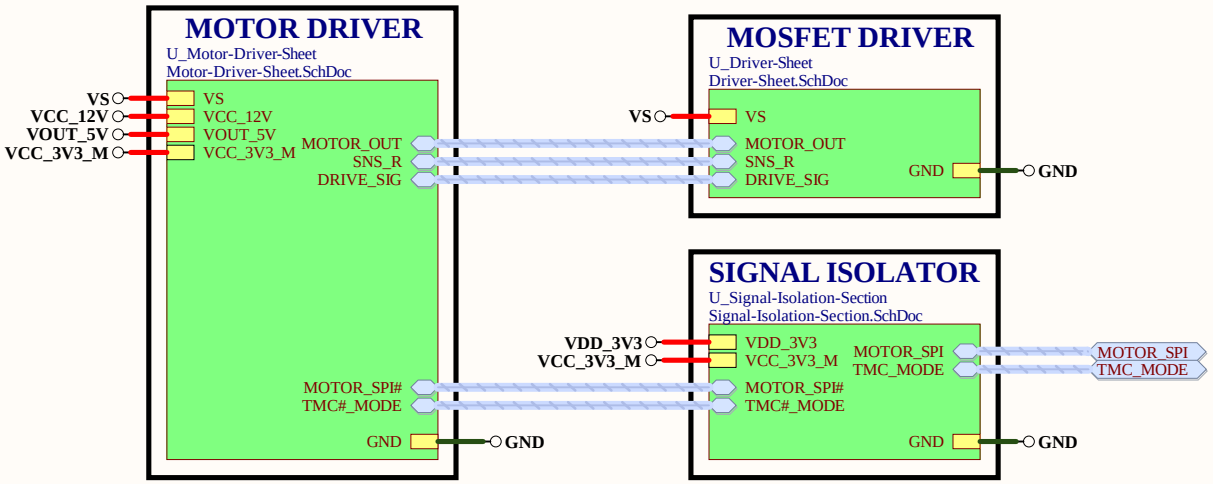
MOTOR DRIVER
U_Motor-Driver-Sheet
Motor-Driver-Sheet.SchDoc
VS
VCC_12V
VOUT_5V
VCC_3V3_M
VS
VCC_12V
VOUT_5V
VCC_3V3_M
MOTOR_OUT
SNS_R
DRIVE_SIG
MOTOR_SPI#
TMC#_MODE
GND
GND
MOSFET DRIVER
U_Driver-Sheet
Driver-Sheet.SchDoc
VS
VS
MOTOR_OUT
SNS_R
DRIVE_SIG
GND
GND
SIGNAL ISOLATOR
U_Signal-Isolation-Section
Signal-Isolation-Section.SchDoc
VDD_3V3
VCC_3V3_M
VDD_3V3
VCC_3V3_M
MOTOR_SPI
TMC_MODE
MOTOR_SPI#
TMC#_MODE
GND
GND
MOTOR_SPI
TMC_MODE



VS
VOUT_5V
VCC_12V
VDD_3V3
VS
VOUT_5V
VCC_12V
VDD_3V3
VCC_3V3_M
GND
VCC_3V3_M
GND

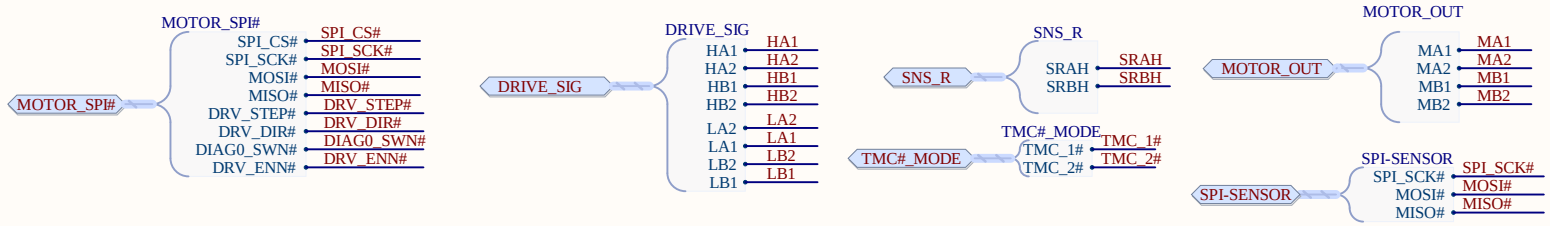


DECOUPLING CAPS

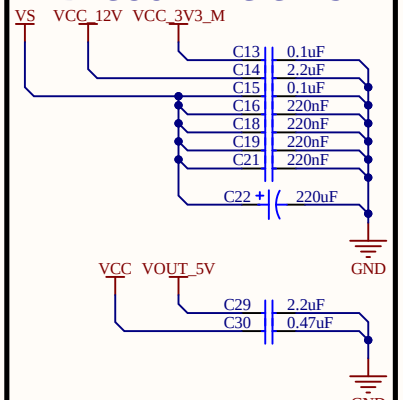


STEPPER MOTOR DRIVER-PART-A

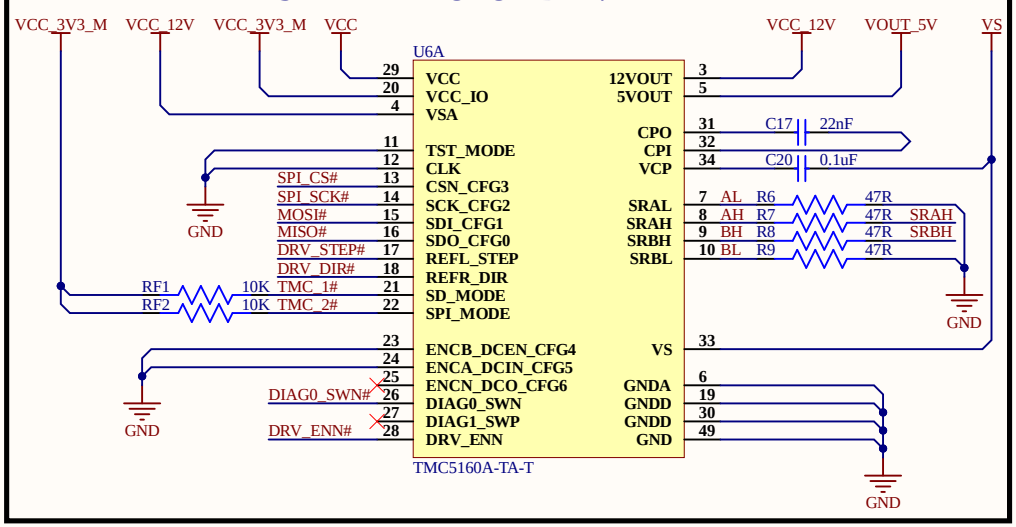


TEST POINTS




CURRENT SENSE RES




SERIES RESISTOR




MOTOR OUTPUT





STEPPER MOTOR DRIVER-PART-B

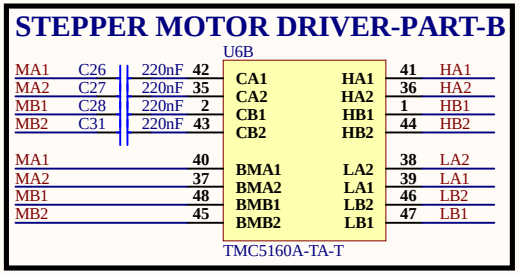


MOTOR OUTPUT FOR NEMA34






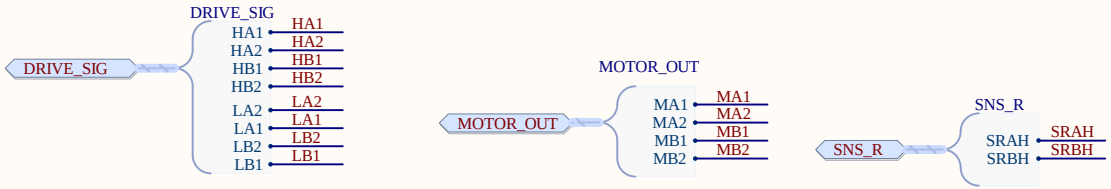


DRIVE MOSFETS

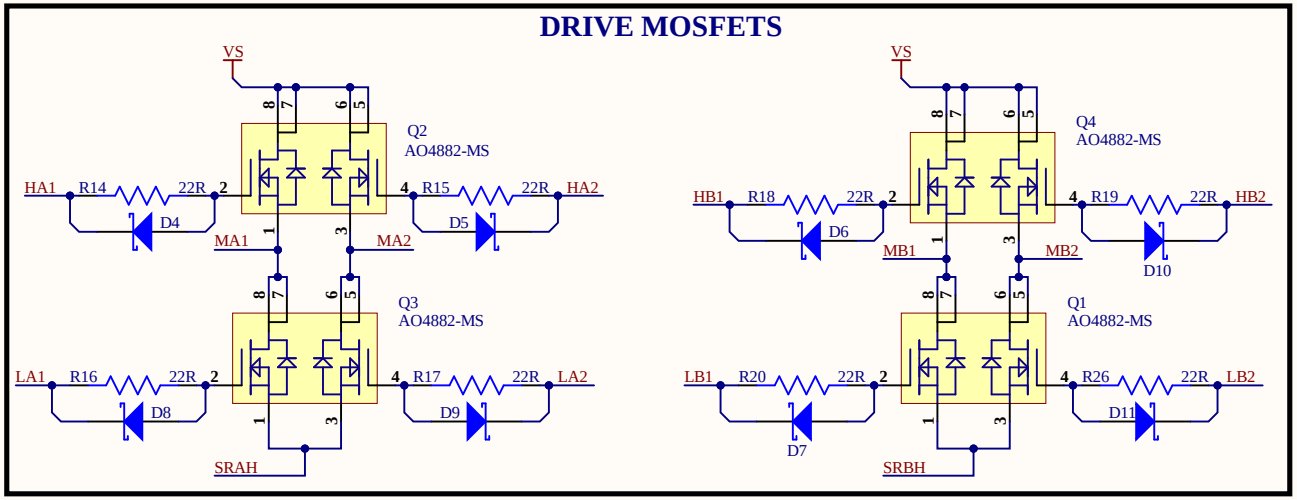



DECOUPLING CAPS







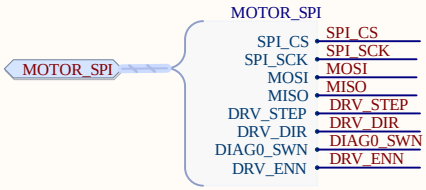


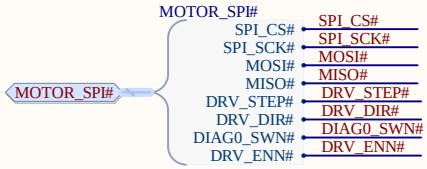





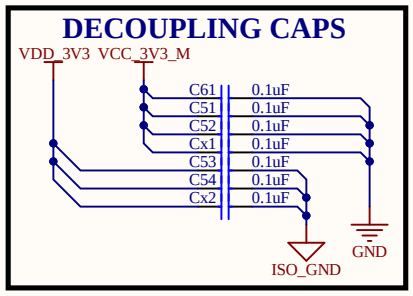


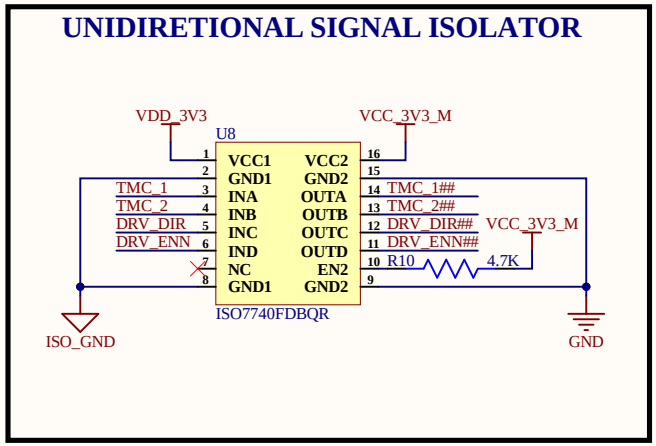

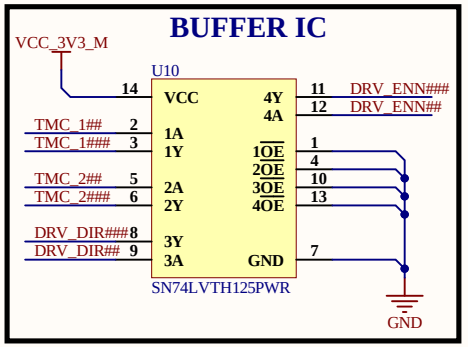

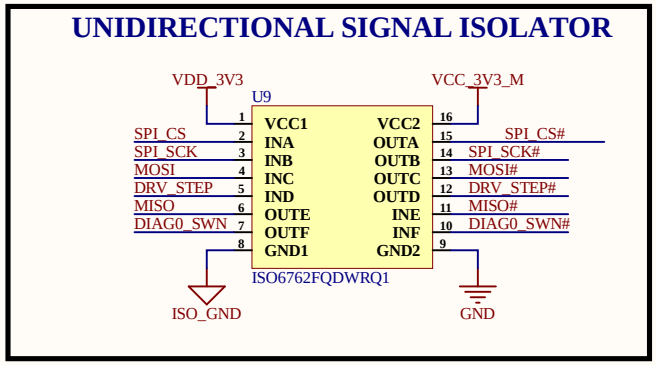


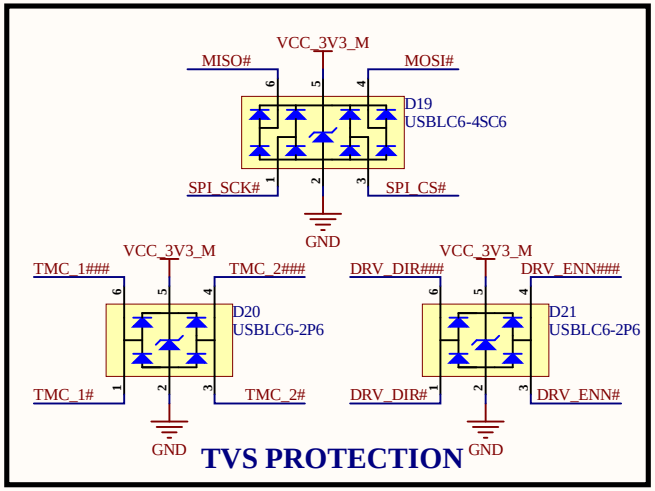




Title		
Size A4	Number	Revision
Date: 12-26-2023		Sheet of
File: E:\eSpark-Consultants\..\Signal-Isolation-Buffer.SchDoc		Drawn By:


SUPPORTING CIRCUIT



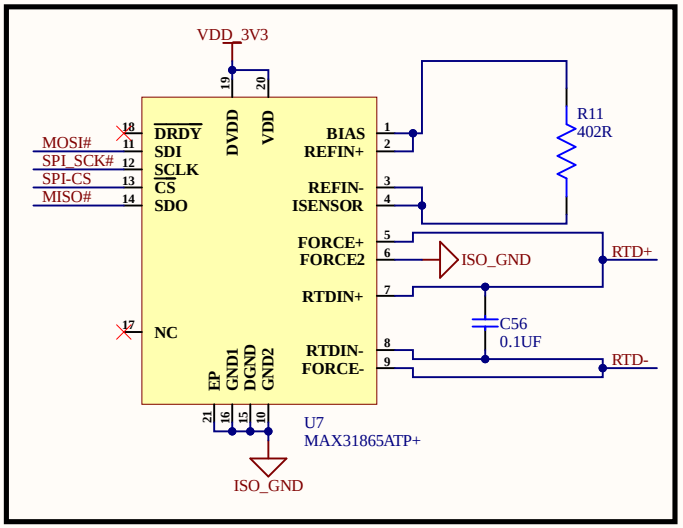



IC configured for 2-Wire PT100 Sensor

PT100 INPUT





2-Wire PT100






INDICATION FOR MOTOR 5V SUPPLY




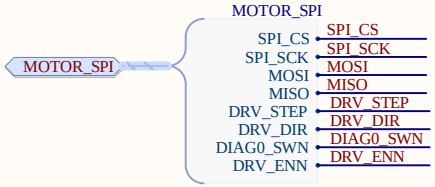


3.3V RGB LED

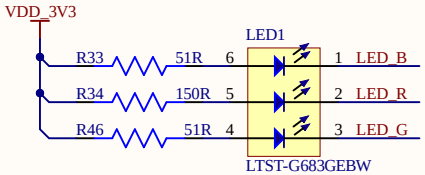


13 MM ACTUATOR

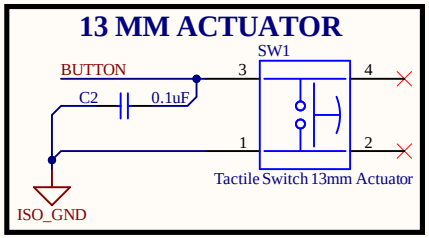


HEADERS TO SELECT BOOT MODE

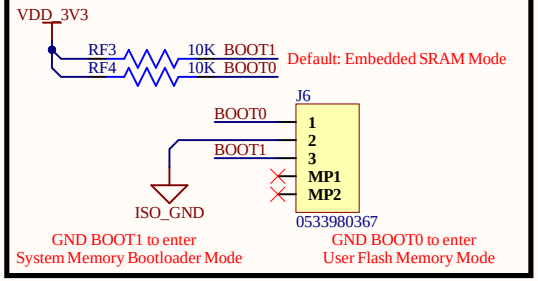


USB TYPE C FOR DATA TRANSFER

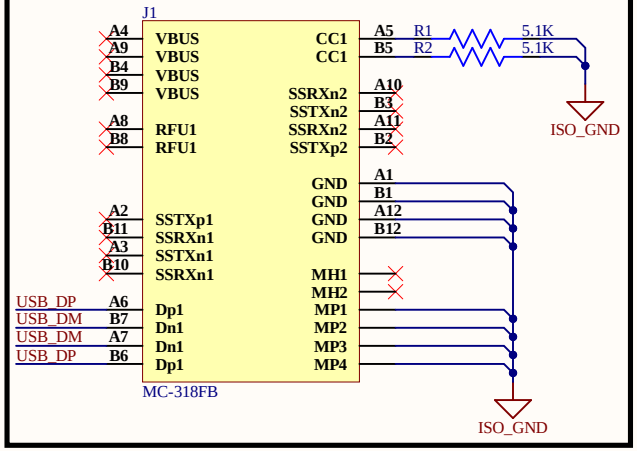


BOARD TO BOARD CONNECTOR

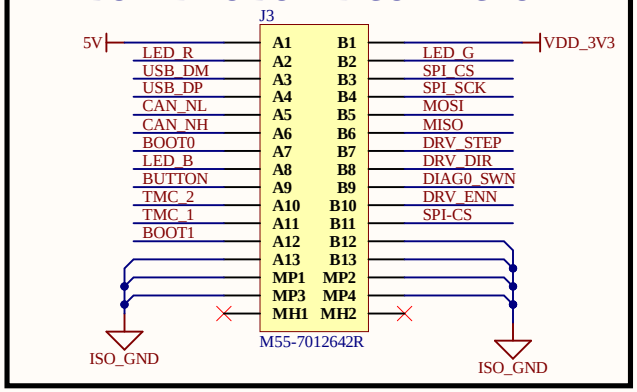


DECOUPLING CAP




ESD PROTECTION




TVS DIODES



TVS DIODES



INPUT CONNECTORS

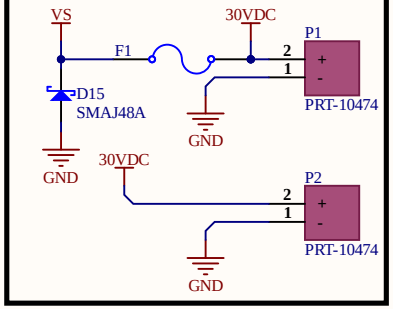

RJ45 FOR CAN BUS

