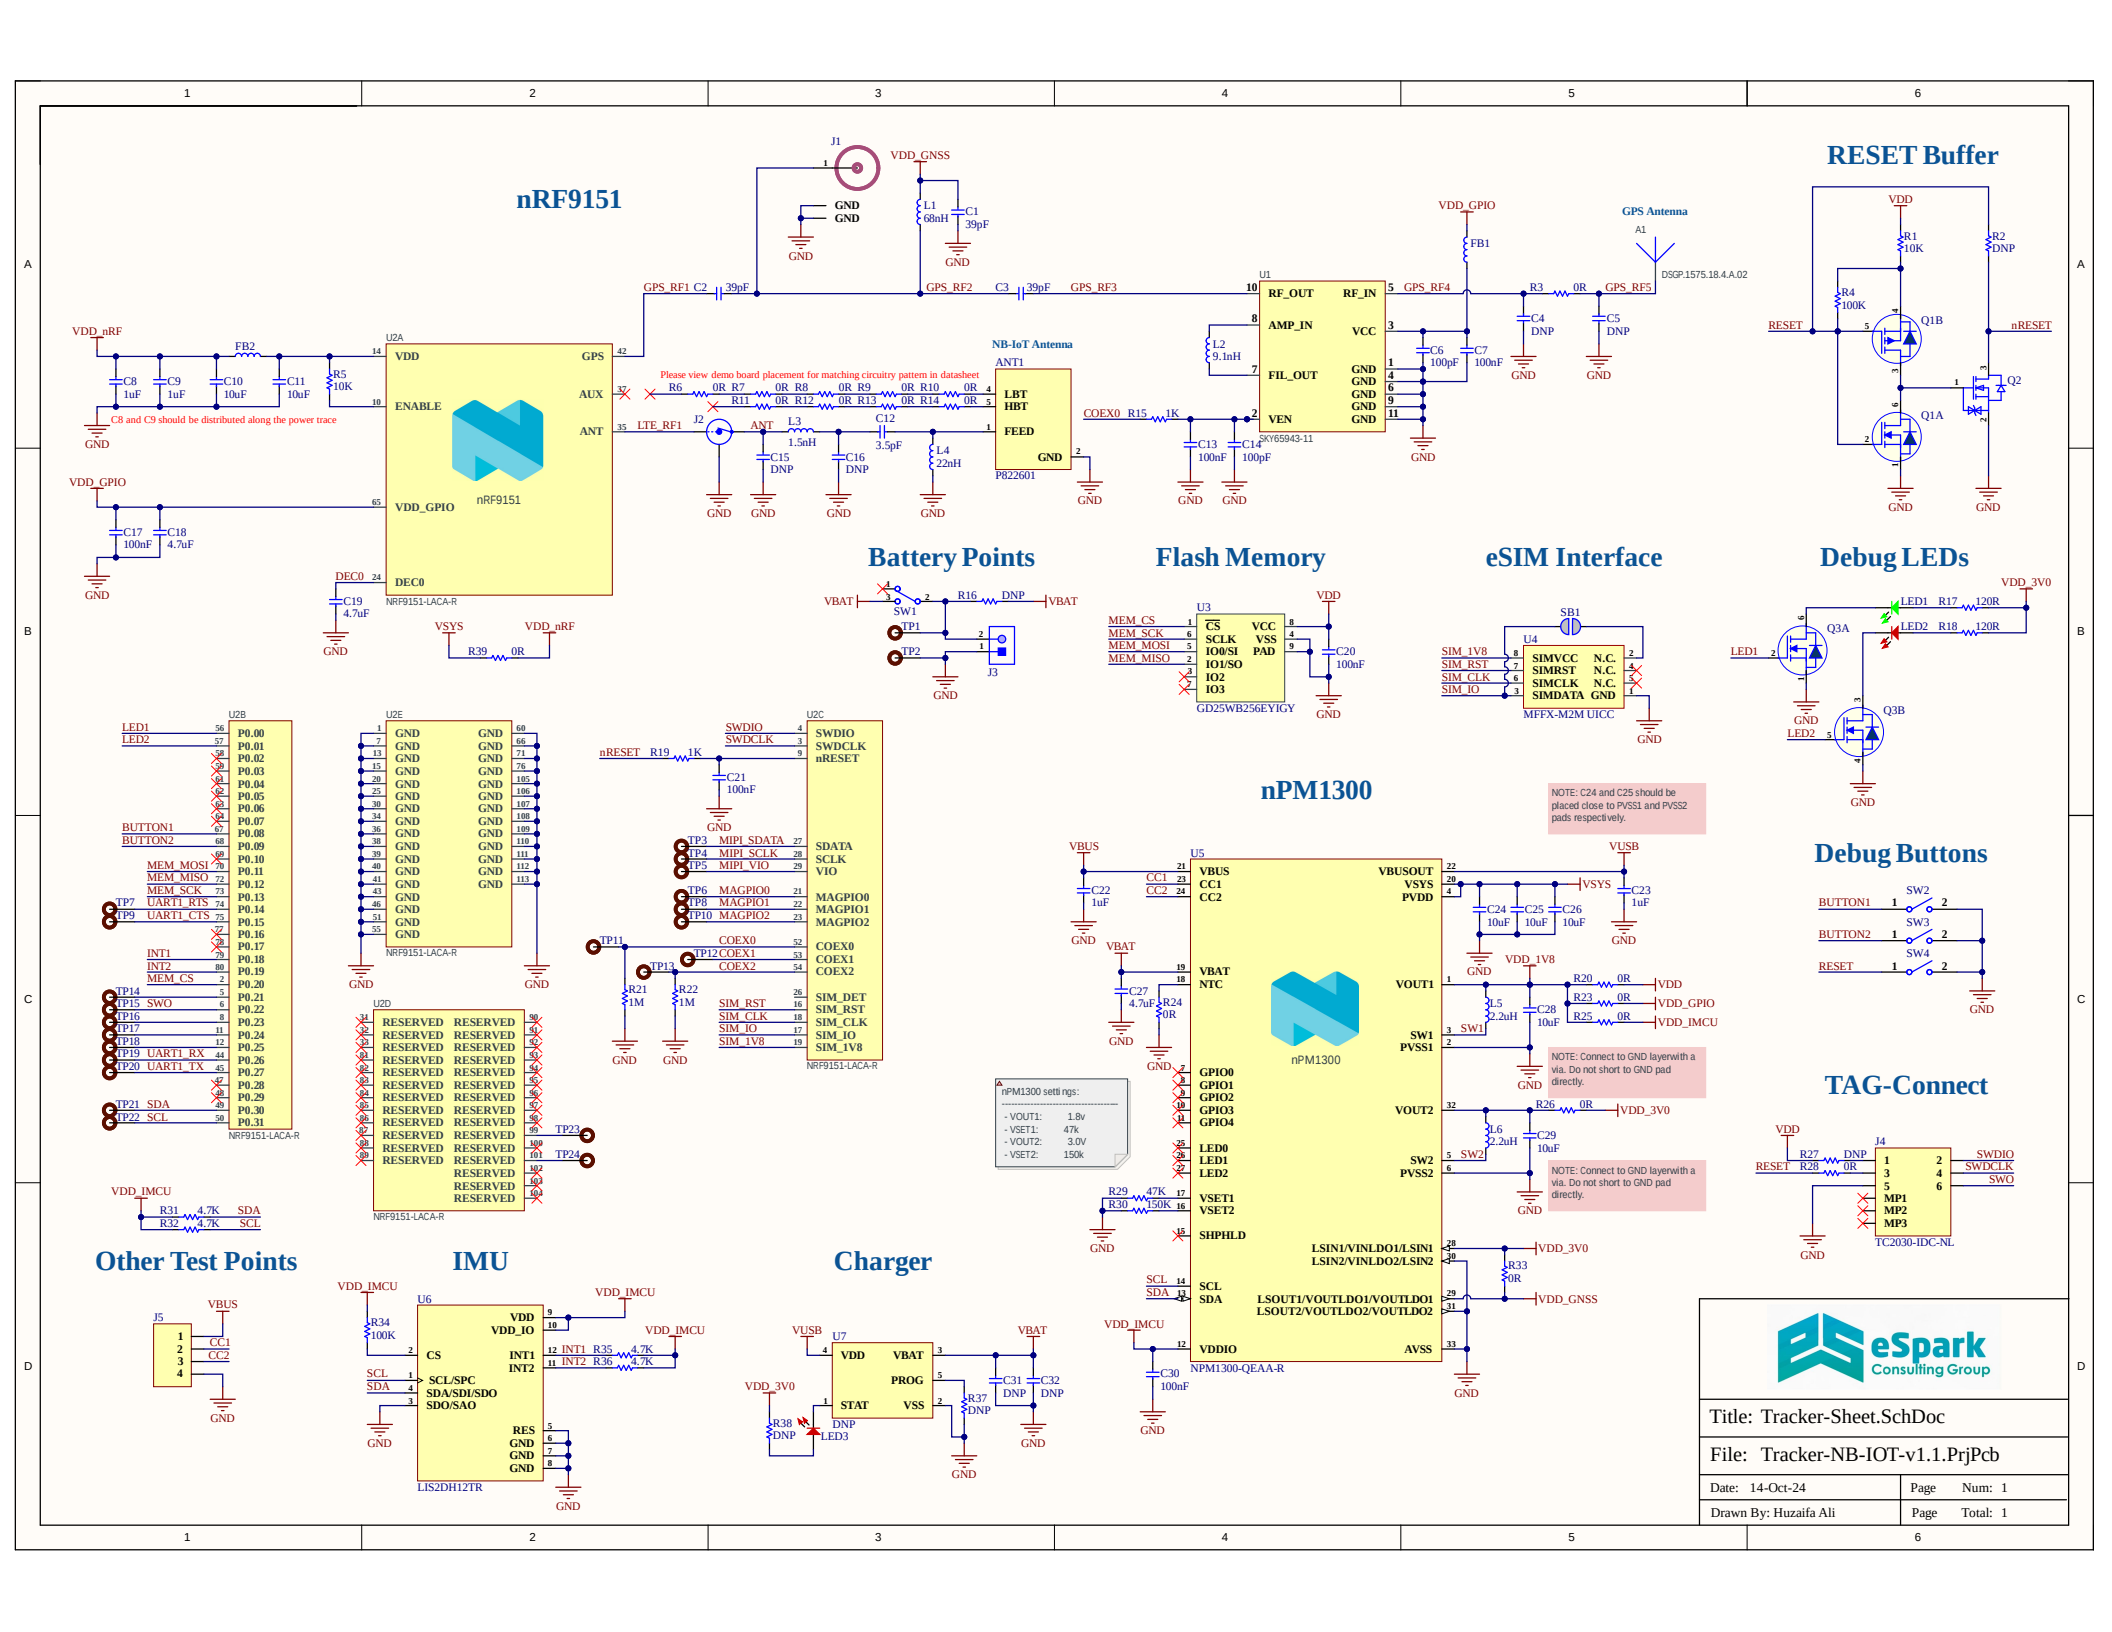

nRF9151
RESET Buffer
Battery Points
Flash Memory
eSIM Interface
Debug LEDs
nPM1300
Debug Buttons
TAG-Connect
Other Test Points
IMU
Charger
VDD_GNSS
VDD_nRF
VDD_GPIO
VDD_IMCU
VBAT
VSYS
VBUS
VUSB
GPS Antenna
NB-IoT Antenna
nRF9151-LACA-R
P822601
SKY65943-11
GD25WB256EYIGY
MFFX-M2M UICC
TC2030-IDC-NL
LIS2DH12TR
NPM1300-QEAA-R
C8 and C9 should be distributed along the power trace
Please view demo board placement for matching circuitry pattern in datasheet
NOTE: C24 and C25 should be placed close to PVSS1 and PVSS2 pads respectively.
NOTE: Connect to GND layerwith a via. Do not short to GND pad directly.
Title: Tracker-Sheet.SchDoc
File: Tracker-NB-IOT-v1.1.PrjPcb
Date: 14-Oct-24
Drawn By: Huzaifa Ali