



Title: Top-Sheet.SchDoc	
File: EamonElkhedrawi-BoardDesign.PrjPcb	
Date: 5/22/2024	Page Num: 1
Drawn By: Huzaifa Ali	Page Total: 3


POWER SUPPLY




SIGNAL ISOLATOR pH and EC




DS TEMP




EXTRA SENSOR




FANS

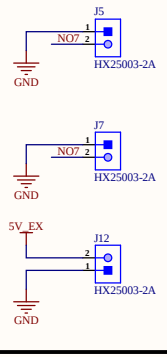


CURRENT SENSOR




LIQUID LEVEL




WATER FLOW




USB C




RPI CONNECTIONS




DB9

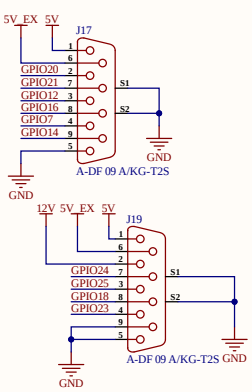


FLOAT




SOLENOID VALVE




DHT22




ADC



12V

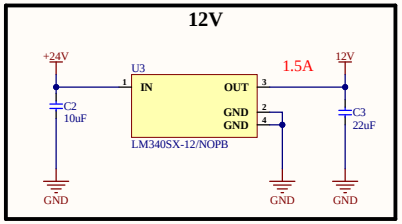


5V_EXT

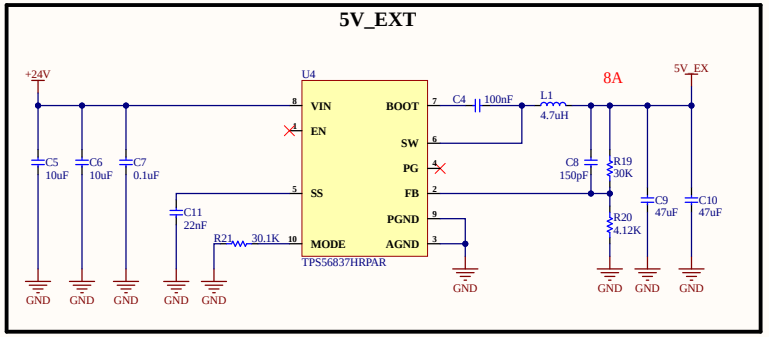


5V_EXT TRACE TO USB SHOULD BE CAPABLE OF HANDLING 5A

Total Amps on 5V: 4.5A RPI, 15*30mA relays, 2A fan = 6.95A

Total Amps in 12V: 12V is for peripherals. Not used within board. 4.5A rated on client's supply









eSpark Consulting Group


Title: ConnectorSheet-v1.1.SchDoc	
File: EamonElkhedrawi-BoardDesign.PrjPcb	
Date: 5/31/2024	Page Num: 2
Drawn By: Huzaifa Ali	Page Total: 3

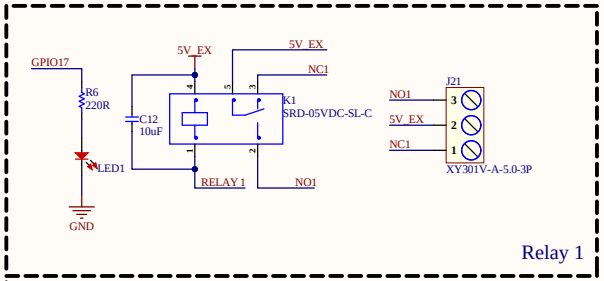


Relay 1

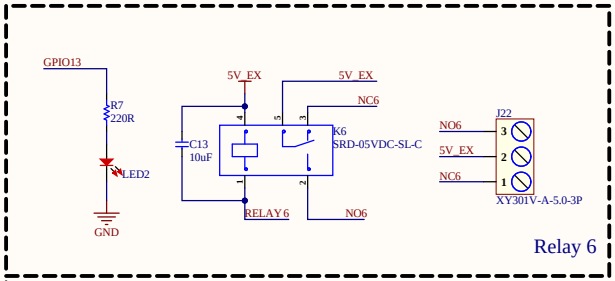


Relay 6

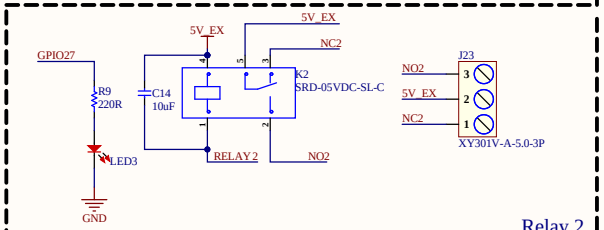


Relay 2

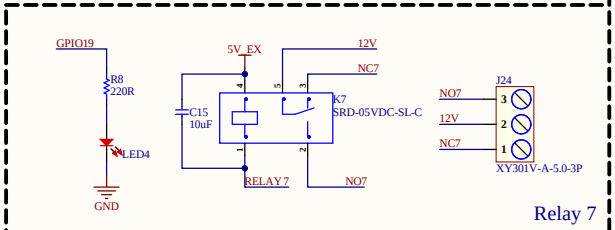


Relay 7

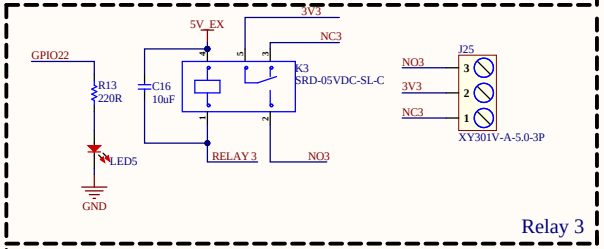


Relay 3

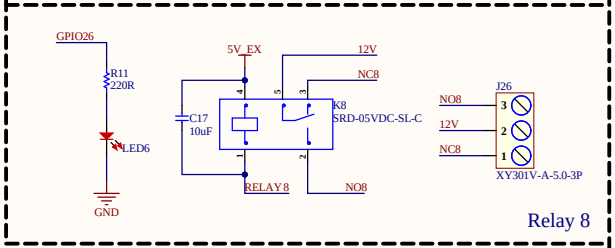


Relay 8

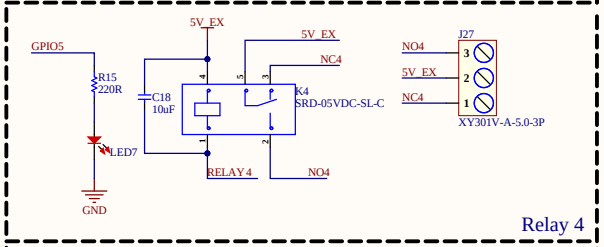


Relay 4

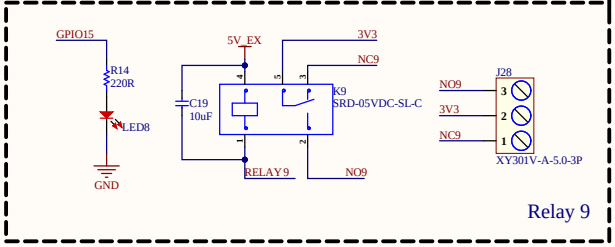



Relay 9

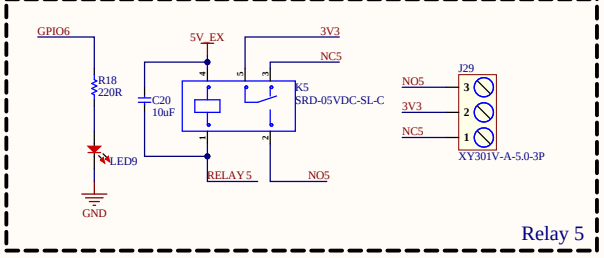

Relay 5

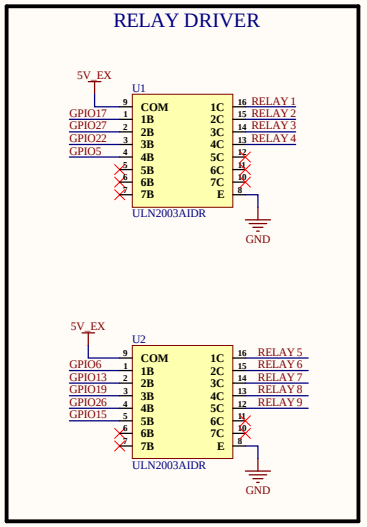





eSpark Consulting Group

Title: RelaySheet-v1.1.SchDoc	
File: EamonElkhedrawi-BoardDesign.PrjPcb	
Date: 6/3/2024	Page Num: 3
Drawn By: Huzaifa Ali	Page Total: 3