
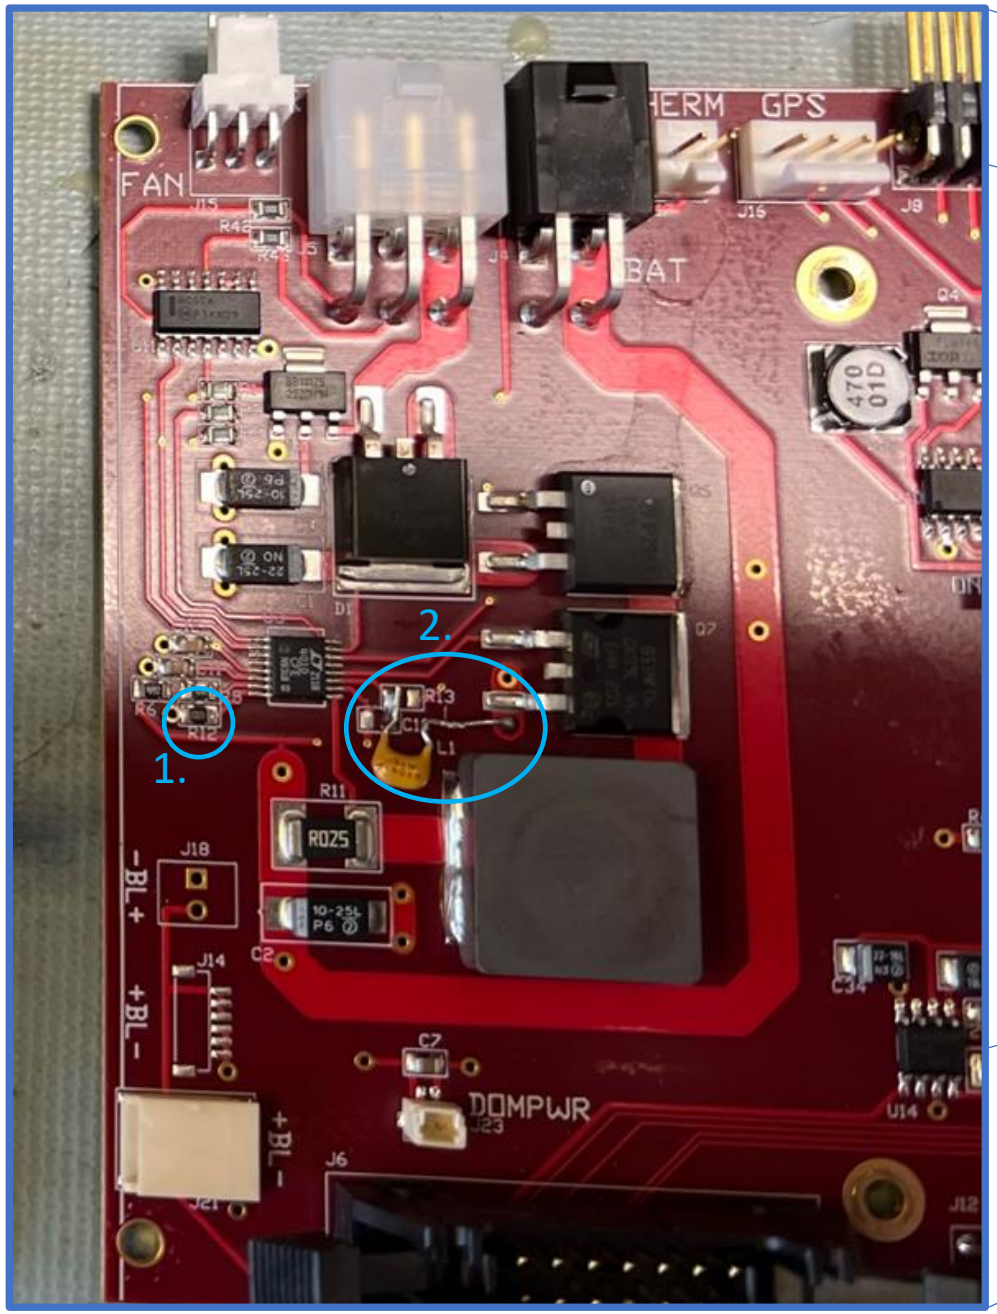


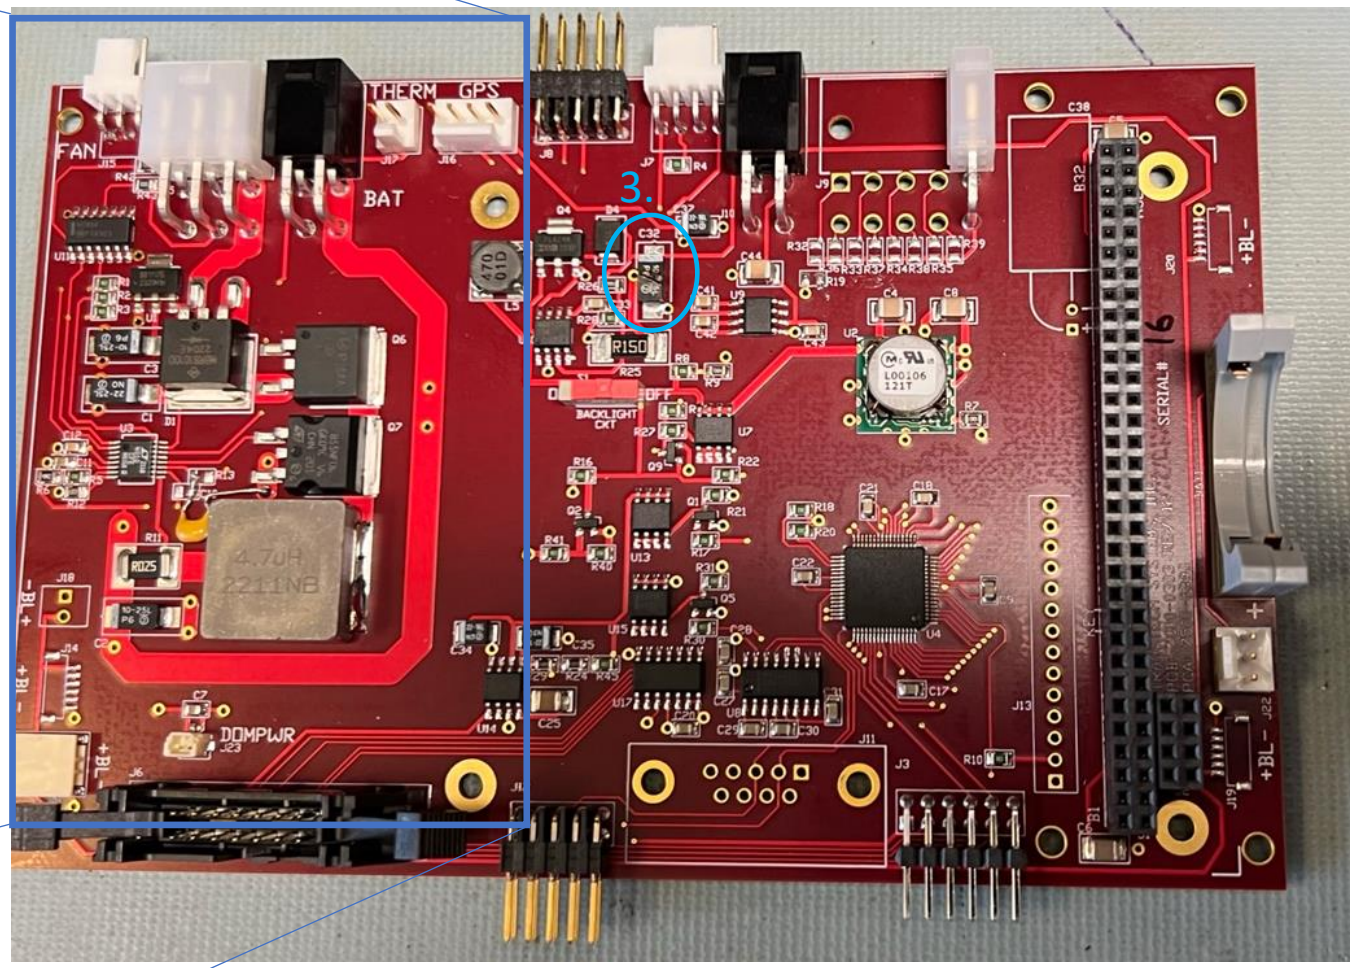

1. Remove R12
2. Remove C10 and replace with leaded component to GND
3. Replace C32 with 10uF/35V component TCJB106M035R0200