
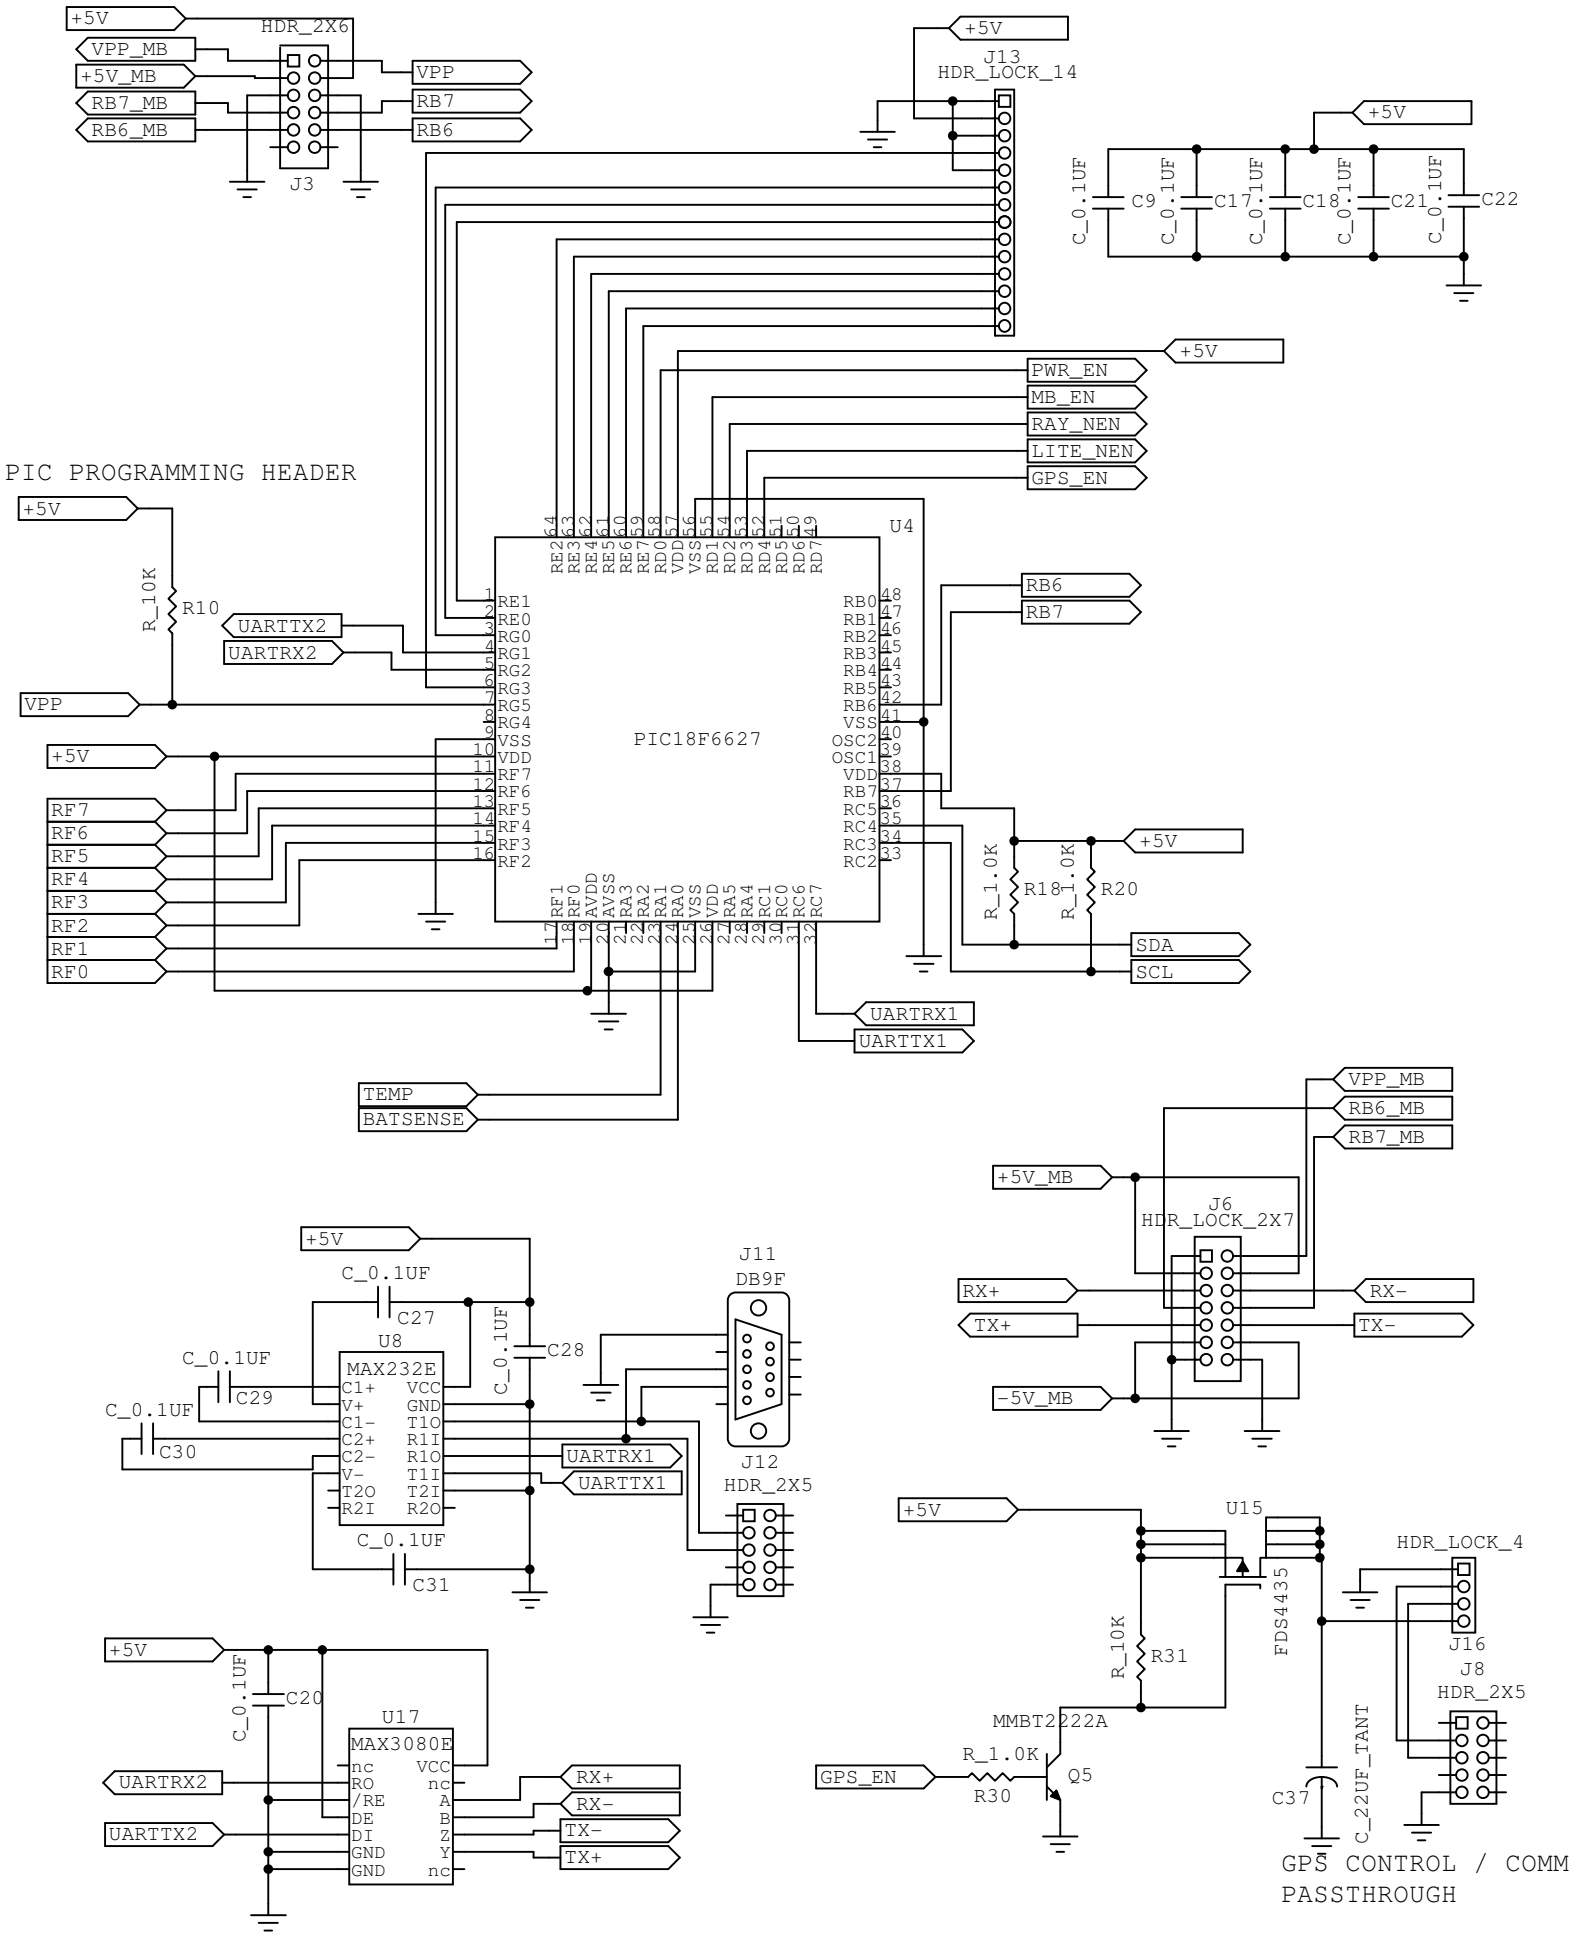


Rev	ID
R12	PC104IF UNIVERSAL
Date: 6/21/2019	Page: 1 of 5

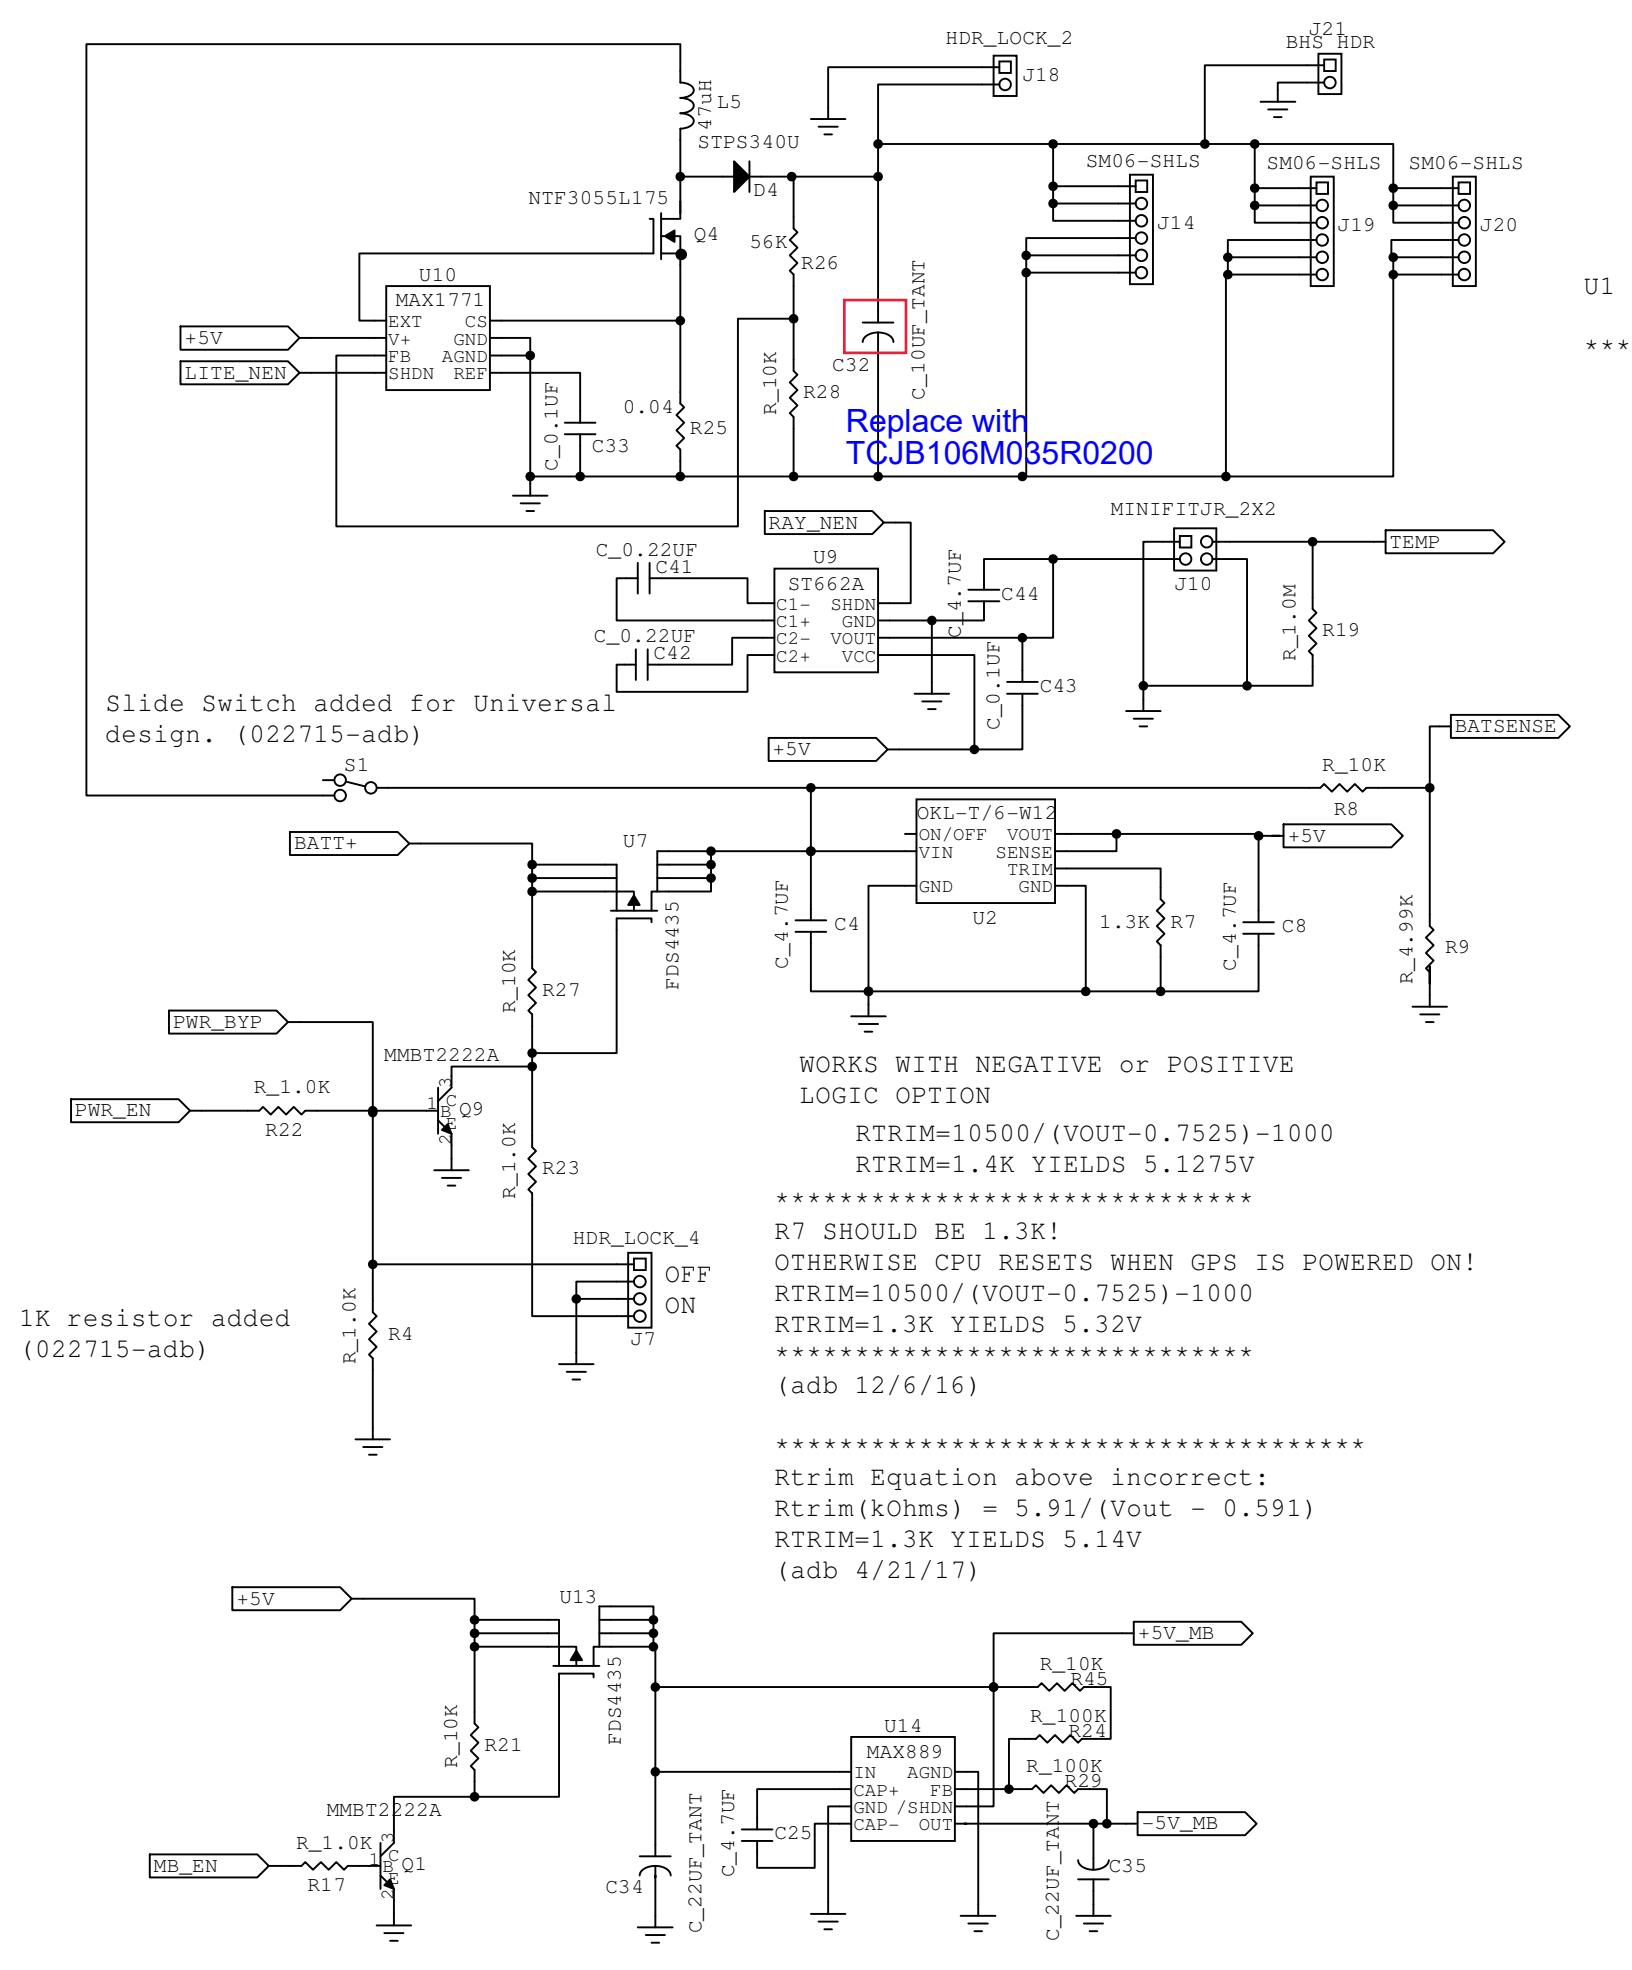


Rev	ID
R12	PC104IF UNIVERSAL
Date: 6/21/2019	Page: 2 of 5


R12 SETS MAX CHARGE TIME.
150K YIELDS MAX OF 4.3 HOURS


R5 AND R6 DETERMINE NUMBER OF
CELLS.
R5=10K/R6=50K = 6 CELLS

- Input connection moved to
  after the reverse polarity diode D1 (R11 -adb)
WRONG: Battery+ connection is then applied to U1 and
LED stays on indefinitely. Moving connection back to DCIN side (R12 6/21/19 -adb)****

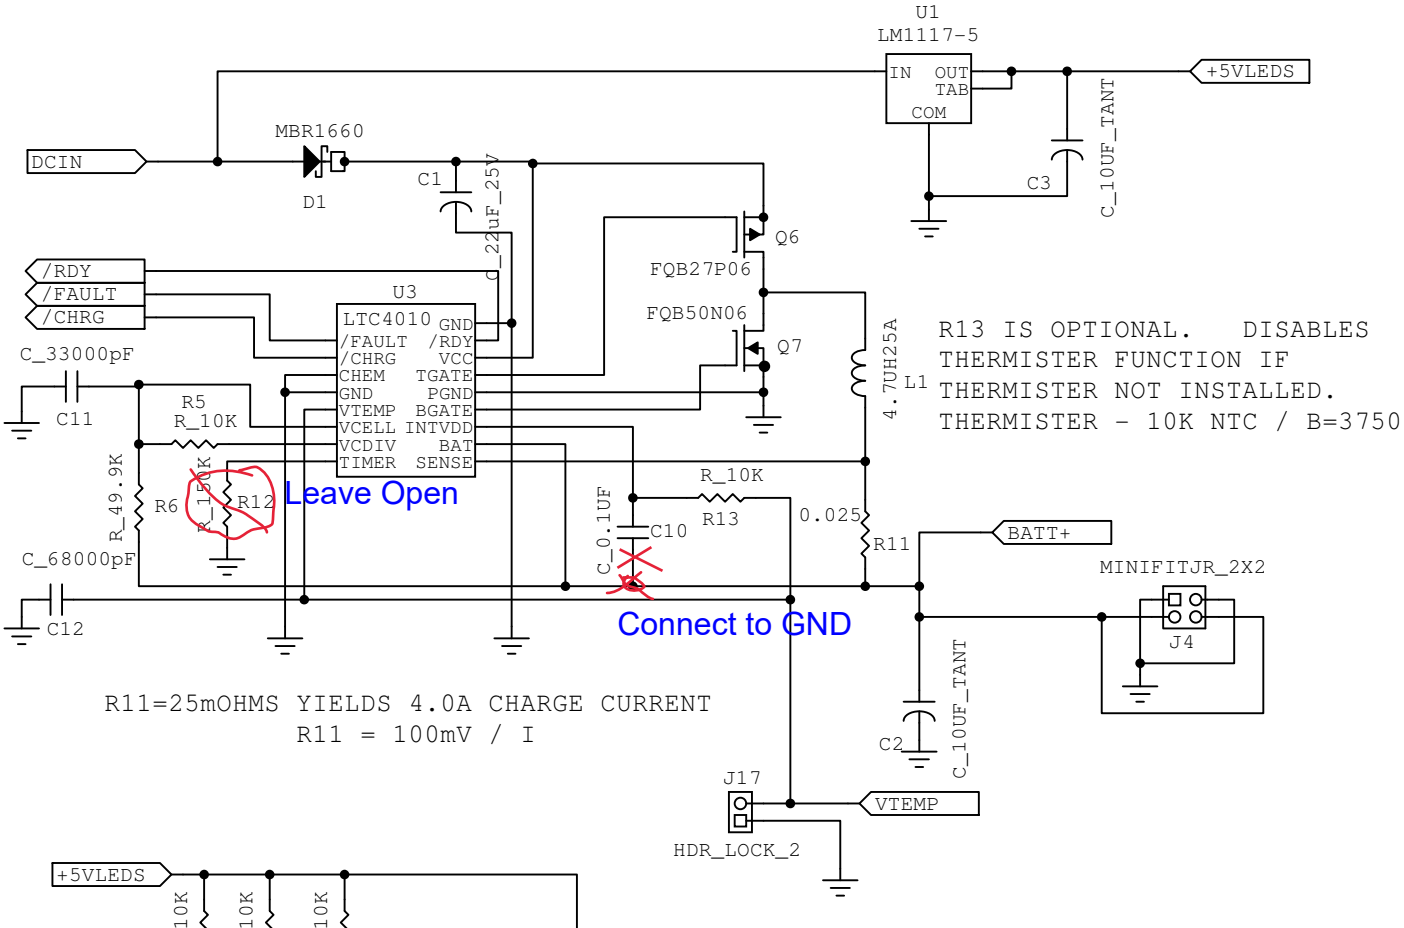


R11=25mOHMS YIELDS 4.0A CHARGE CURRENT
R11 = 100mV / I

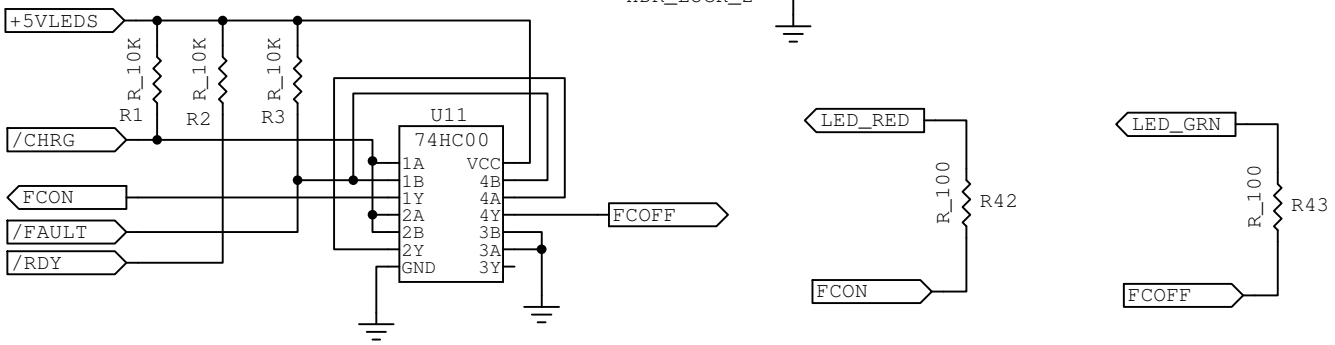

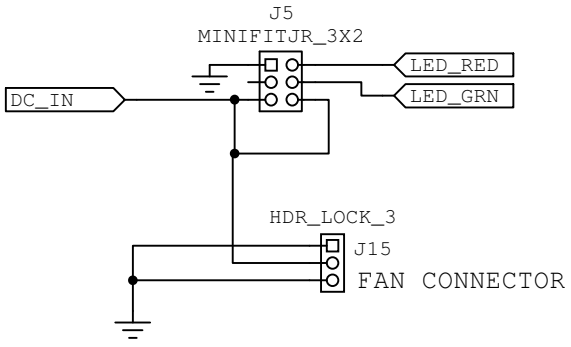

Rev	ID
R12	PC104IF UNIVERSAL
Date: 6/21/2019	Page: 3 of 5

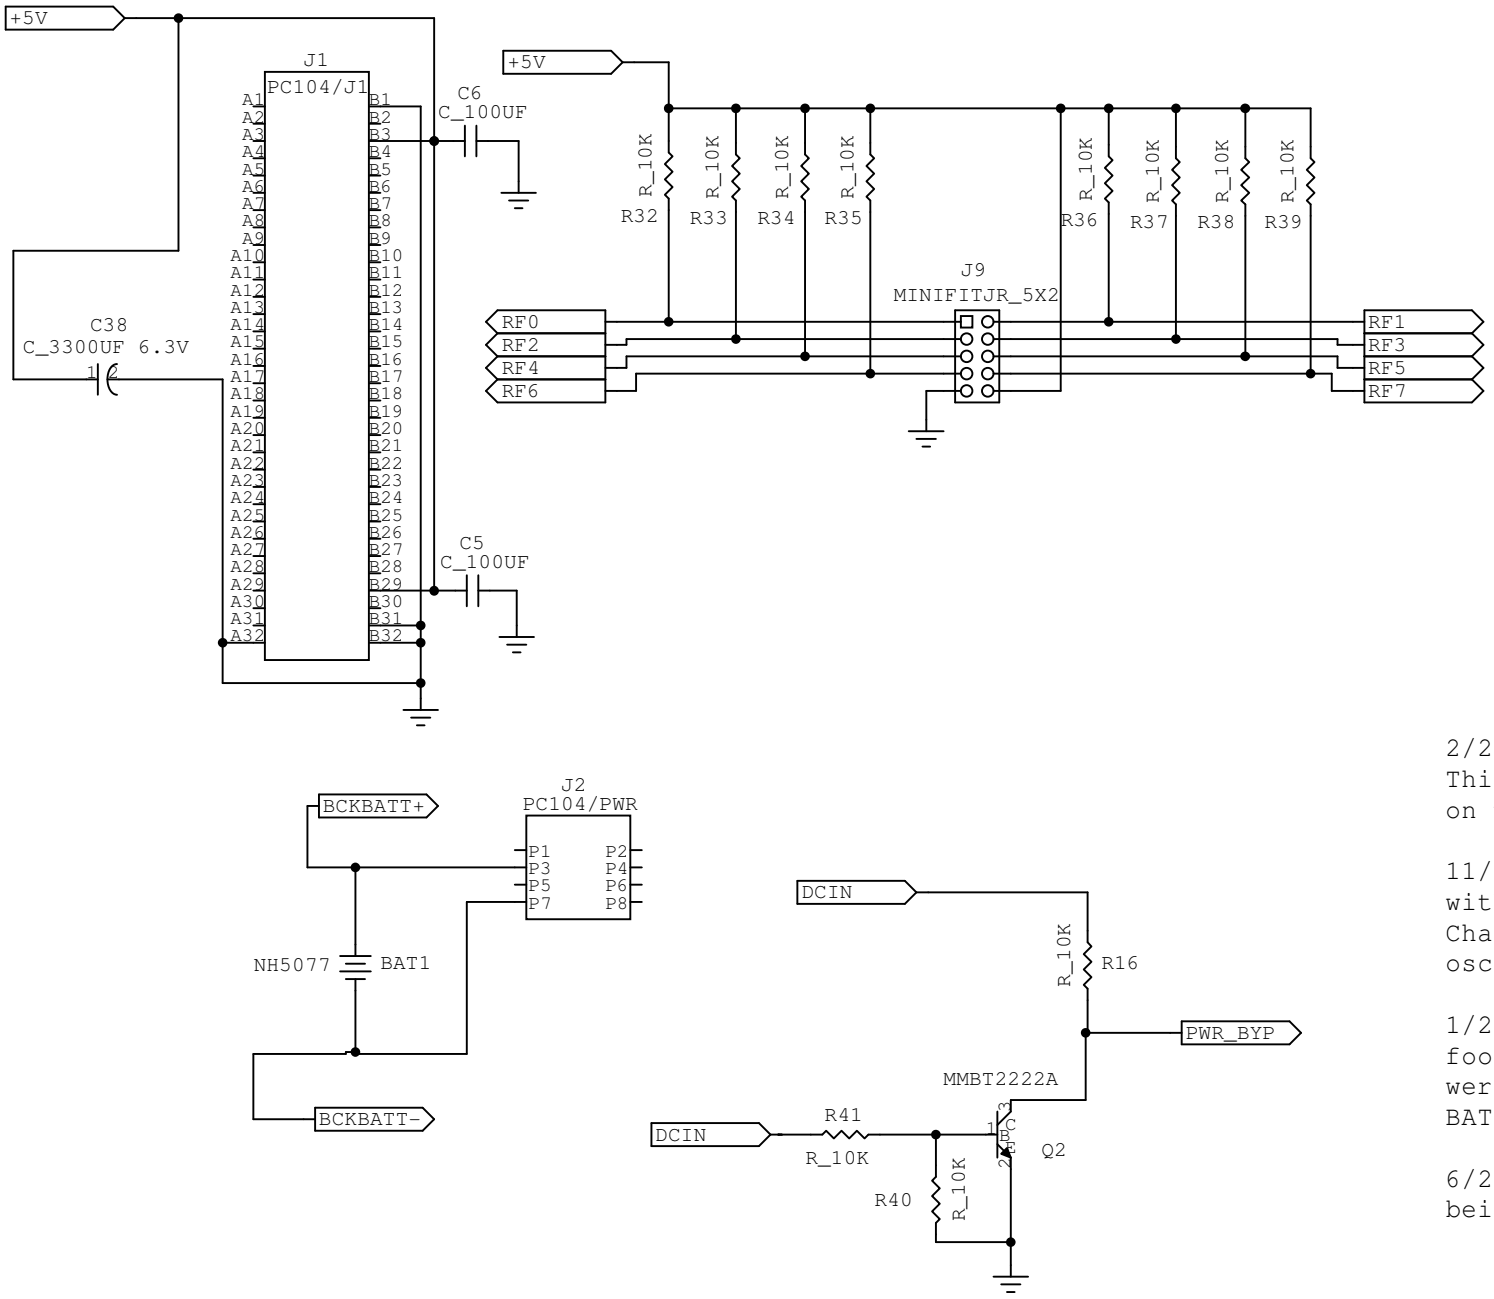

2/27/15
This was
on while


11/15/17
with seri
Change to
oscillato


1/29/18
footprint
were bein
BATT+

6/21/19
being on

Rev	ID	
R12	PC104IF UNIVERSAL	
Date: 6/21/2019		Page: 4 of 5

ADLink Related Updates:
1. CMOS battery backup connector
2. Right Angle serial comm connectors (BOM only)
3. SATADOM 5V power connector



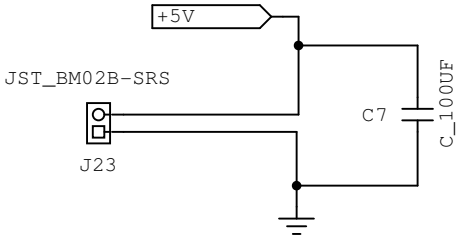

(REV 9): K1 Relay and D3 replaced with NTE2355 PNP Transistor
being done by MFG'g (Will not allow power to be turned
charging via external DC IN)

(REV 10): NTE2355 BJT thru hole component too tall and causes interference
ial cable beneath SBC.
o MMBT2222. Removed Y2, C22, and C23 as PIC being run with internal
or

(REV 11): Reverse polarity protection added to DC_IN. Q2 Component
t corrected in layout for incorrectly mirroring. Removed R14 and R15 which
ng used to preserve signal names when relay was being used. BATTA+ became

(REV 12): Reverse polarity fix applied battery+ to U1 IN resulting in LED
indefinitely. Moved connection back to DCIN side of diode D1.