



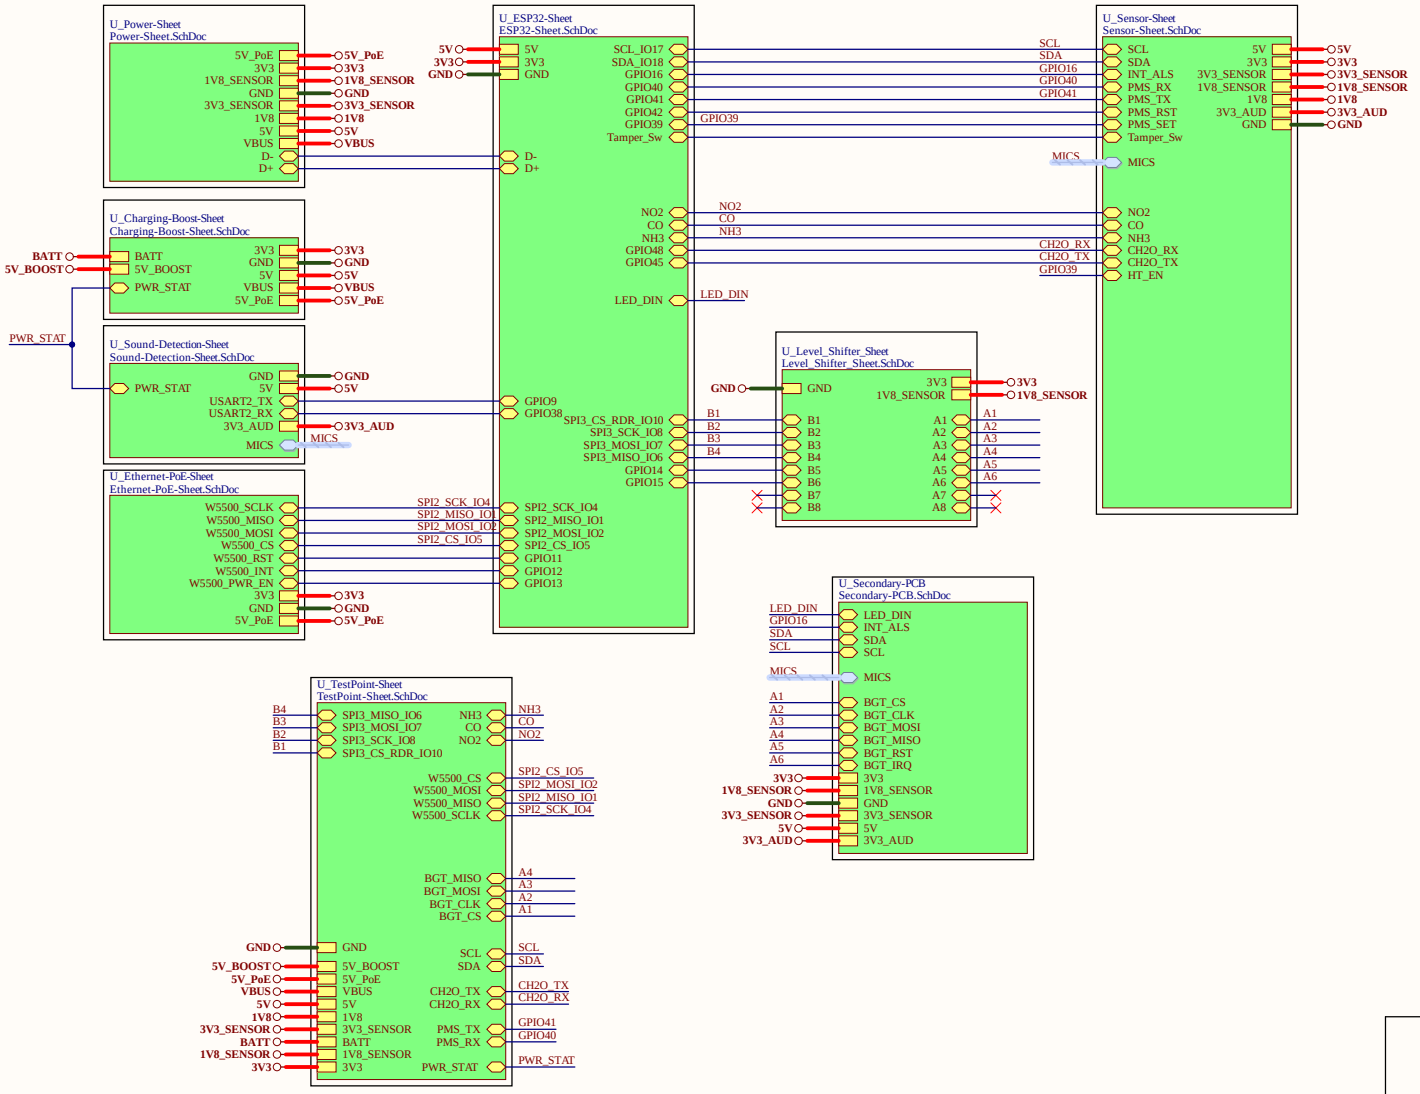



Title:	Top-Sheet.SchDoc
File:	tracker-pro-airbnb-v1.1.PrjPcb
Date: 2/23/2024	Page Num: 1
Drawn By: Huzaifa Ali	Page Total: 10

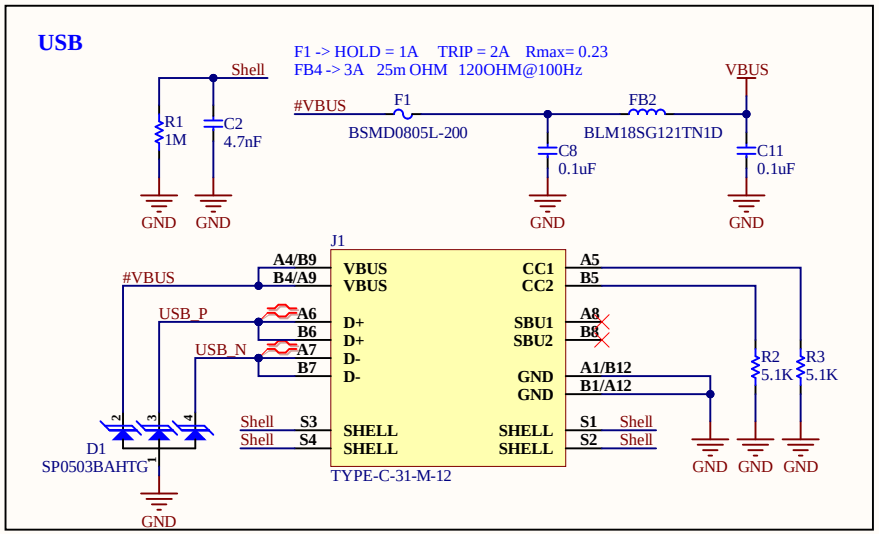

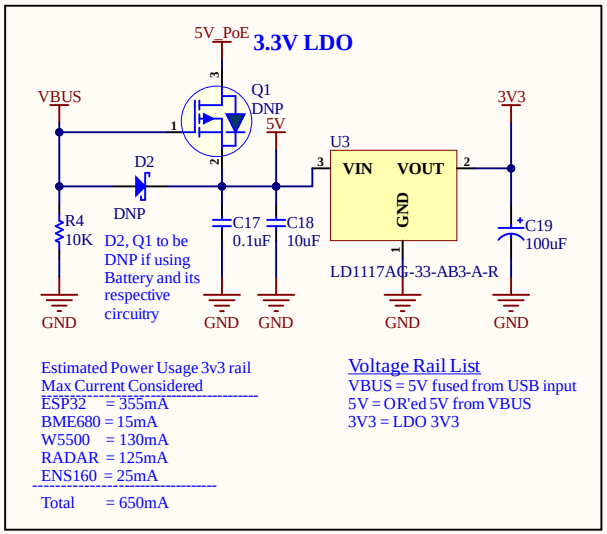

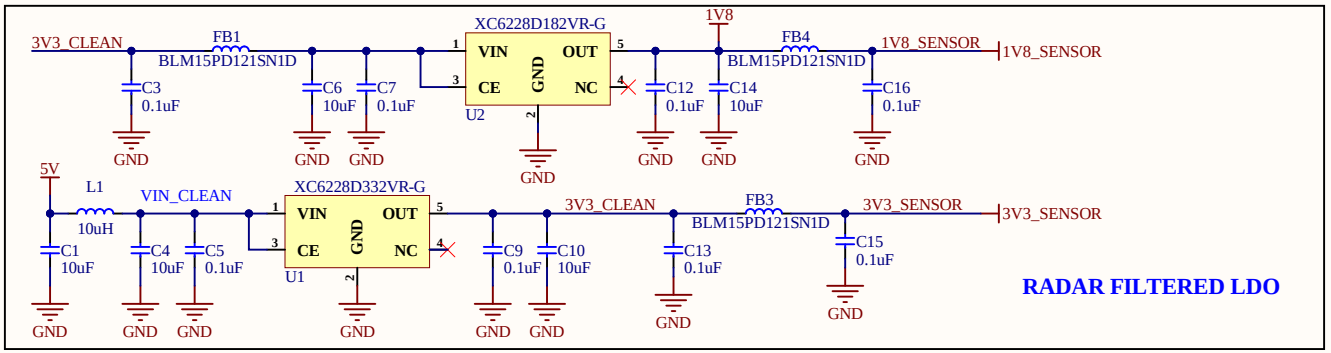








Power Section

eSpark Consulting Group

Title: Power-Sheet.SchDoc	
File: tracker-pro-airbnb-v1.1.PrjPcb	
Date: 2/23/2024	Page Num: 2
Drawn By: Huzaifa Ali	Page Total: 10

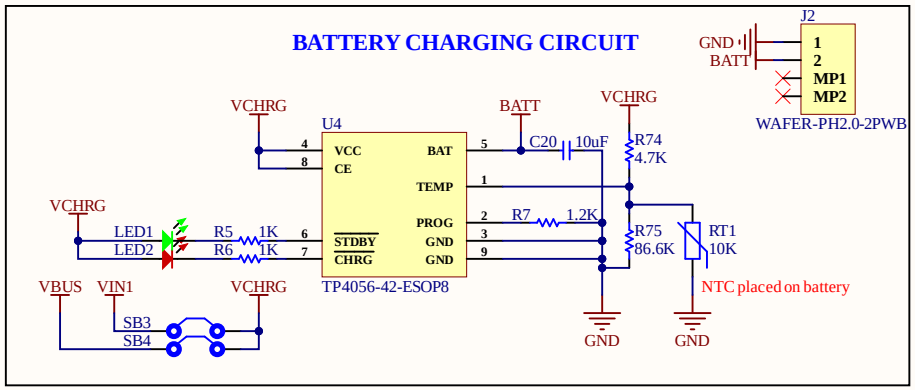

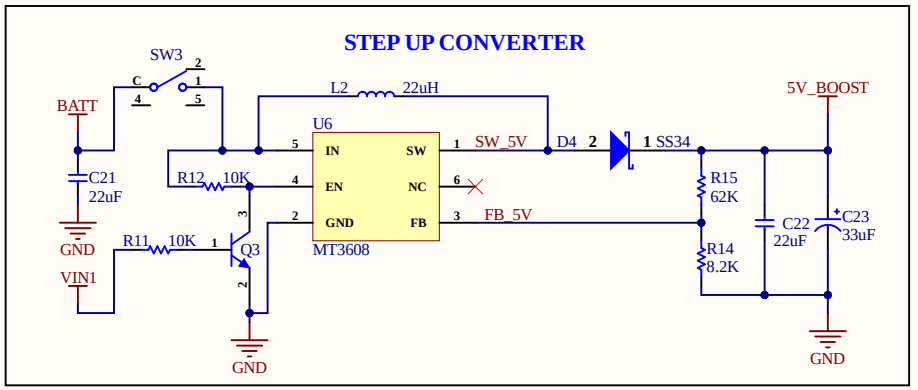

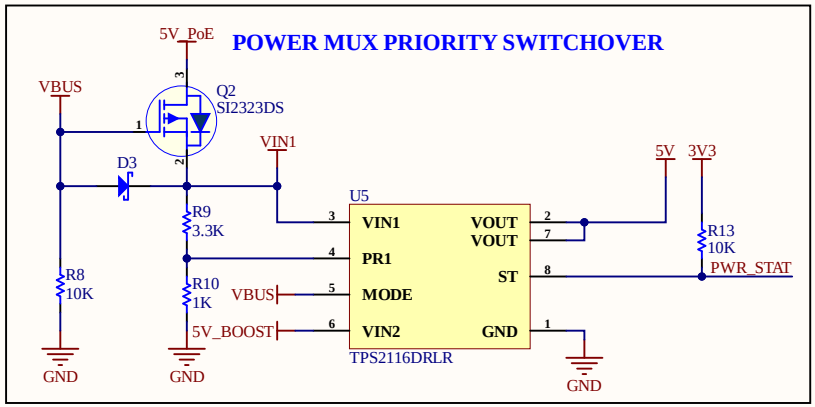







Charging Section

Title: Charging-Boost-Sheet.SchDoc	
File: tracker-pro-airbnb-v1.1.PrjPcb	
Date: 2/23/2024	Page Num: 3
Drawn By: Huzaifa Ali	Page Total: 10


TAMPER SWITCH

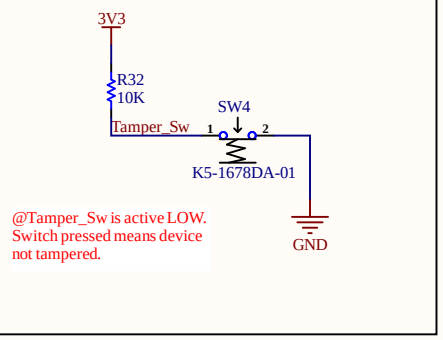


SUPPPORT SENSOR TO DETECT MARIJUANA

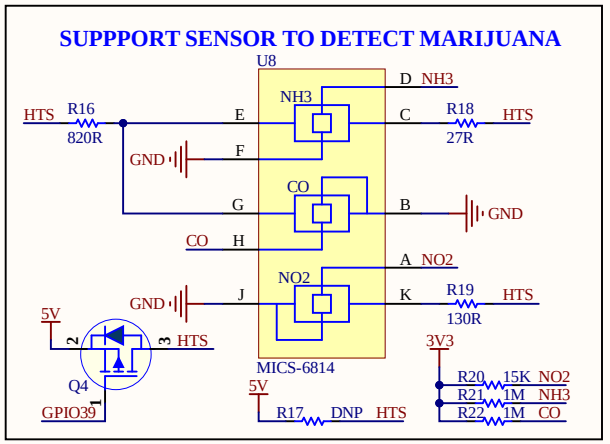


PM2.5 ENVIRONMENT SENSOR CIRCUIT

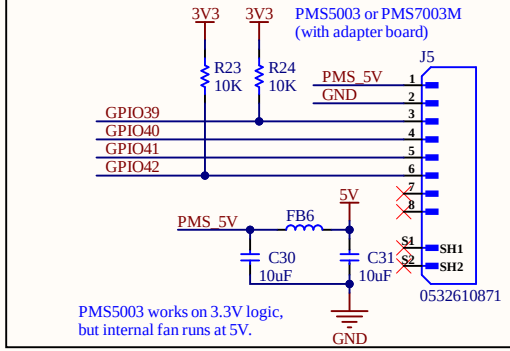


SUPPPORT SENSOR FOR MARIJUANA

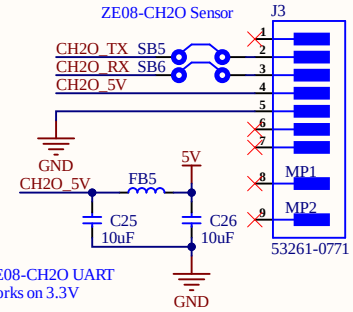


TEMP/HUMIDITY SENSOR



TEMP HUM PRESSURE SENSOR

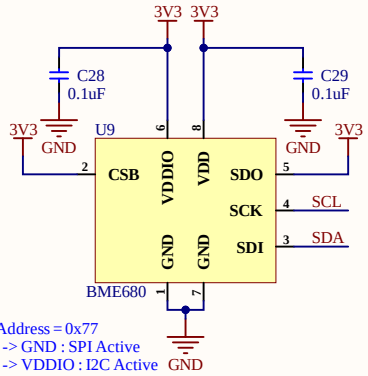

eCO2 TVOC AQI SENSOR

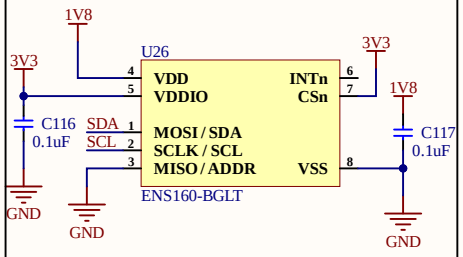

MICS
MIC_PDM12
MIC_PDM34
MIC_CLK
MICS

SDA
SCL
I2C pullups are given on Microcontroller-Sheet

Tamper_Sw
Tamper_Sw

PMS_SET
PMS_RX
PMS_TX
PMS_RST
INT_ALS
GPIO39
GPIO40
GPIO41
GPIO42
GPIO16

NO2
CO
NH3
HT_EN
CH2O_RX
CH2O_TX
NO2
CO
NH3
GPIO39
CH2O_RX
CH2O_TX


5V
3V3_AUD
3V3
1V8
3V3_SENSOR
1V8_SENSOR
GND
5V
3V3_AUD
3V3
1V8
3V3_SENSOR
1V8_SENSOR
GND

Sensors Section


eSpark Consulting Group


Title: Sensor-Sheet.SchDoc	
File: tracker-pro-airbnb-v1.1.PrjPcb	
Date: 2/23/2024	Page Num: 4
Drawn By: Huzaifa Ali	Page Total: 10


LEVEL SHIFTER

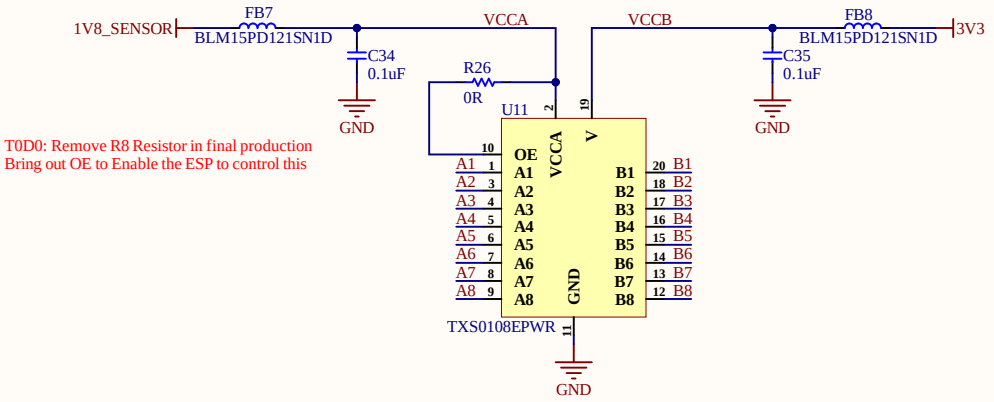

1.4V to 3.6V on A-PORT and 1.65V to 5.5V on B-PORT(VCCA < VCCB)









Level Shifter Section

eSpark Consulting Group

Title: Level_Shifter_Sheet.SchDoc	
File: tracker-pro-airbnb-v1.1.PrjPcb	
Date: 2/23/2024	Page Num: 5
Drawn By: Huzaifa Ali	Page Total: 10


LDO 3.3V



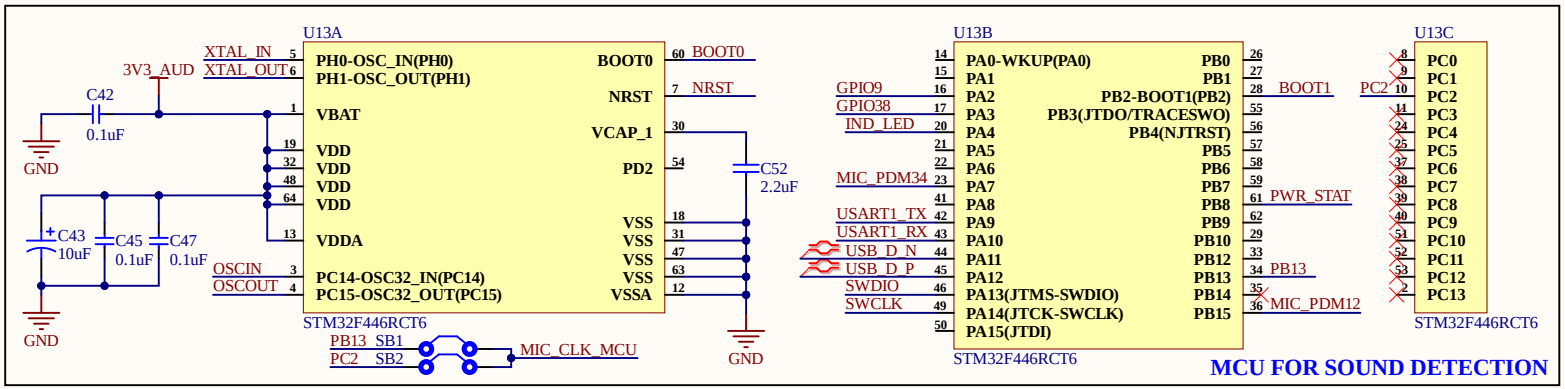


MCU FOR SOUND DETECTION


MCU SUPPORTING CIRCUIT

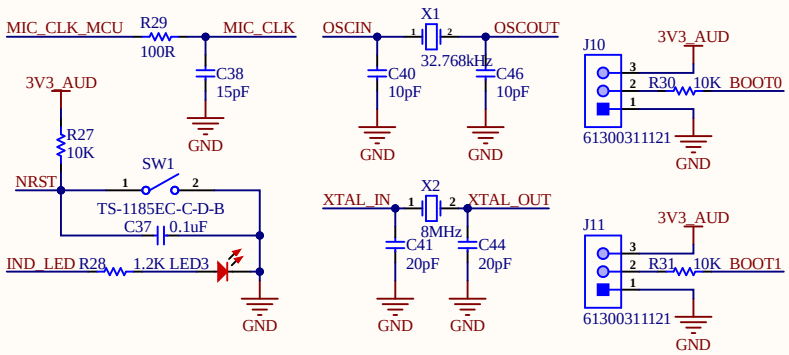

MCU SUPPORTING CIRCUIT

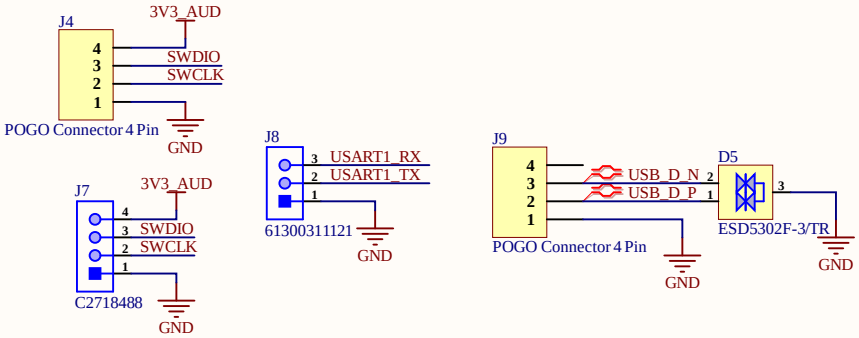








Sound Detection


eSpark Consulting Group

Title: Sound-Detection-Sheet.SchDoc	
File: tracker-pro-airbnb-v1.1.PrjPcb	
Date: 2/23/2024	Page Num: 6
Drawn By: Huzaifa Ali	Page Total: 10


ESP32 S3-R8 MCU

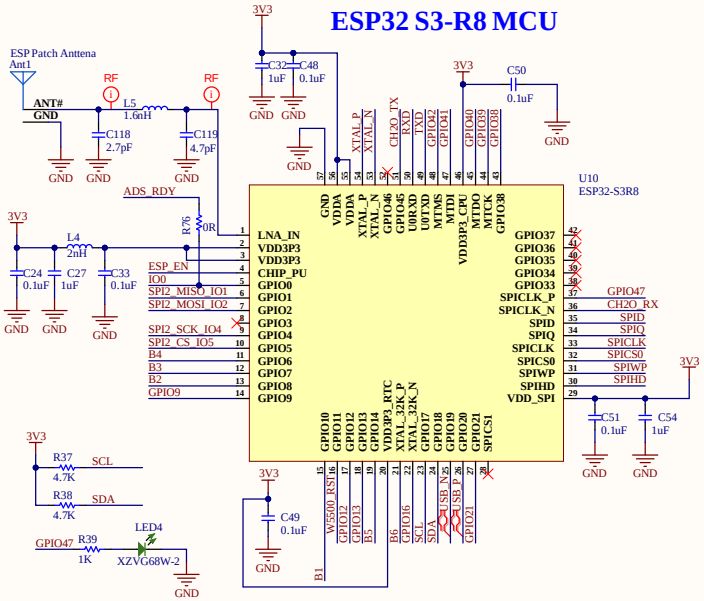



IO EXPANDER




16MB FLASH











RGB LEDs LEVEL SHIFTER




12-BIT ADC FOR MICS-6814 SUPPORT





Strapping pins:
* BOOT = IO0
* JTAG = IO3
* VSPI = IO45
* LOG = IO46


Octal SPI pins (not available for external use)
* SPIIO = IO26 - IO34 (Not exposed in module
* SPID = IO35 (Octal PSRAM)
* SPICLK = IO36 (Octal PSRAM)
* SPIQ = IO37 (Octal PSRAM)


USB-JTAG: GPIO 19 and 20 are used by USB-JTAG. In order to use them as GPIOs, USB has to be disabled at driver level















Controller Section

Title: ESP32-Sheet.SchDoc	
File: tracker-pro-airbnb-v1.1.PrjPcb	
Date: 2/23/2024	Page Num: 7
Drawn By: Huzaifa Ali	Page Total: 10


Ethernet Section

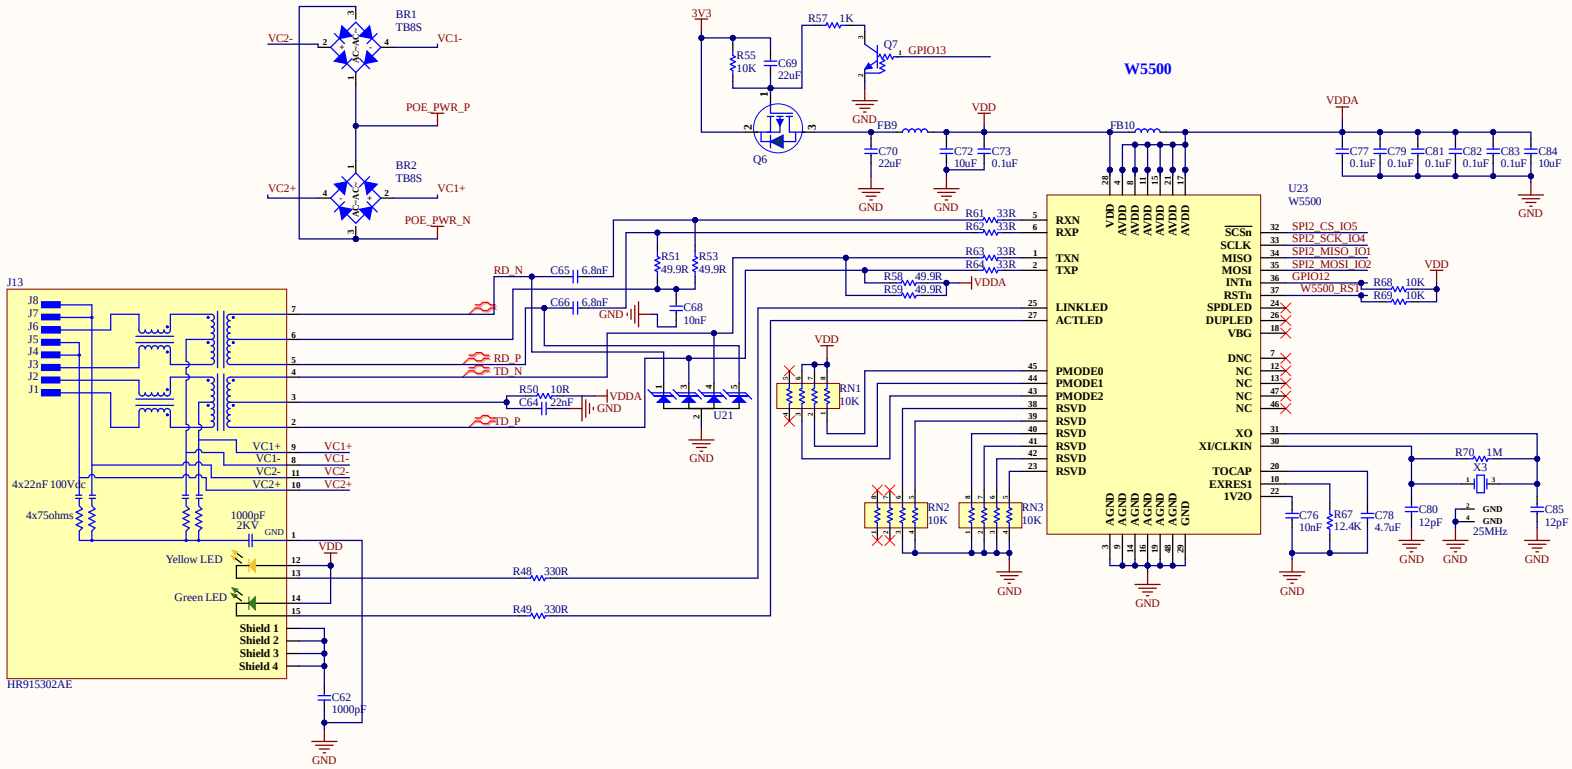



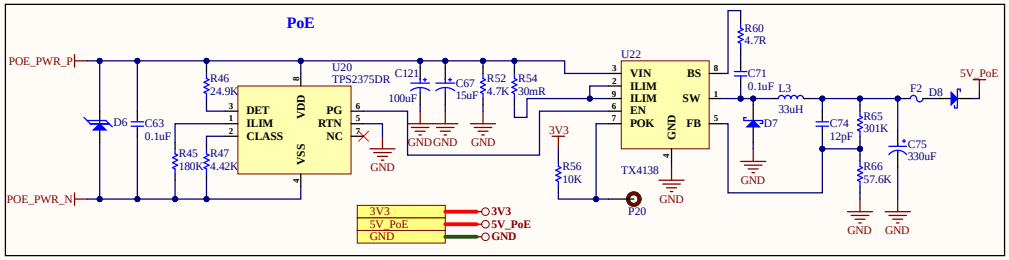



Title: Ethernet-PoE-Sheet.SchDoc	
File: tracker-pro-airbnb-v1.1.PrjPcb	
Date: 2/23/2024	Page Num: 8
Drawn By: Huzaifa Ali	Page Total: 10

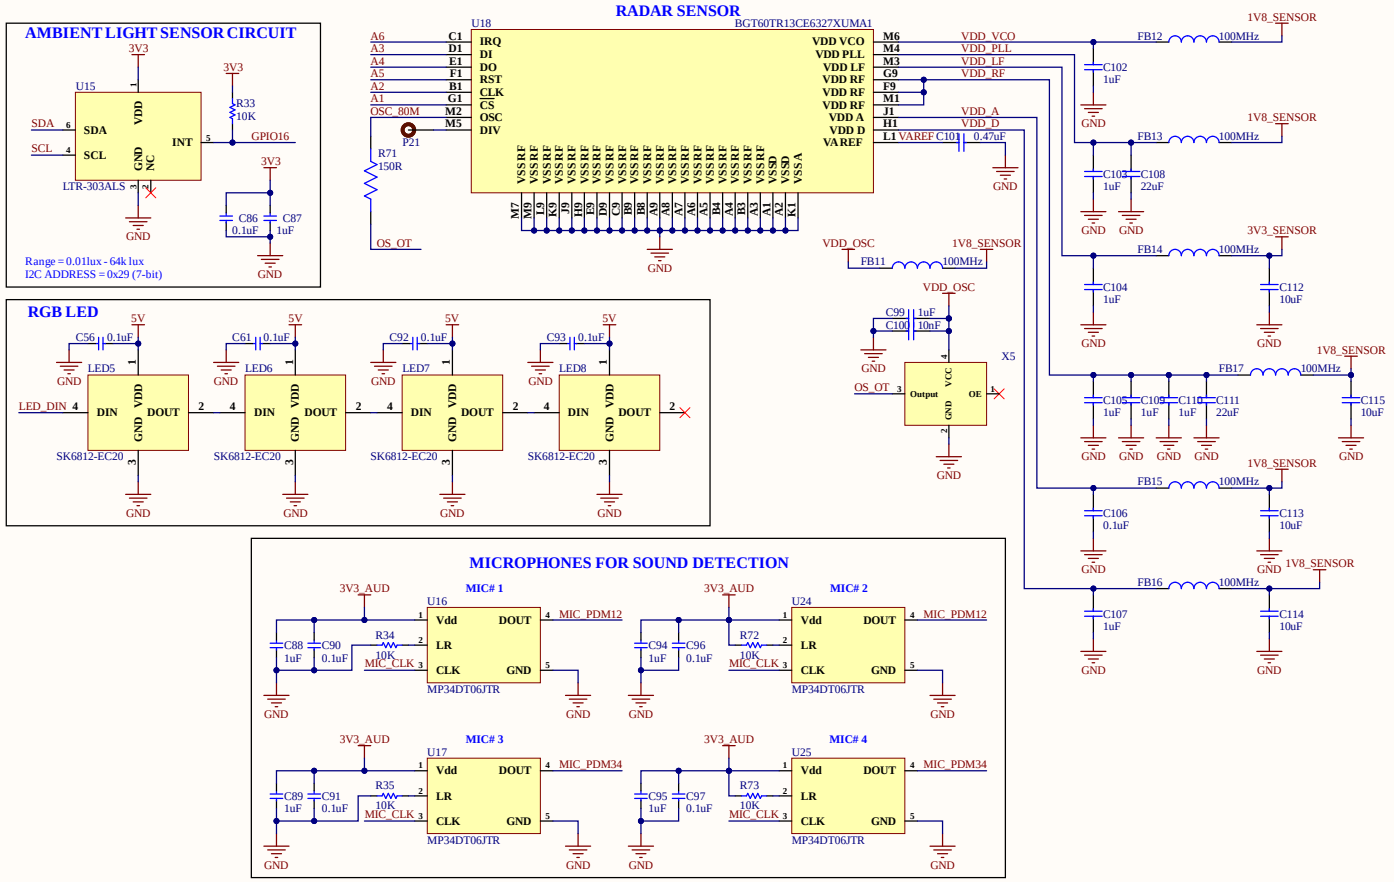

Title:	Secondary-PCB.SchDoc
File:	tracker-pro-airbnb-v1.1.PrjPcb
Date: 4/25/2024	Page Num: 9
Drawn By: Huzaifa Ali	Page Total: 10

eSpark Consulting Group

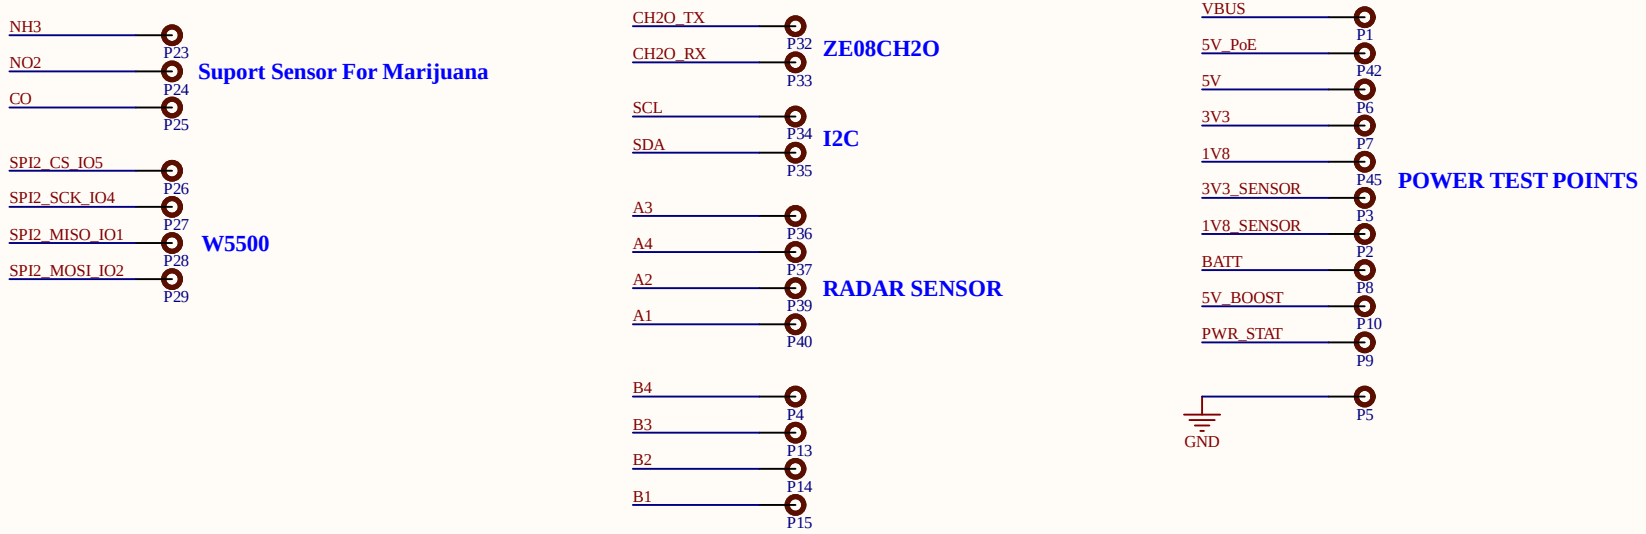

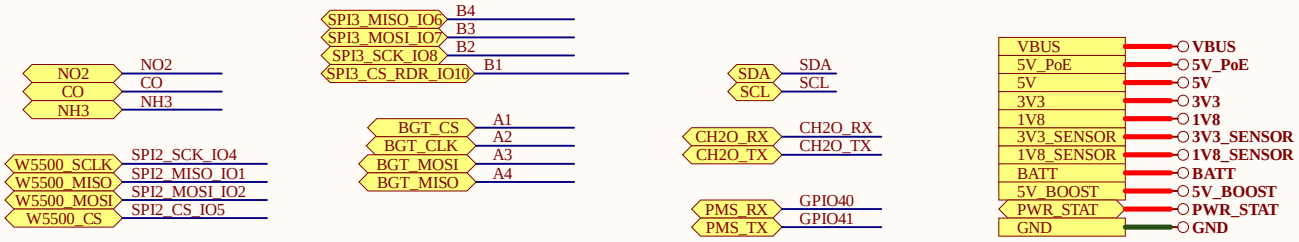

eSpark Consulting Group

Title: TestPoint-Sheet.SchDoc	
File: tracker-pro-airbnb-v1.1.PrjPcb	
Date: 2/23/2024	Page Num: 10
Drawn By: Huzaifa Ali	Page Total: 10