Main Technical data:

Display Content:18 digit+46 DOS prompt

Operating voltage:3.3V

Working current:<1mA

Character height:6.0mm,19.3mm,10.2mm

Viewing angle:12：00

Display way:Transflective positive(FSTN)

Interface way:I²C

LCD Working temp:-40～+80℃

LCD Storage temp:-45～+85℃

Backlight color:ICE bl（波长 475～485nm）

Backlight current:<150mA

Environment relative humidity:<85%


Backlight working temp:-20～+70℃

Backlight storage temp:-30～+80℃

Interface signal Instruction:


1	BLA:Backlight cathode	2	BLK:Backlight negative electrode
3	VDD:Power supply cathode	4	SDA:I²C data input/output
5	SCL:I²C timing input/output	6	VSS:Power Ground
7	Y4:矩阵按键	8	Y3:矩阵按键
9	Y2:矩阵按键	10	X1:矩阵按键
11	X5:矩阵按键		

LCD Module dimension:

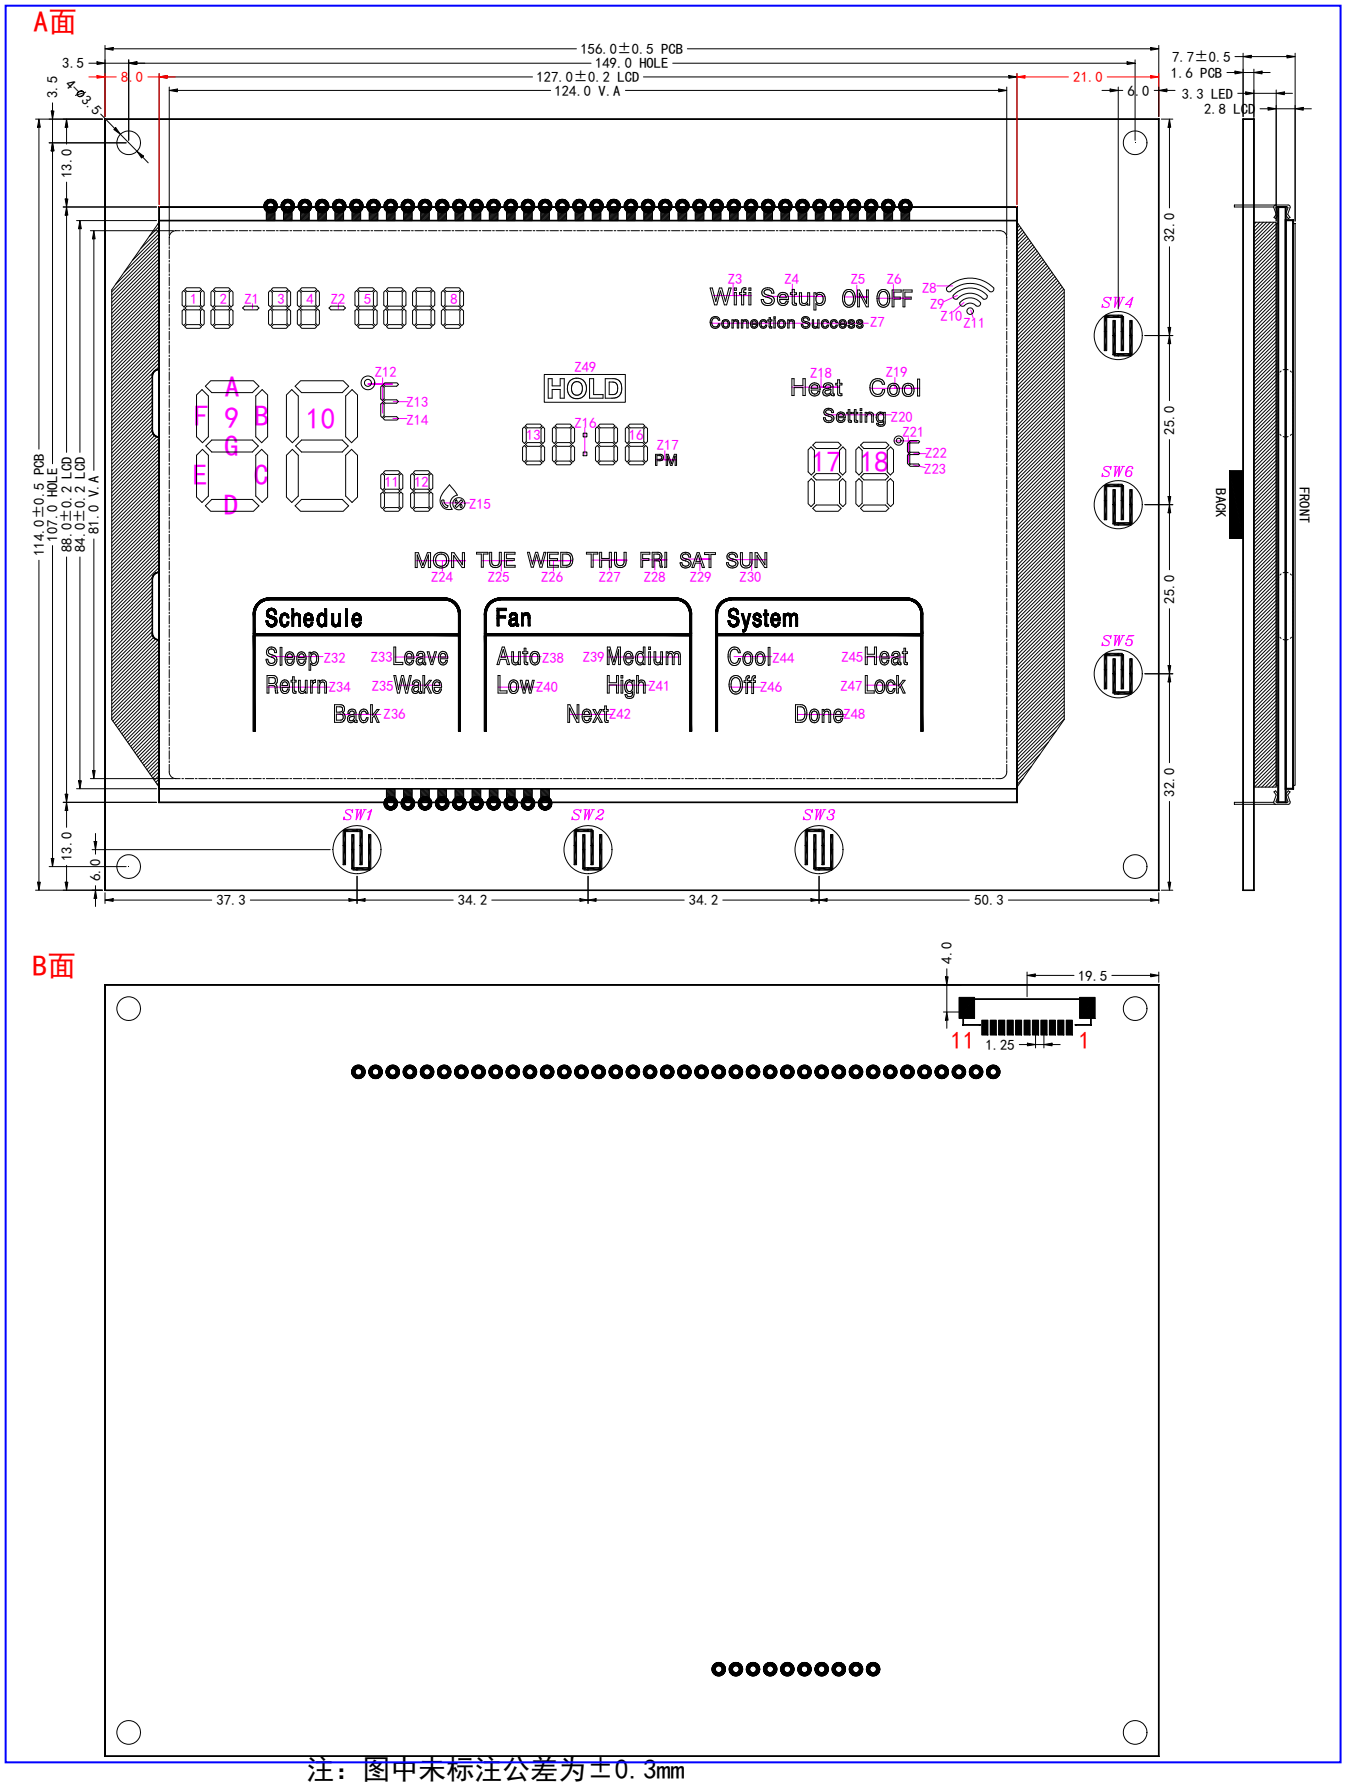


注：图中未标注公差为±0.3mm


Silk-printing:

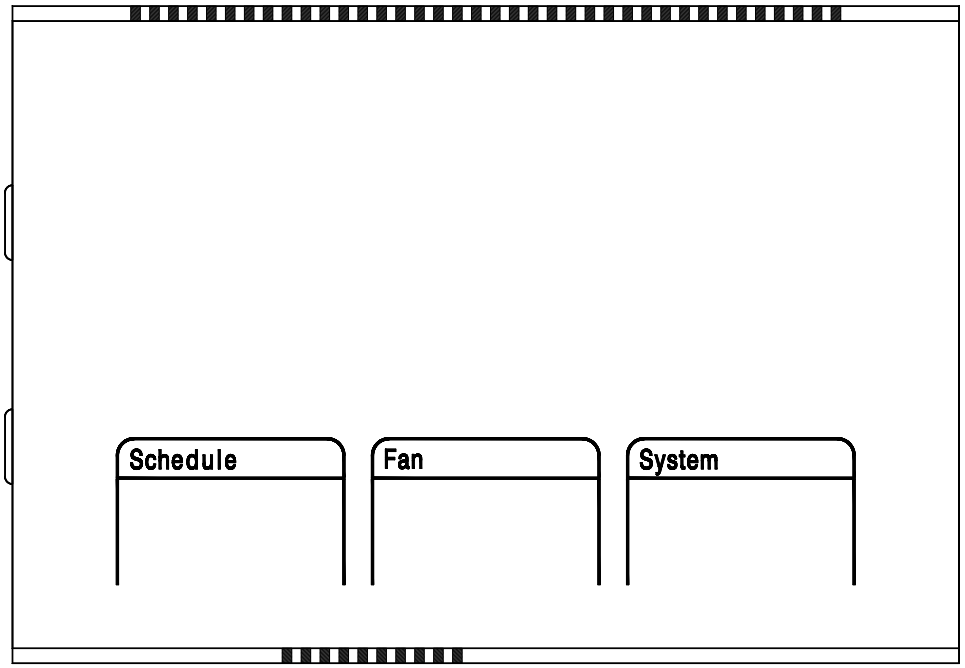


Full Display Content:

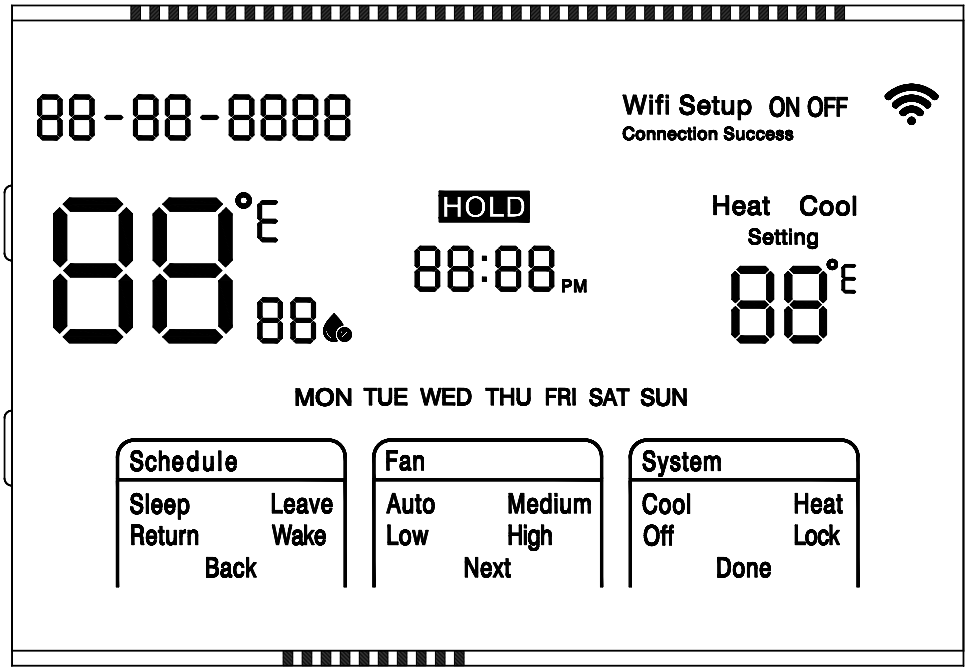

Key dimension:

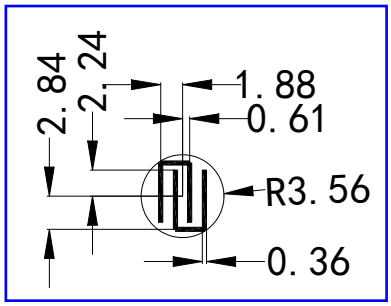

Drawing:

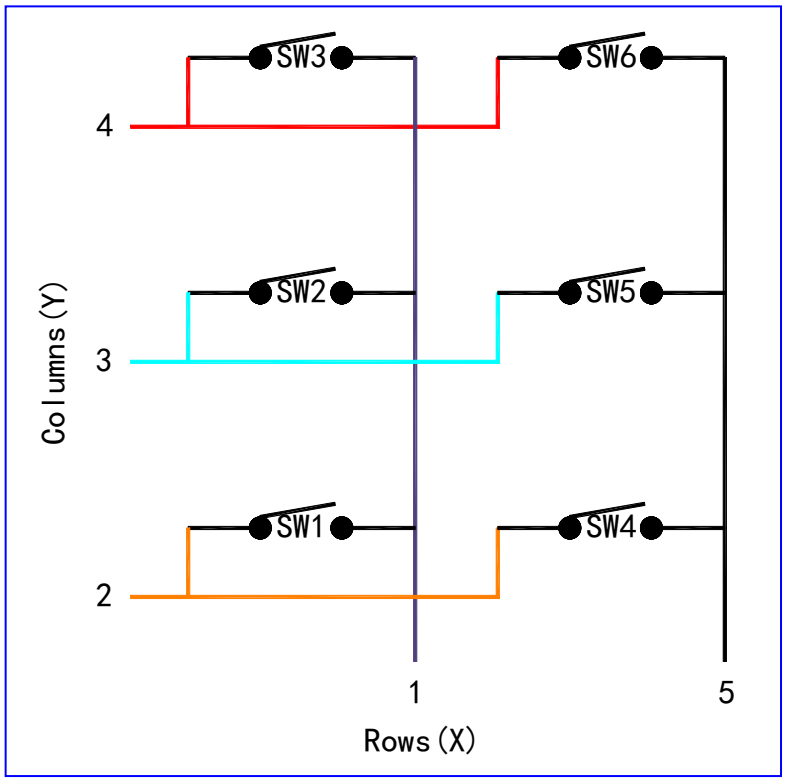

Address Mapping List: (待定)

LCDBUF	D7	D6	D5	D4	D3	D2	D1	D0
0								
1								
2								
3								
4								
5								
6								
7								
8								
9								
...								