SCH (PCBA) Part Number: DT10965


SCHEMATIC MAJOR REVISION HISTORY


REVISION	SUBREVISION	CHANGE DESCRIPTION	YYYY/MM/DD
V1	00	Initial version	7.07.2025

PCB Part Number: DT10966


PCB MAJOR REVISION HISTORY

REVISION	SUBREVISION	CHANGE DESCRIPTION	YYYY/MM/DD
V1	00	Initial version	dd.mm.2025

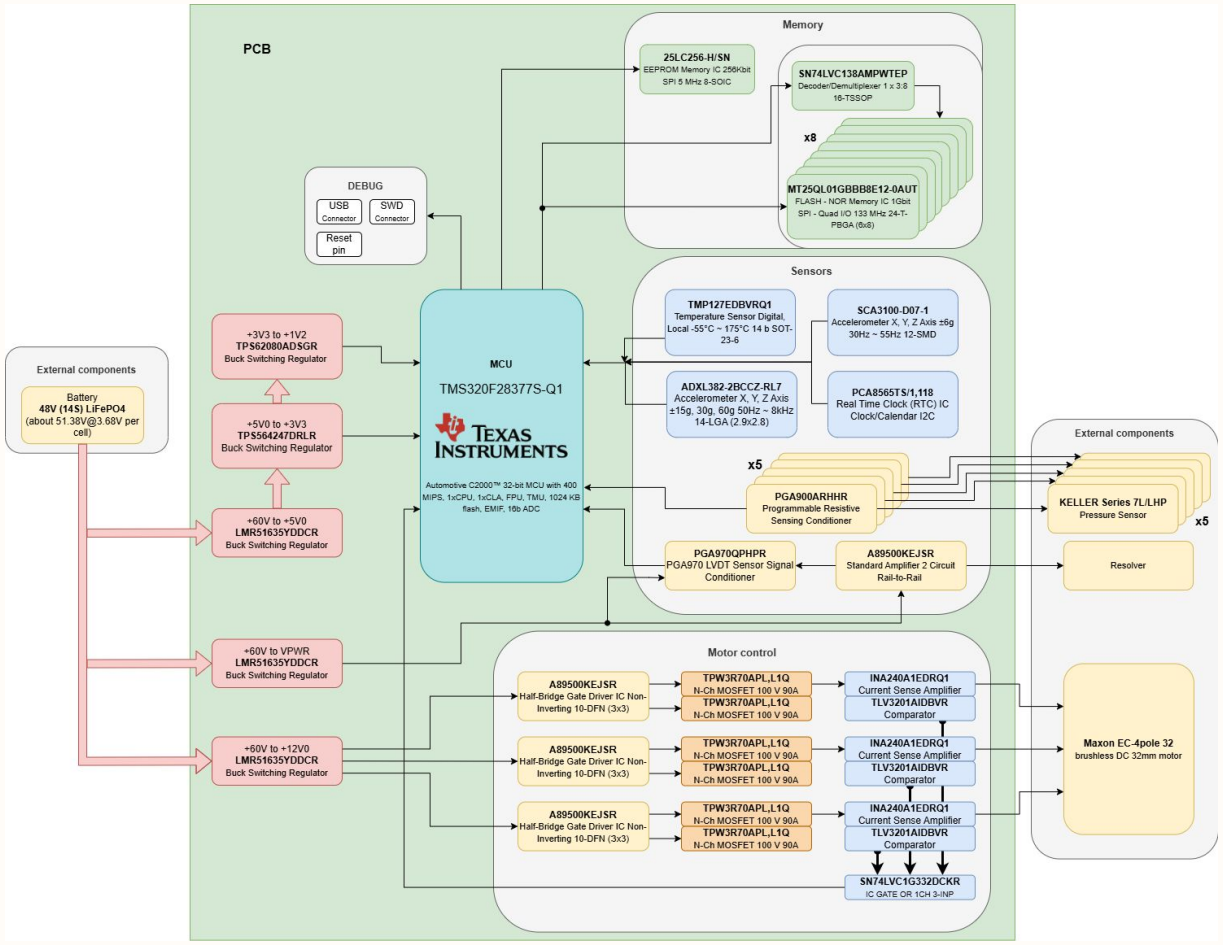


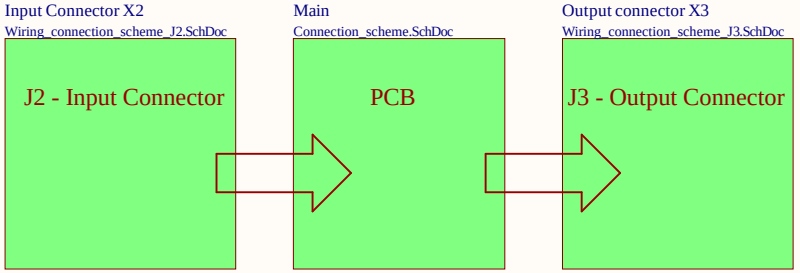



Title	MOTORCONTROLLER		Droid Technologies
Size: A4	Number: DT10965	Revision: 1.0	
Date: 14.07.2025	Time: 12:30:25	Sheet 1 of 22	

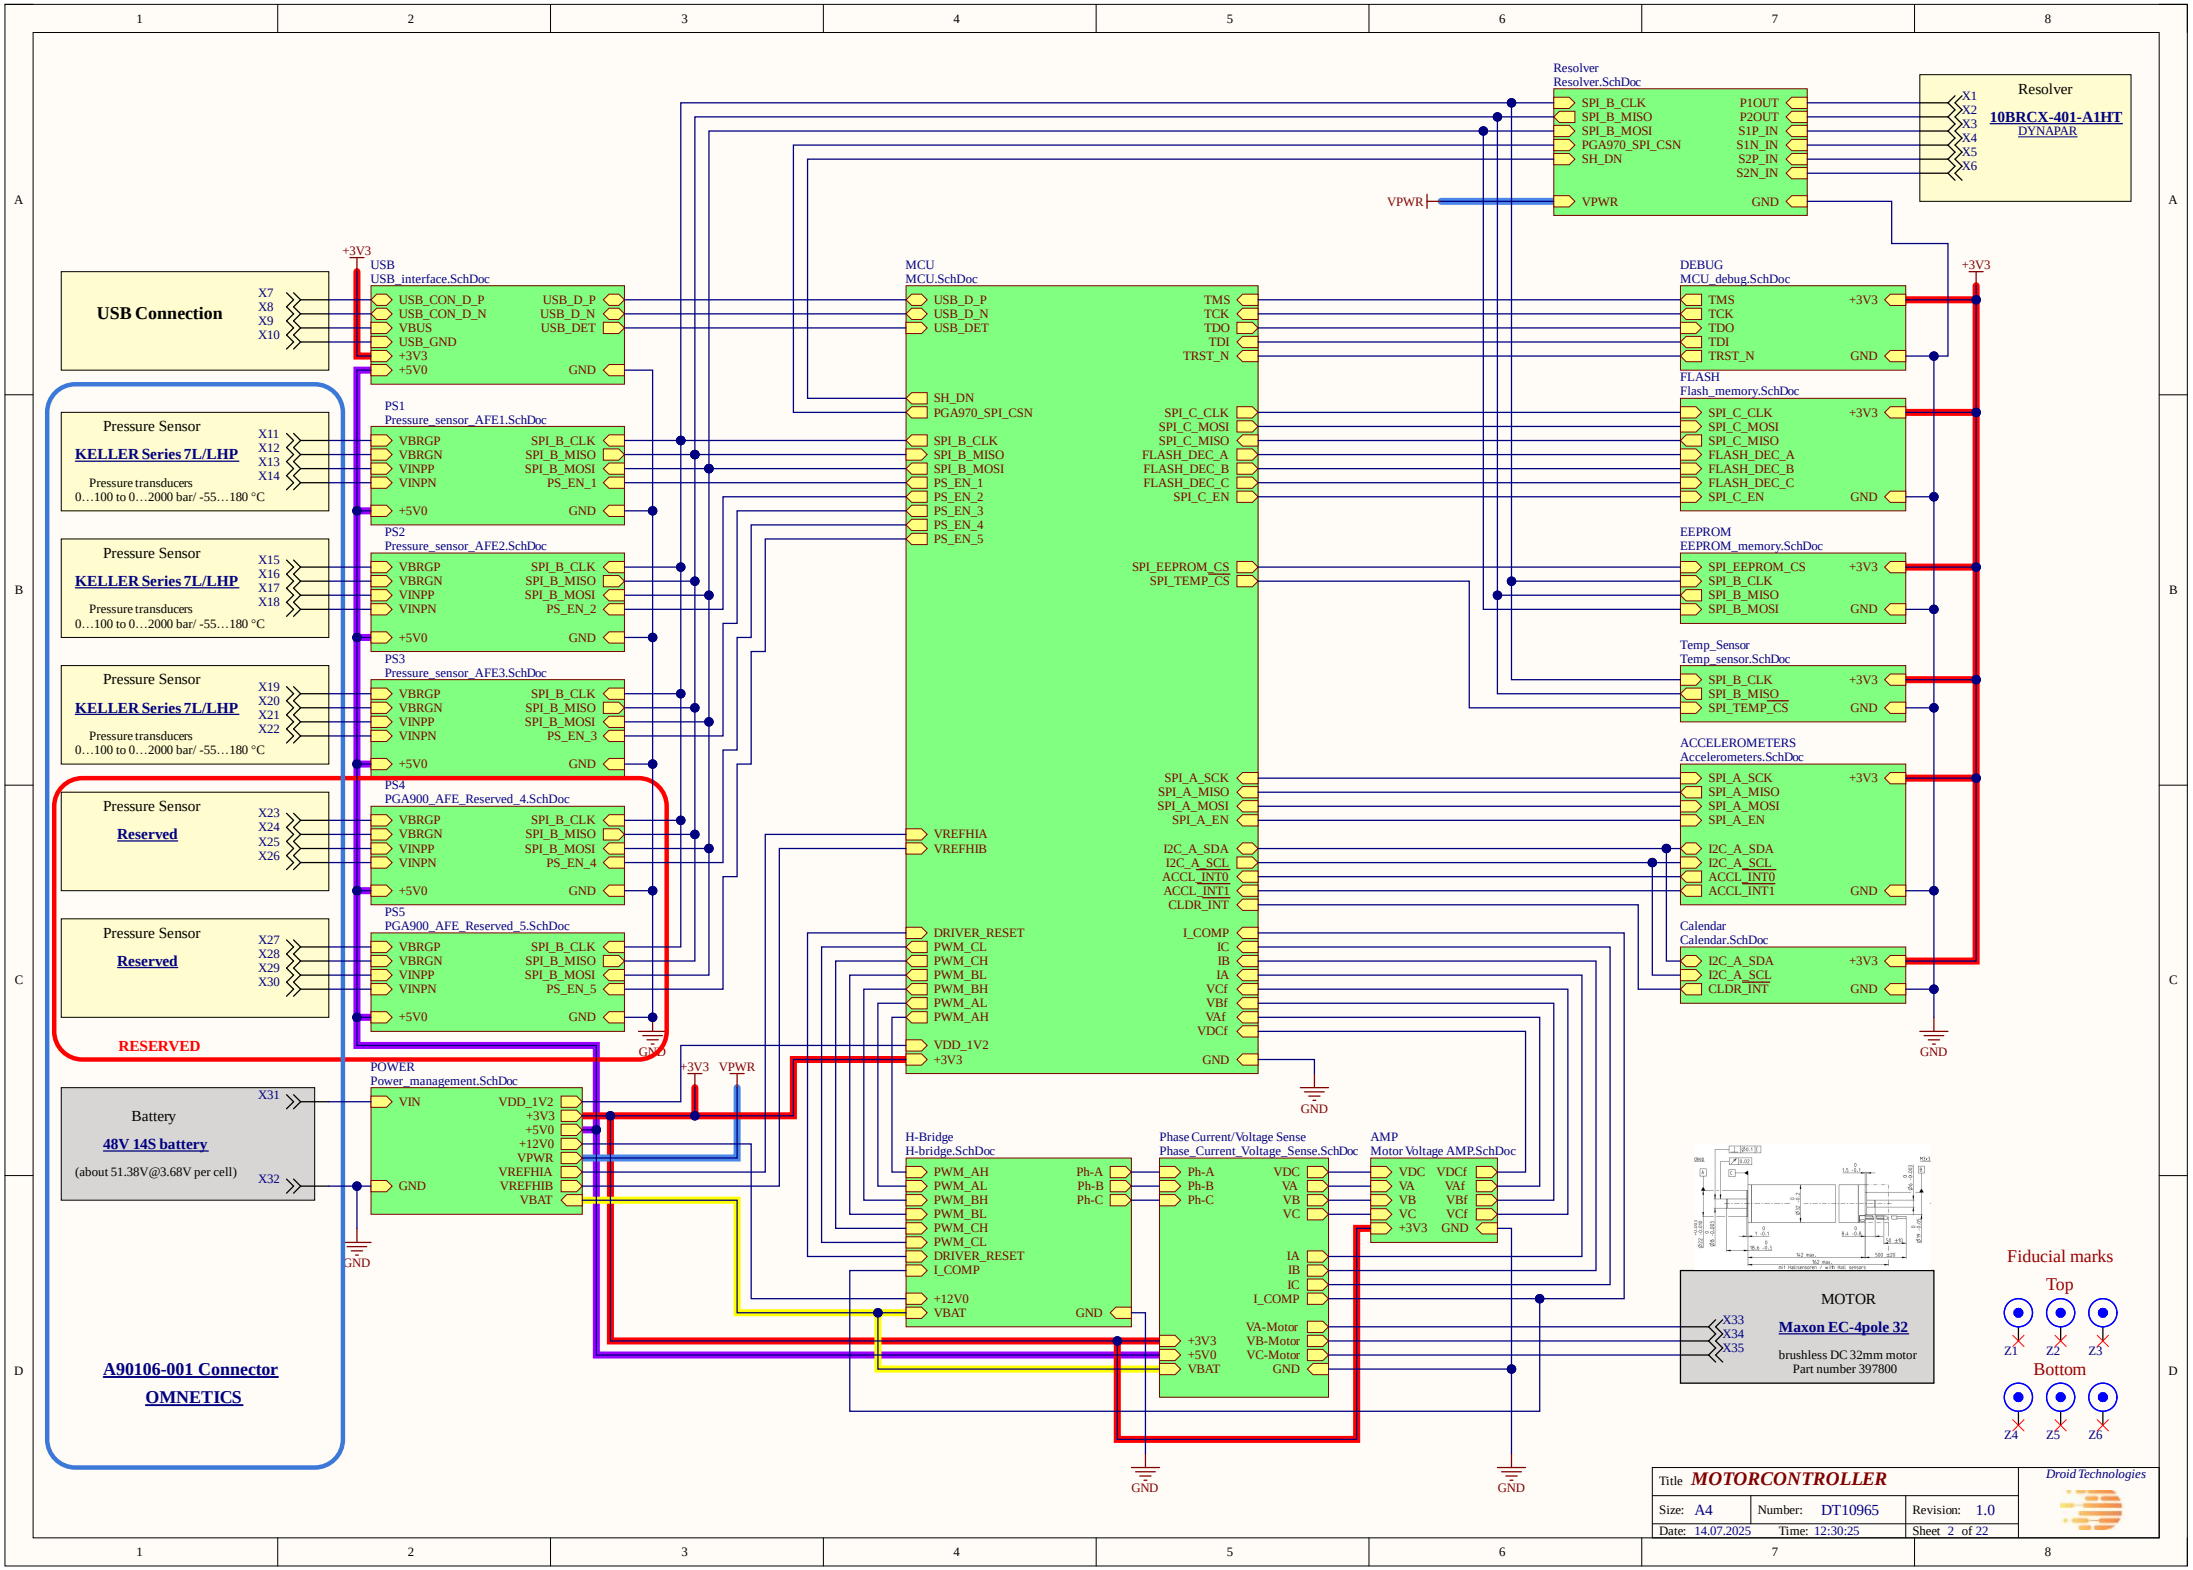
Resolver
Resolver.SchDoc
SPI_B_CLK
SPI_B_MISO
SPI_B_MOSI
PGA970_SPI_CSN
SH_DN
P1OUT
P2OUT
S1P_IN
S1N_IN
S2P_IN
S2N_IN
VPWR
GND
Resolver
10BRCX-401-A1HT
DYNAPAR
X1
X2
X3
X4
X5
X6
USB Connection
X7
X8
X9
X10
USB
USB_interface.SchDoc
USB_CON_D_P
USB_CON_D_N
VBUS
USB_GND
+3V3
+5V0
USB_D_P
USB_D_N
USB_DET
MCU
MCU.SchDoc
TMS
TCK
TDO
TDI
TRST_N
SPI_C_CLK
SPI_C_MOSI
SPI_C_MISO
FLASH_DEC_A
FLASH_DEC_B
FLASH_DEC_C
SPI_C_EN
PS_EN_1
PS_EN_2
PS_EN_3
PS_EN_4
PS_EN_5
SPI_EEPROM_CS
SPI_TEMP_CS
SPI_A_SCK
SPI_A_MISO
SPI_A_MOSI
SPI_A_EN
VREFHIA
VREFHIB
I2C_A_SDA
I2C_A_SCL
ACCL_INT0
ACCL_INT1
CLDR_INT
DRIVER_RESET
PWM_CL
PWM_CH
PWM_BL
PWM_BH
PWM_AL
PWM_AH
I_COMP
IC
IB
IA
VCf
VBf
VAf
VDCf
VDD_1V2
DEBUG
MCU_debug.SchDoc
FLASH
Flash_memory.SchDoc
EEPROM
EEPROM_memory.SchDoc
Temp_Sensor
Temp_sensor.SchDoc
ACCELEROMETERS
Accelerometers.SchDoc
Calendar
Calendar.SchDoc
Pressure Sensor
KELLER Series 7L/LHP
Pressure transducers
0…100 to 0…2000 bar/ -55…180 °C
X11
X12
X13
X14
X15
X16
X17
X18
X19
X20
X21
X22
PS1
Pressure_sensor_AFE1.SchDoc
PS2
Pressure_sensor_AFE2.SchDoc
PS3
Pressure_sensor_AFE3.SchDoc
VBRGP
VBRGN
VINPP
VINPN
PS_EN_1
PS_EN_2
PS_EN_3
Pressure Sensor
Reserved
X23
X24
X25
X26
X27
X28
X29
X30
PS4
PGA900_AFE_Reserved_4.SchDoc
PS5
PGA900_AFE_Reserved_5.SchDoc
PS_EN_4
PS_EN_5
RESERVED
Battery
48V 14S battery
(about 51.38V@3.68V per cell)
X31
X32
POWER
Power_management.SchDoc
VIN
+12V0
VPWR
VREFHIA
VREFHIB
VBAT
H-Bridge
H-bridge.SchDoc
Ph-A
Ph-B
Ph-C
Phase Current/Voltage Sense
Phase_Current_Voltage_Sense.SchDoc
VDC
VA
VB
VC
VA-Motor
VB-Motor
VC-Motor
AMP
Motor Voltage AMP.SchDoc
MOTOR
Maxon EC-4pole 32
brushless DC 32mm motor
Part number 397800
X33
X34
X35
Fiducial marks
Top
Bottom
Z1
Z2
Z3
Z4
Z5
Z6
A90106-001 Connector
OMNETICS
Title MOTORCONTROLLER
Size: A4
Number: DT10965
Revision: 1.0
Date: 14.07.2025
Time: 12:30:25
Sheet 2 of 22
Droid Technologies


MCU





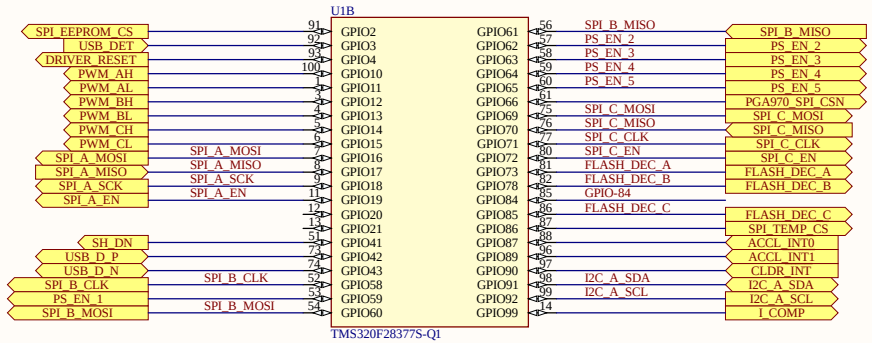



Device supply voltage, I/O, VDDIO = +3.14V to +3.47V (30mA(max))
Device supply voltage, VDD = +1.14V to +1.26V (400mA(max))
Analog supply voltage, VDDA = +3.14V to +3.47V (20mA(max))
IDD3VFL = 40mA(max) @
Ambient operating temperature (max) = –40°C to 125°C free-air

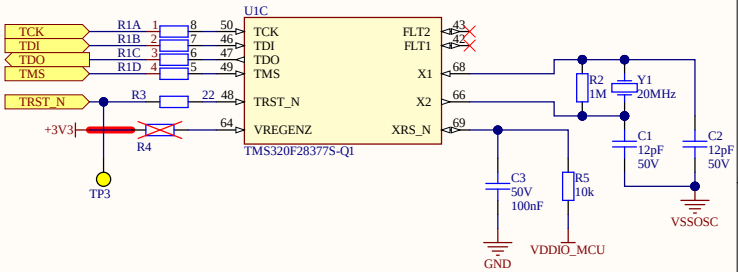



SPI Connection table


Type	IC connection	Maximum SPI Working Frequency	SPI Port#	SPI CS PIN	
MCU	TMS320F28377S-Q1	3 high-speed SPI-UP to 50 MHz	SPI A/B/C	Port Name	I/O
Flash	MT25QL01GBBB8E12-0AUT	90/27 (fC/fR)- Clock frequency	SPI C	SPI_C_EN	GPIO72(+73,78,86)
EEPROM	25LC256-H/SN	3 MHz (at +3,3V)	SPI B	SPI_EEPROM_CS	GPIO2
TempSens	TMP127EDBVRQ1	10 MHz (Max)	SPI A	SPI_TEMP_\C\S\	GPIO86
Accelerometer	SCA3100-D07-1	8 MHz (MAX)	SPI A	SPI_A_EN	GPIO19
Resolver AFE	PGA970QPHPR	1 MHz (MAX)	SPI B	PGA970_SPI_CSN	GPIO66
Pressure sensor AFE1	PGA900ARHHR	1 MHz (MAX)	SPI B	PS_EN_1	GPIO59
Pressure sensor AFE2	PGA900ARHHR	1 MHz (MAX)	SPI B	PS_EN_2	GPIO62
Pressure sensor AFE3	PGA900ARHHR	1 MHz (MAX)	SPI B	PS_EN_3	GPIO63
Pressure sensor AFE4	PGA900ARHHR	1 MHz (MAX)	SPI B	PS_EN_4	GPIO64
Pressure sensor AFE5	PGA900ARHHR	1 MHz (MAX)	SPI B	PS_EN_5	GPIO65

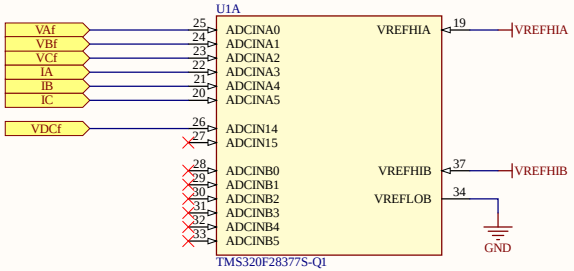

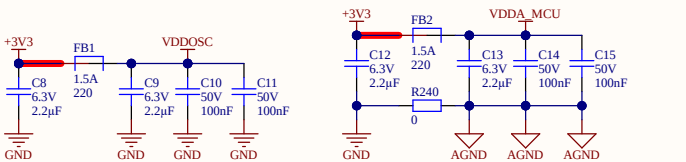


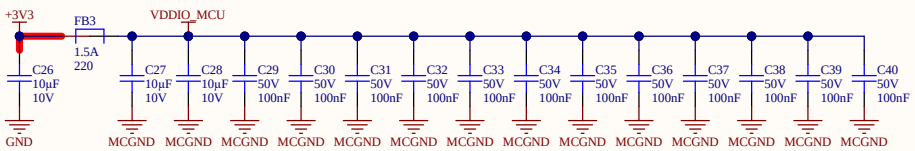


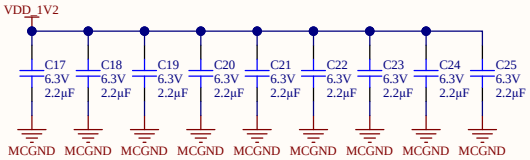

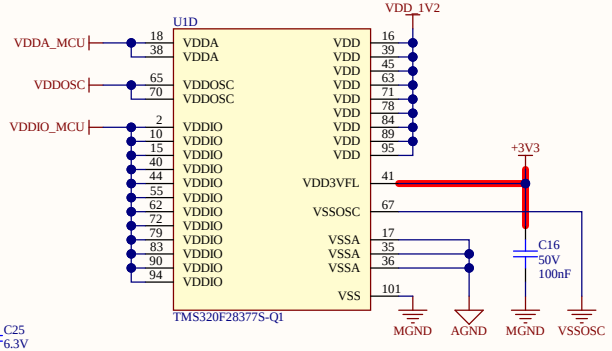

Title	MOTORCONTROLLER		Droid Technologies
Size: A4	Number: DT10965	Revision: 1.0	
Date: 14.07.2025	Time: 12:30:25	Sheet 3 of 22	




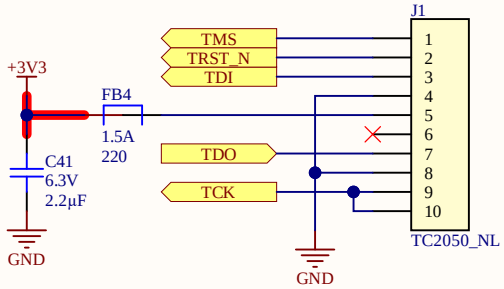

Use TC2050-IDC-430-NL cable for debug connection

TC2050-IDC-430-NL connection scheme

14-pin Ribbon Pin #	TC2050-IDC-430 Pin #
1	1
2	2
...	...
8	8
9	9
10	(NC)
11	10
12	(NC)
13	(NC)
14	(NC)

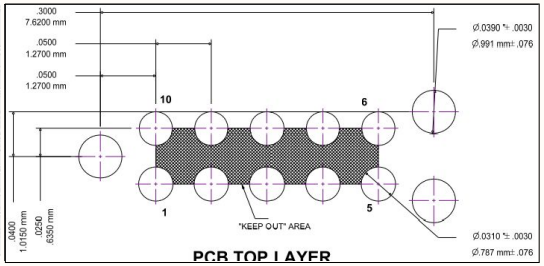

TI debug connection scheme


Figure 1. 14-Pin Header Signals and Header Dimensions

TMS	1	2	$\overline{\text{TRST}}$
TDI	3	4	GND
PD (V_{CC})	5	6	no pin (key)†
TDO	7	8	GND
TCK_RET	9	10	GND
TCK	11	12	GND
EMU0	13	14	EMU1


Header Dimensions:
Pin-to-pin spacing, 0.100 in. (X,Y)
Pin width, 0.025-in. square post
Pin length, 0.235-in. nominal

More details about debug connection from TI

Title	***MOTORCONTROLLER***		*Droid Technologies*
Size: A4	Number: DT10965	Revision: 1.0	
Date: 14.07.2025	Time: 12:30:26	Sheet 4 of 22	

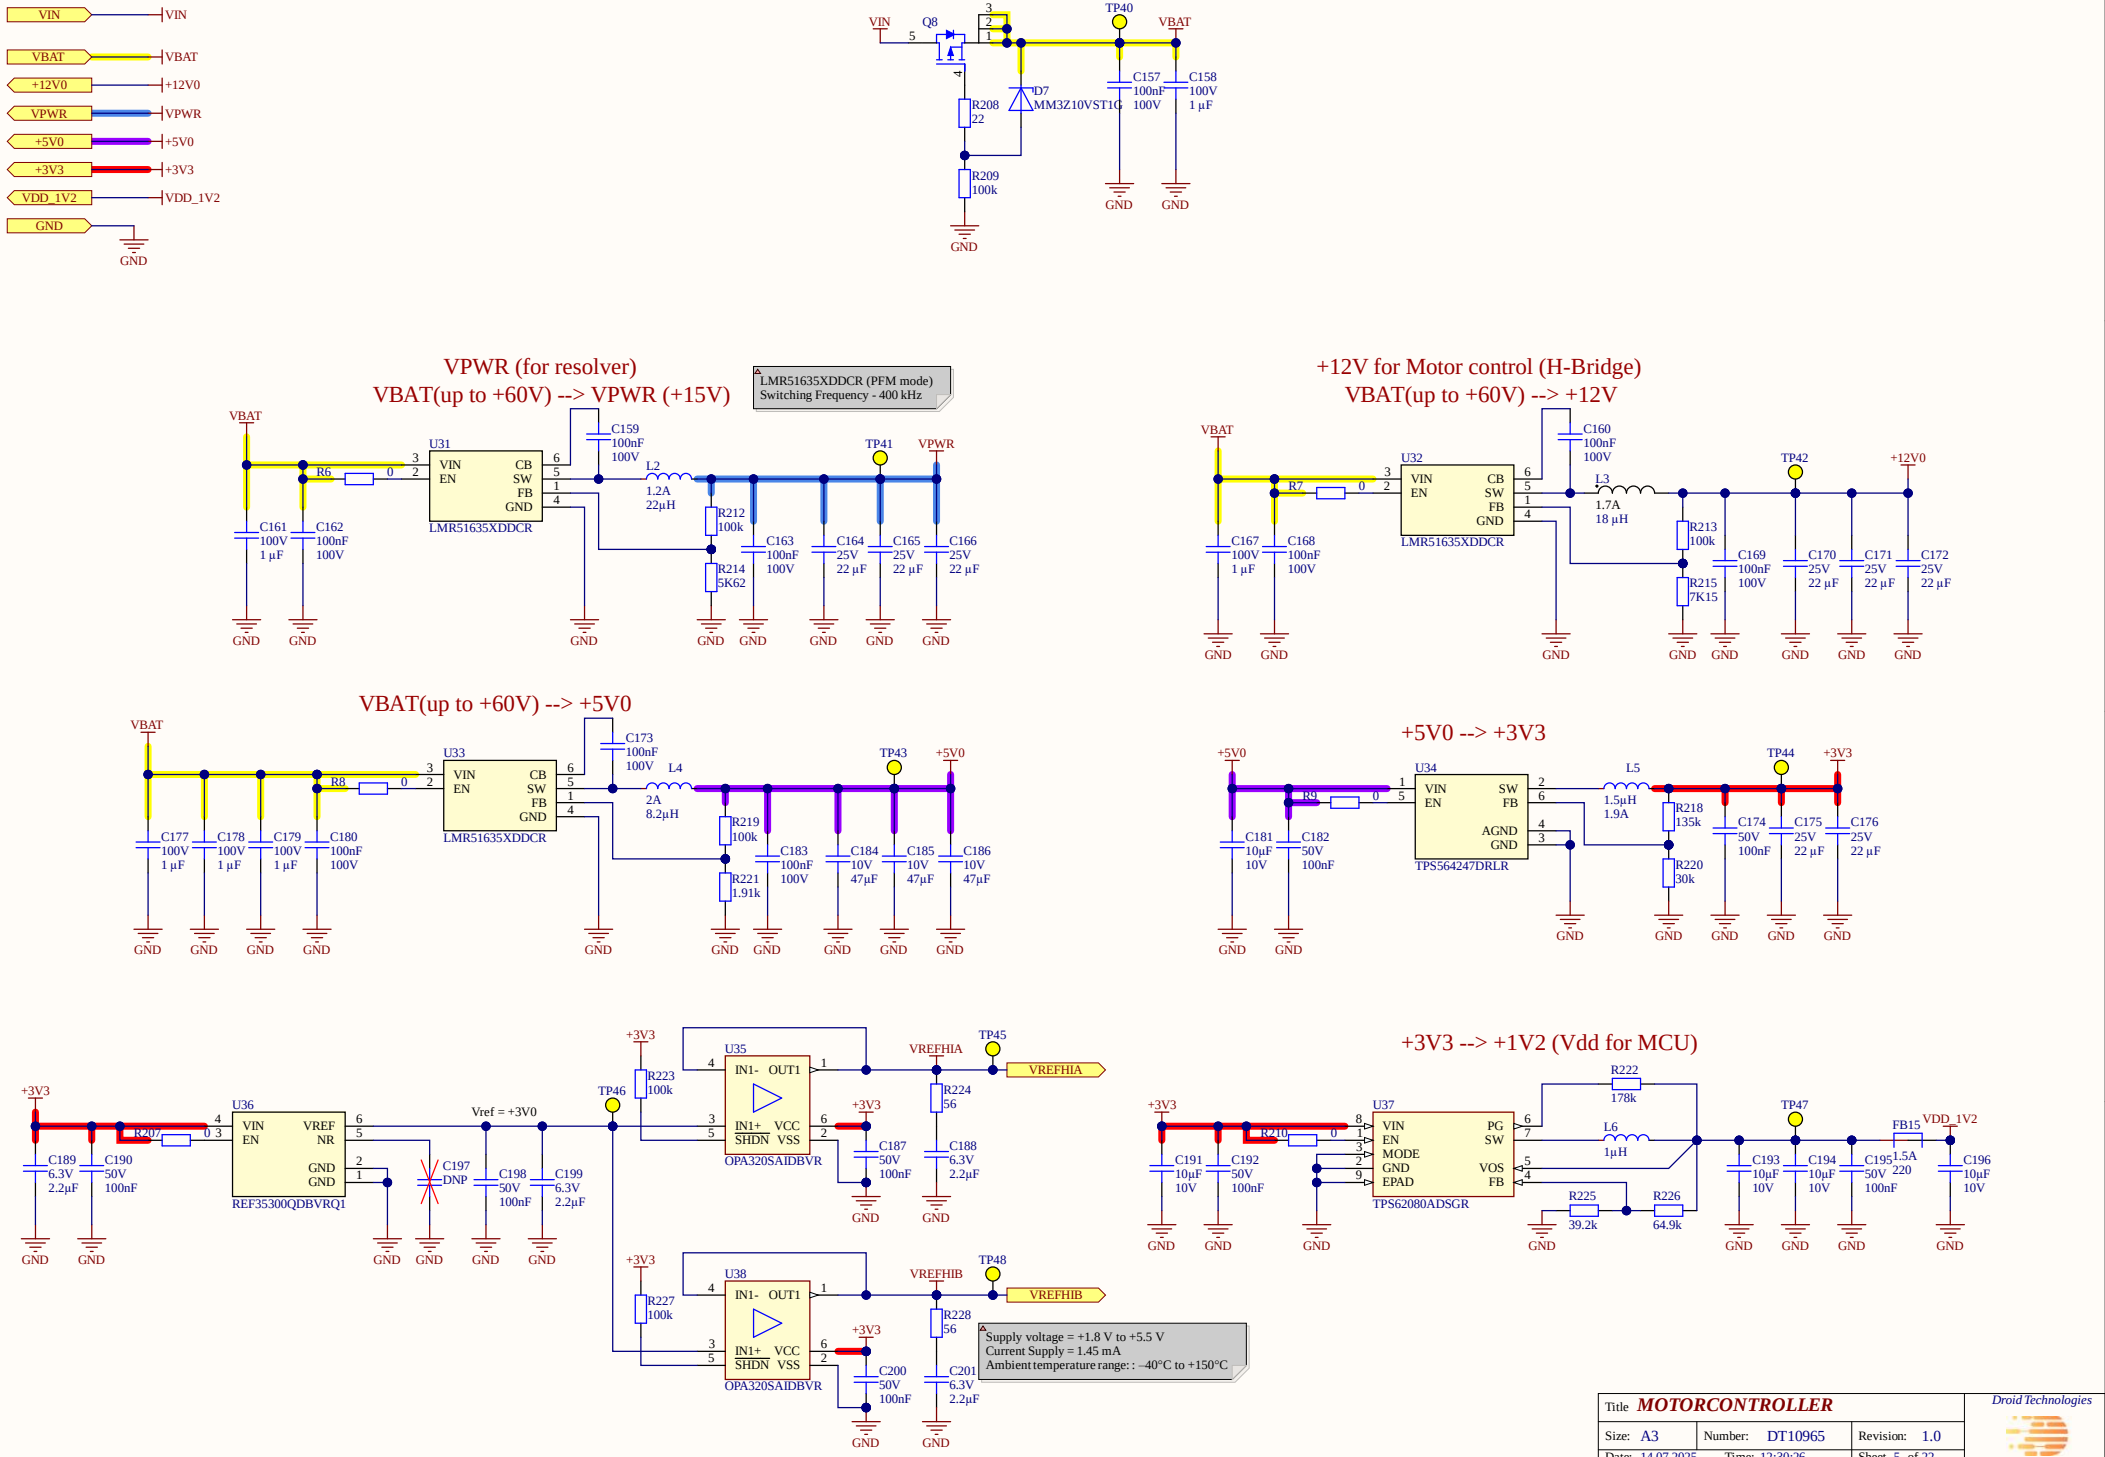

VIN
VBAT
+12V0
VPWR
+5V0
+3V3
VDD_1V2
GND
Q8
D7
MM3Z10VST1G
TP40
R208 22
R209 100k
C157 100nF 100V
C158 100V 1 µF
VPWR (for resolver)
VBAT(up to +60V) --> VPWR (+15V)
LMR51635XDDCR (PFM mode)
Switching Frequency - 400 kHz
U31
LMR51635XDDCR
L2 1.2A 22µH
TP41
+12V for Motor control (H-Bridge)
VBAT(up to +60V) --> +12V
U32
L3 1.7A 18 µH
TP42
VBAT(up to +60V) --> +5V0
U33
L4 2A 8.2µH
TP43
+5V0 --> +3V3
U34
TPS564247DRLR
L5 1.5µH 1.9A
TP44
+3V3 --> +1V2 (Vdd for MCU)
U35
OPA320SAIDBVR
U36
REF35300QDBVRQ1
Vref = +3V0
U37
TPS62080ADSGR
L6 1µH
U38
TP45
TP46
TP47
TP48
VREFHIA
VREFHIB
Supply voltage = +1.8 V to +5.5 V
Current Supply = 1.45 mA
Ambient temperature range: : –40°C to +150°C
Title MOTORCONTROLLER
Size: A3
Number: DT10965
Revision: 1.0
Date: 14.07.2025
Time: 12:30:26
Sheet 5 of 22
Droid Technologies

FLASH MEMORY

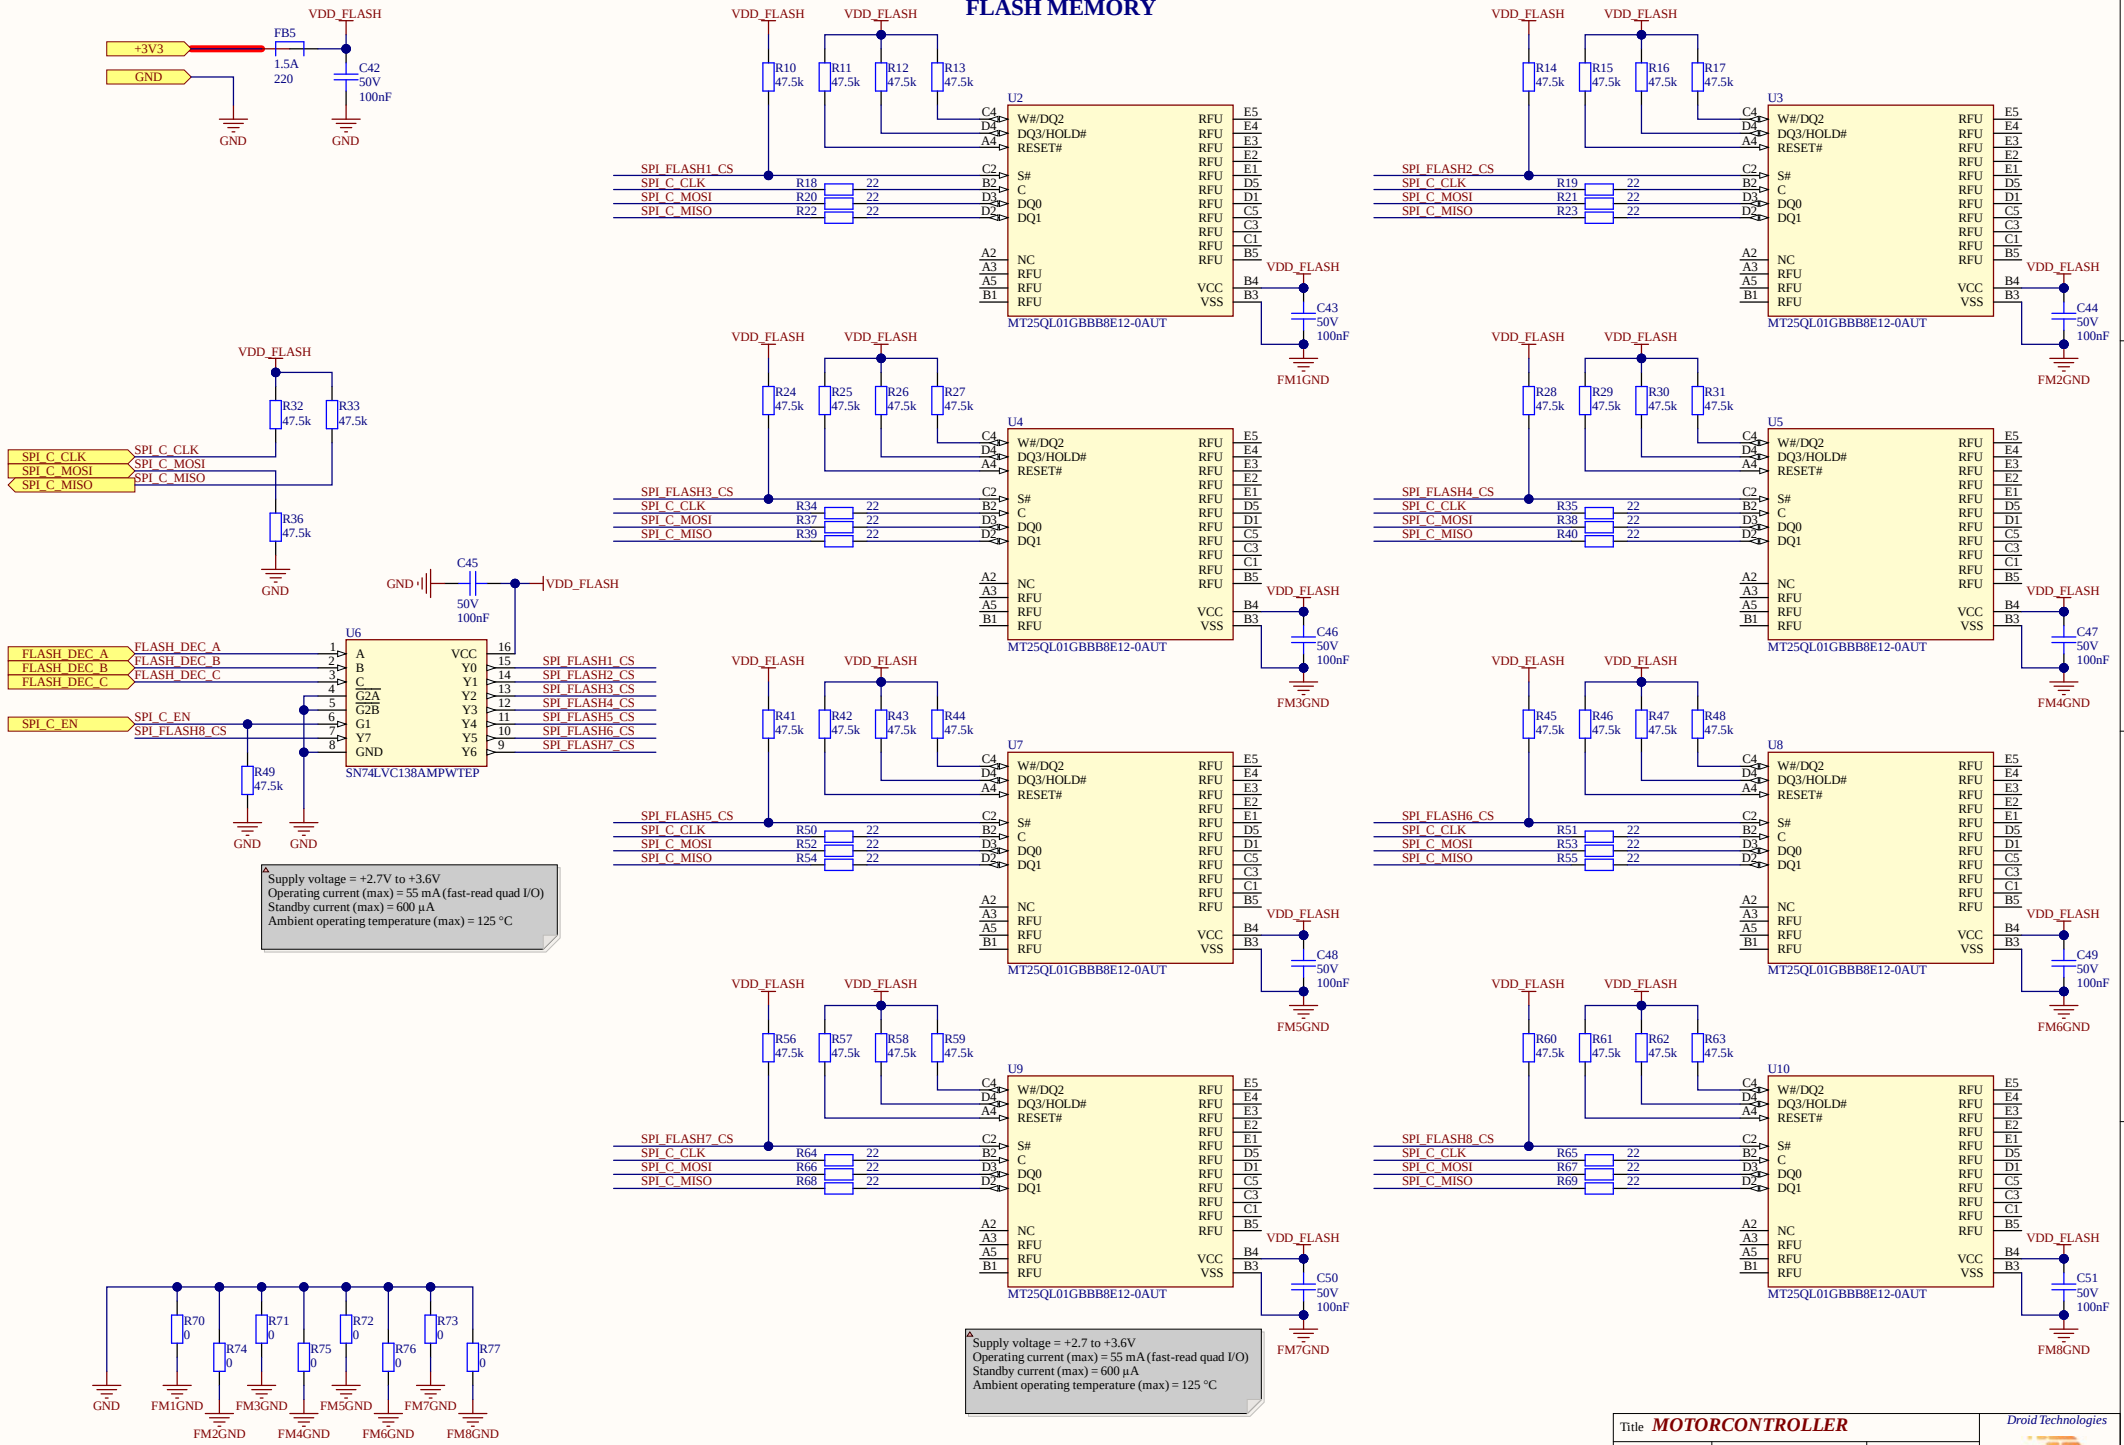


Title	MOTORCONTROLLER		Droid Technologies
Size: A3	Number: DT10965	Revision: 1.0	
Date: 14.07.2025	Time: 12:30:26	Sheet 6 of 22	

EEPROM MEMORY

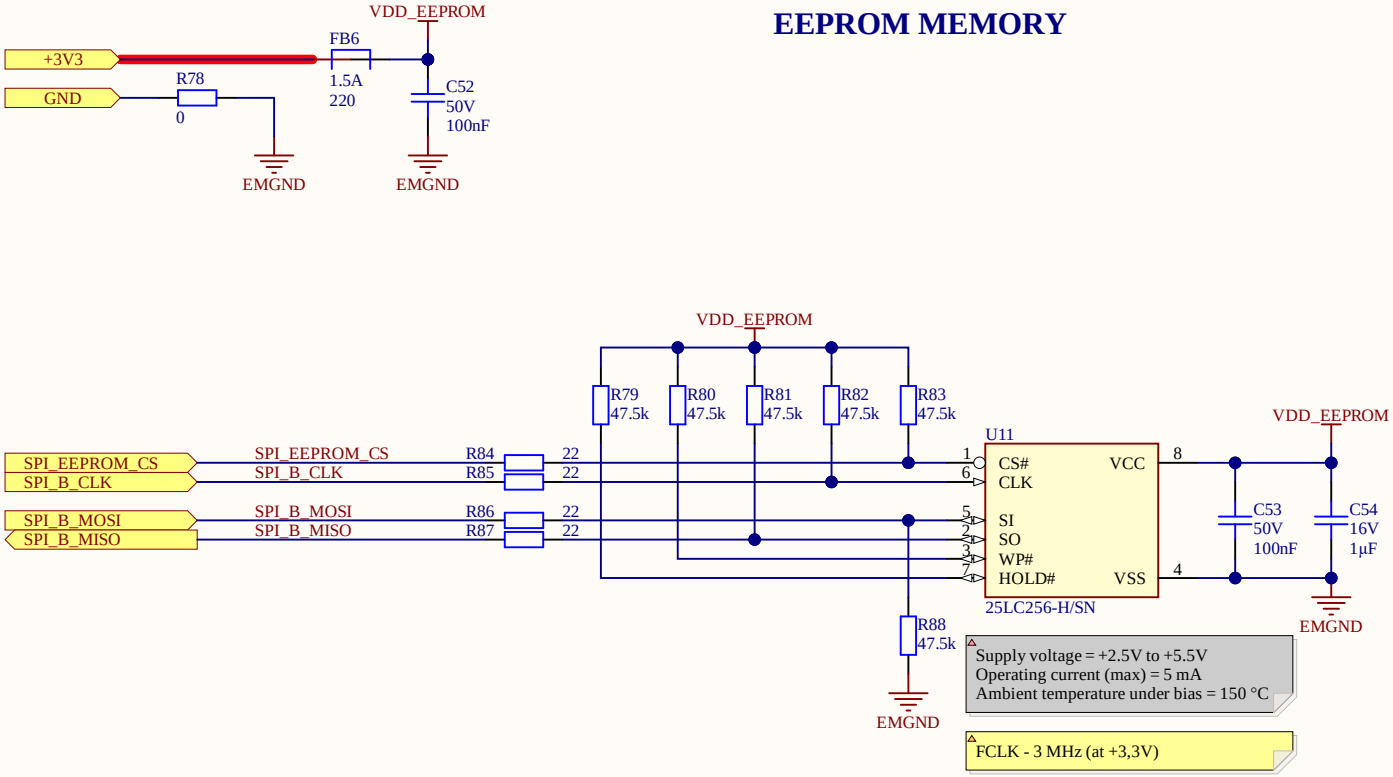


Title	***MOTORCONTROLLER***		*Droid Technologies*
Size: A4	Number: DT10965	Revision: 1.0	
Date: 14.07.2025	Time: 12:30:26	Sheet 7 of 22	

TEMP SENSOR

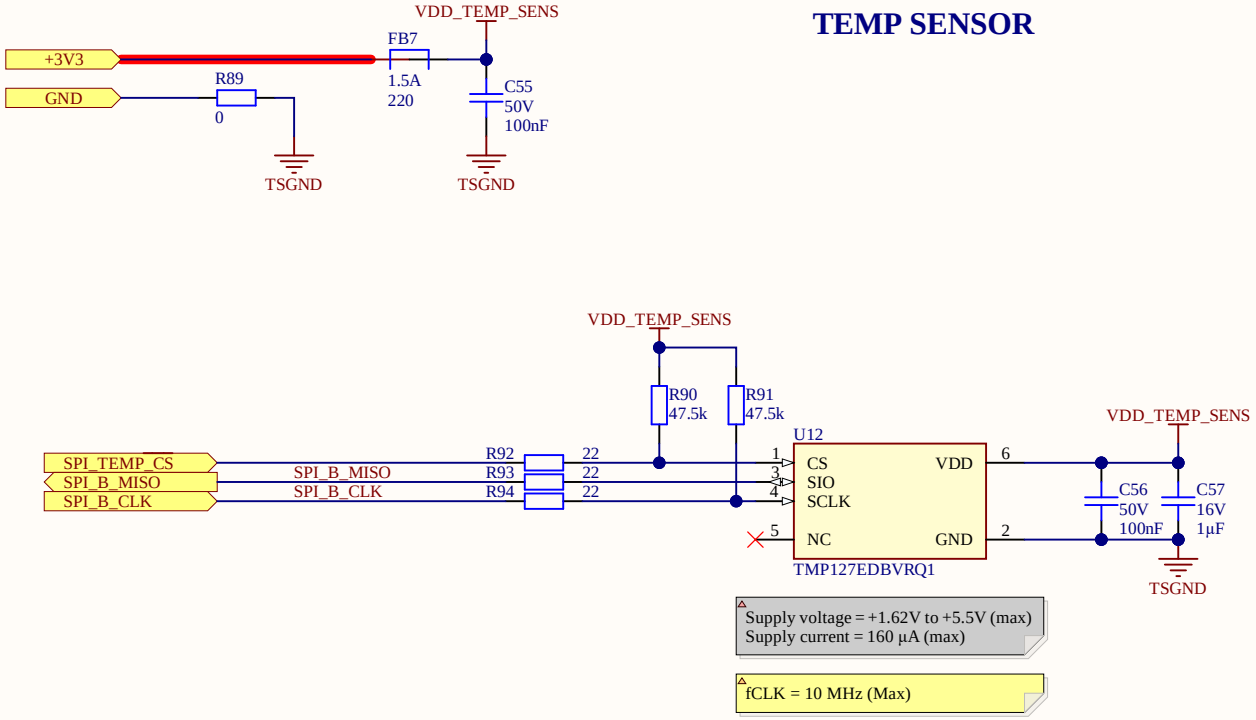


Title	***MOTORCONTROLLER***		*Droid Technologies*
Size: A4	Number: DT10965	Revision: 1.0	
Date: 14.07.2025	Time: 12:30:26	Sheet 8 of 22	

ACCELEROMETERS

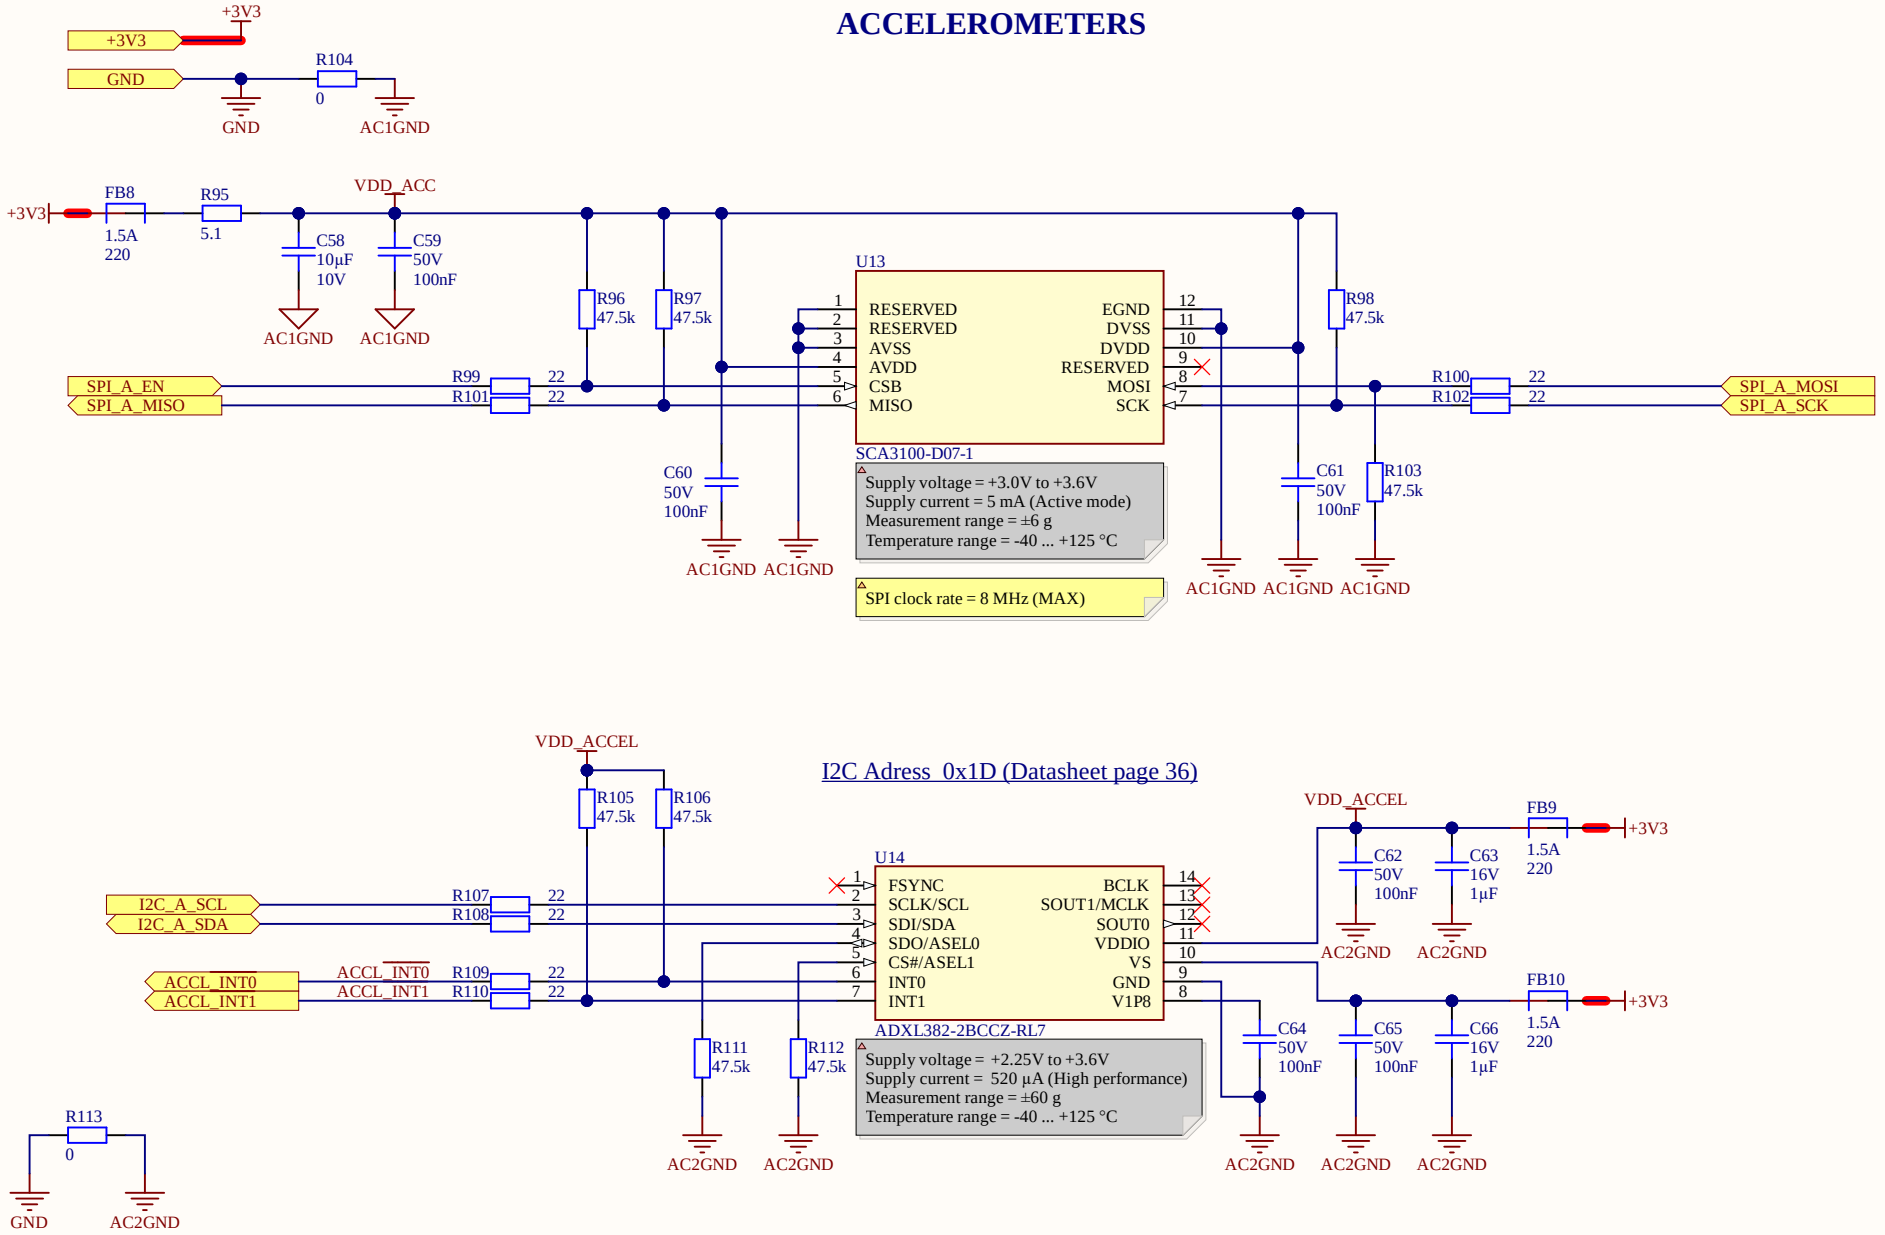


Title	**MOTORCONTROLLER**		*Droid Technologies*
Size: A4	Number: DT10965	Revision: 1.0	
Date: 14.07.2025	Time: 12:30:26	Sheet 9 of 22	

H-Bridge

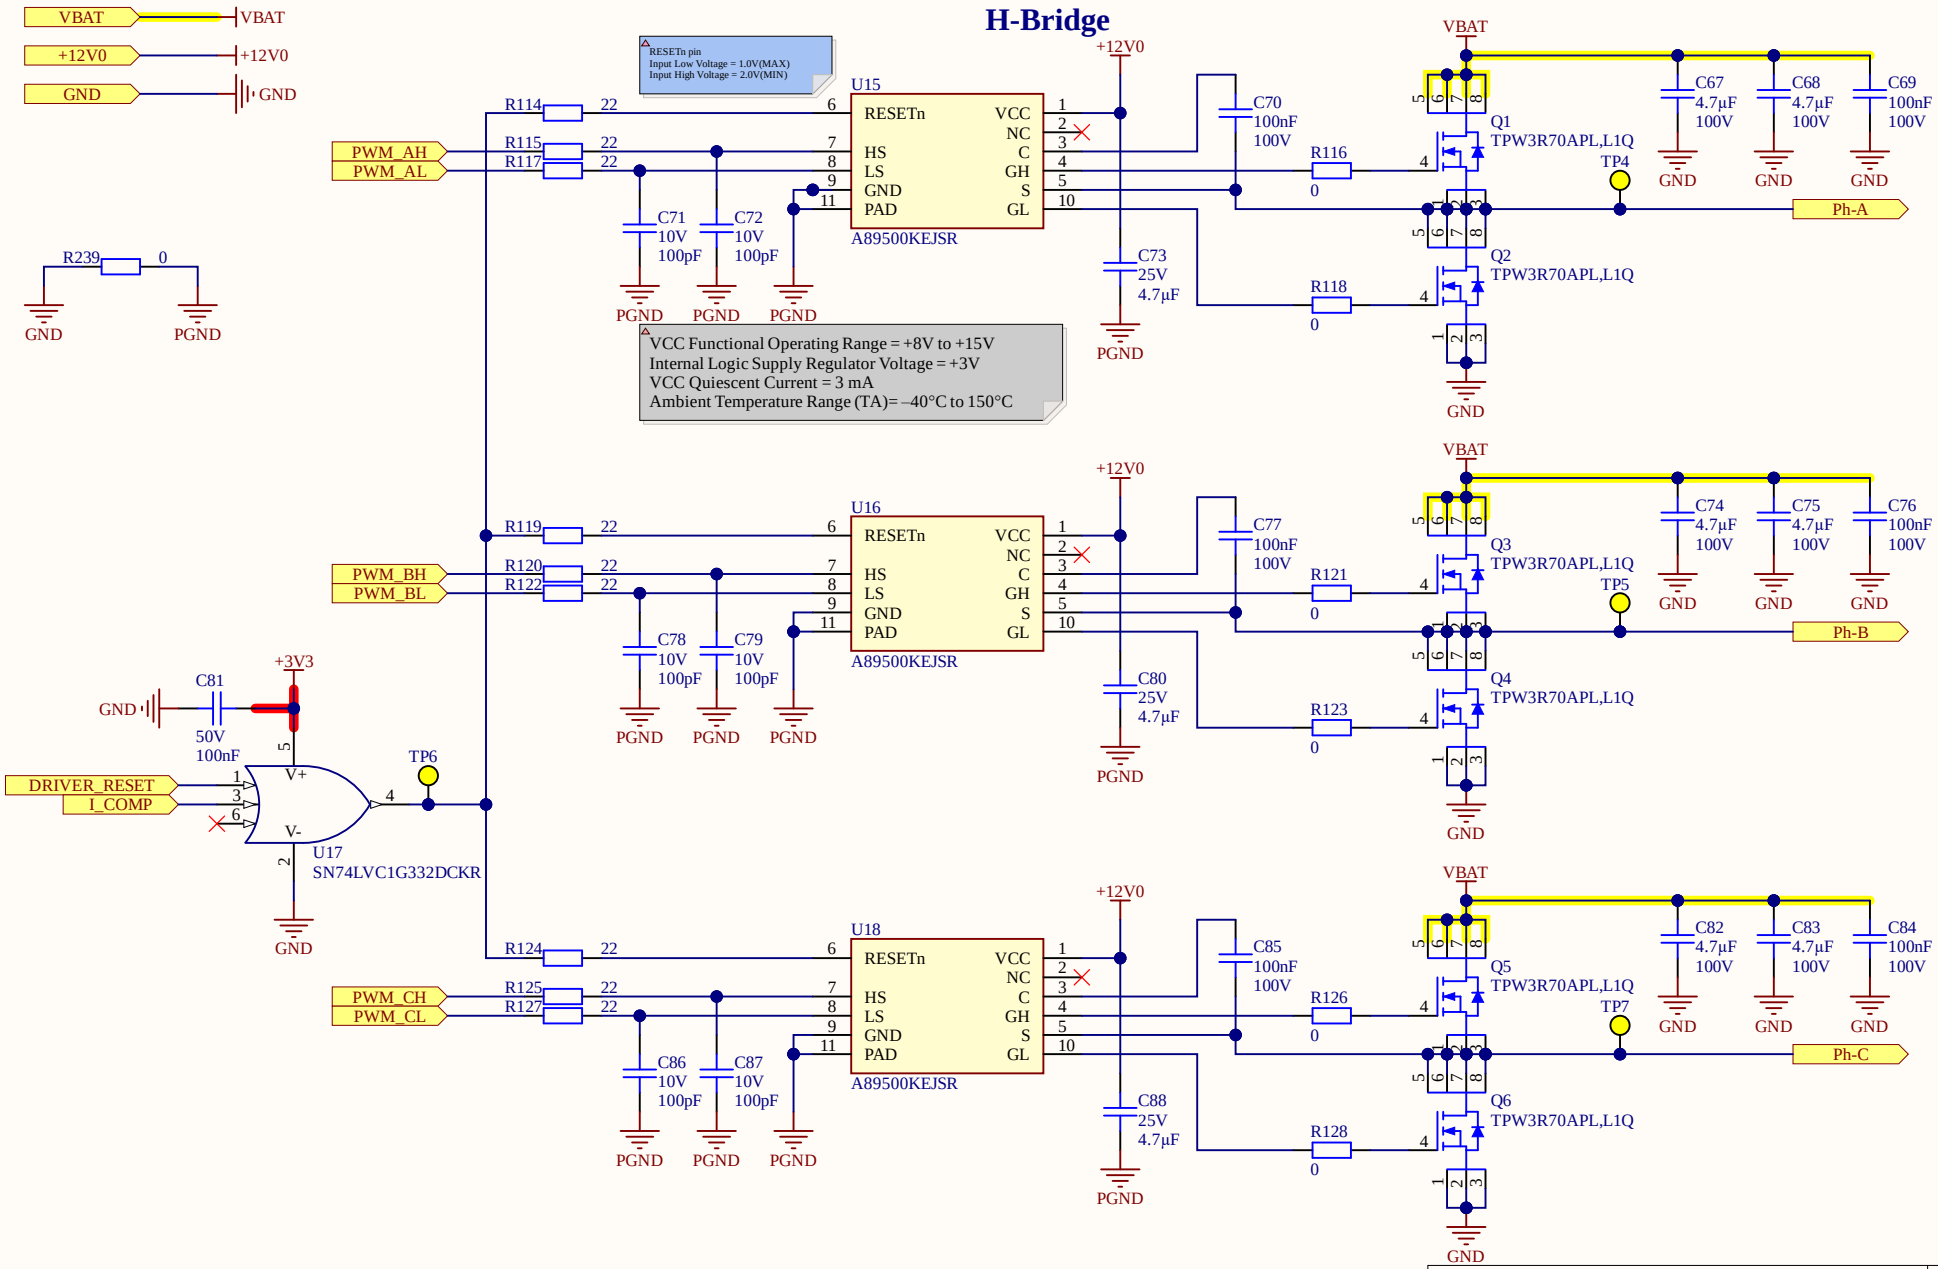


Title	**MOTORCONTROLLER**		*Droid Technologies*
Size: A4	Number: DT10965	Revision: 1.0	
Date: 14.07.2025	Time: 12:30:26	Sheet 10 of 22	

Phase Current/Voltage Sense

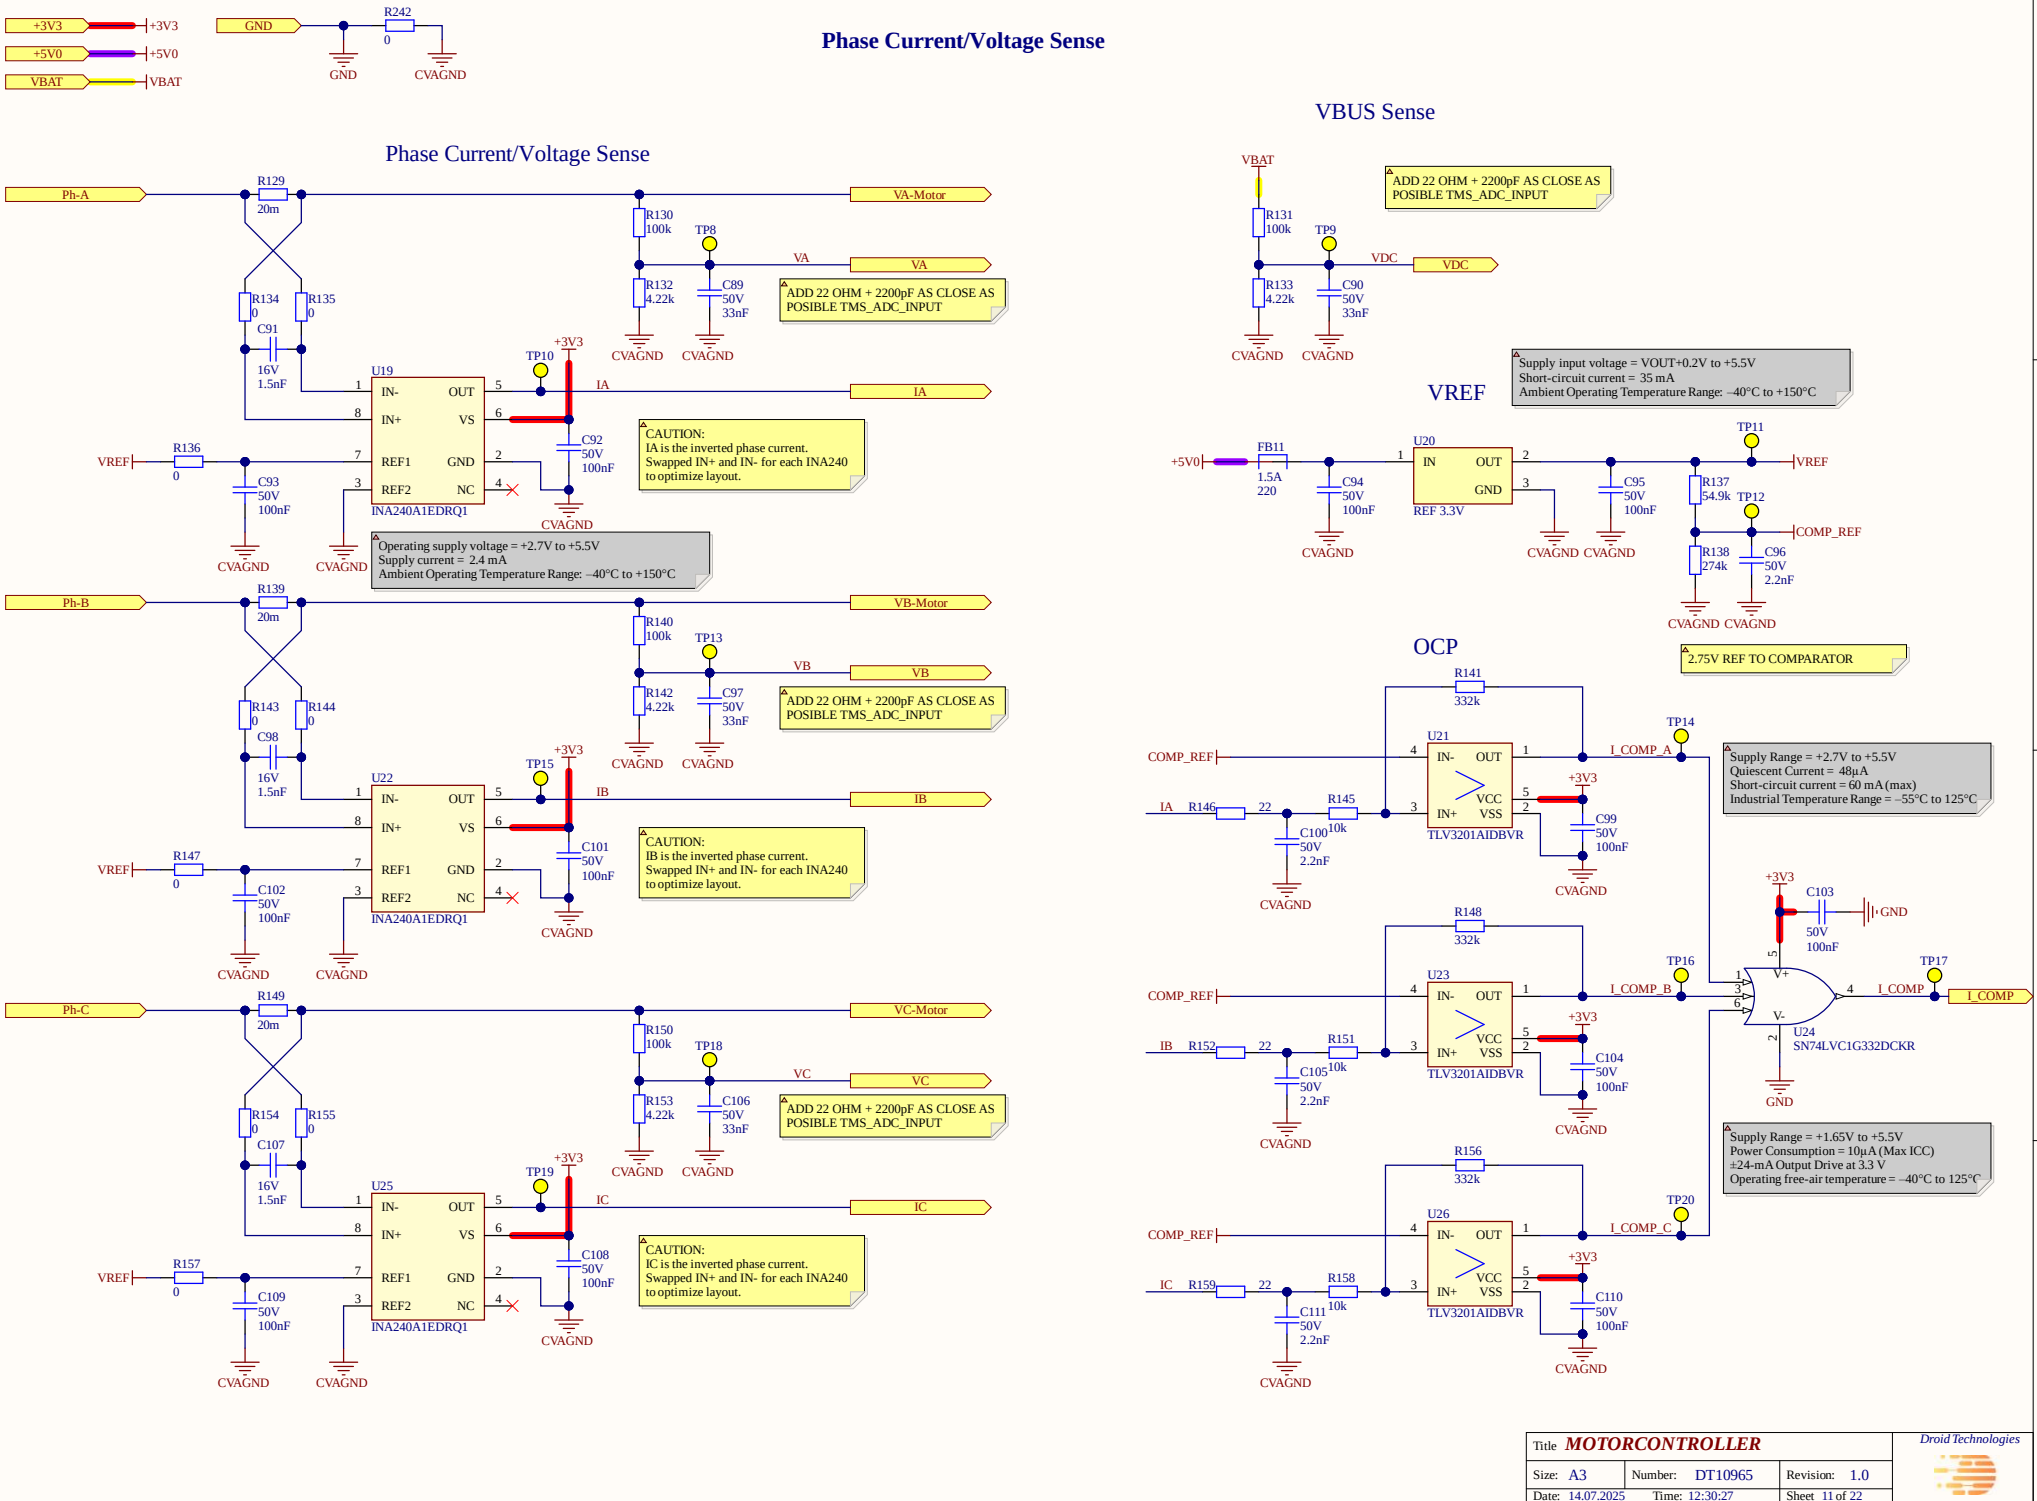


Title	MOTORCONTROLLER		Droid Technologies
Size: A3	Number: DT10965	Revision: 1.0	
Date: 14.07.2025	Time: 12:30:27	Sheet 11 of 22	

Resolver AFE

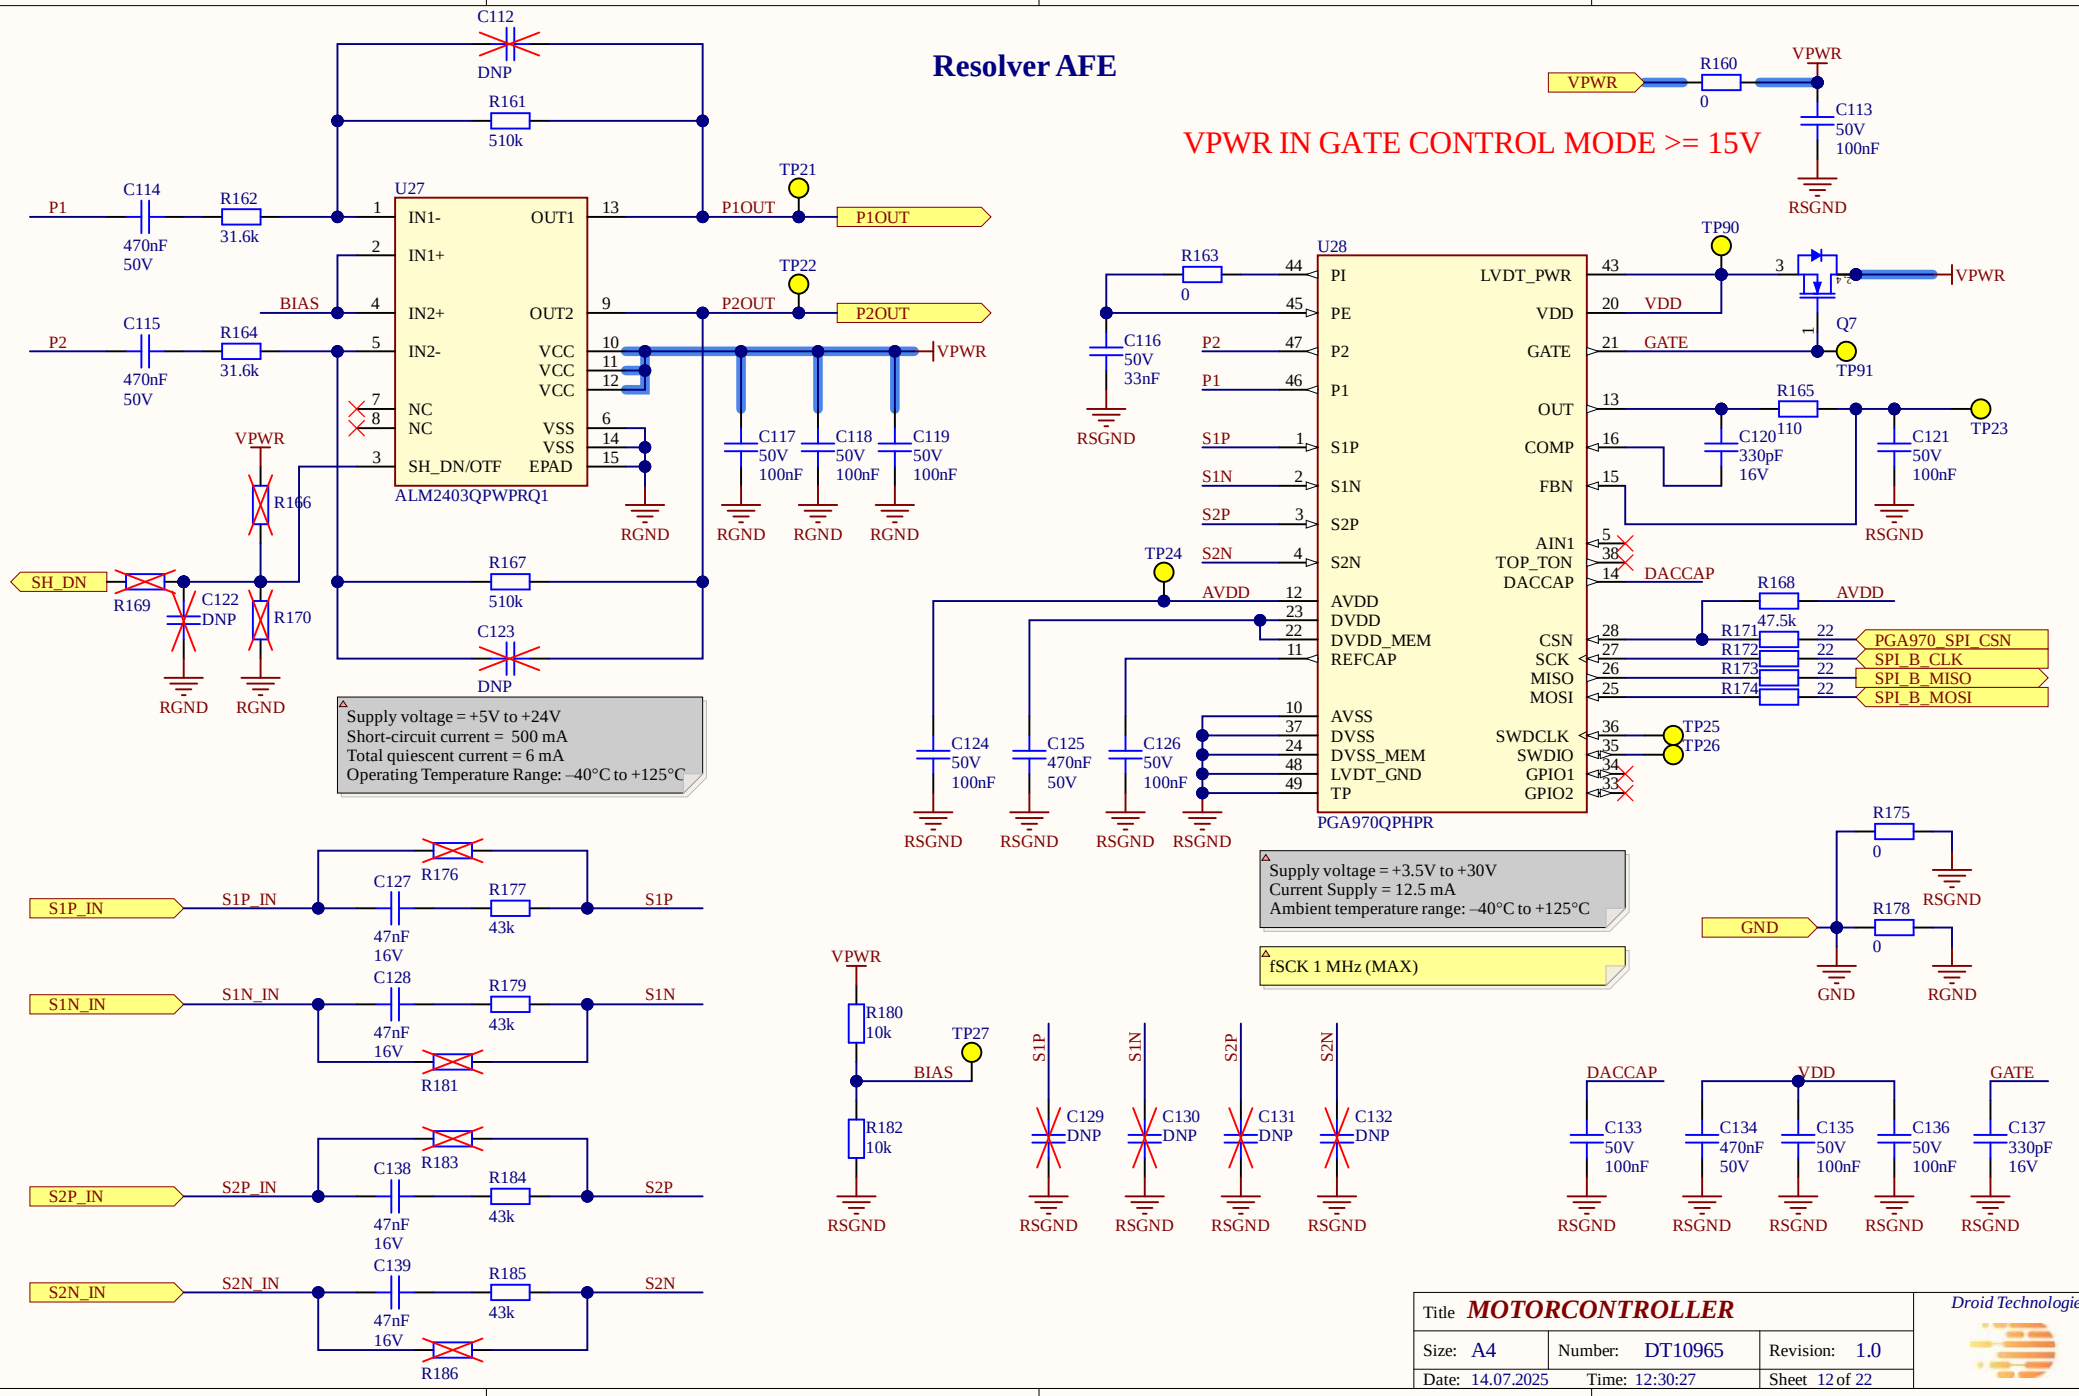

Title	**MOTORCONTROLLER**		*Droid Technologies*
Size: A4	Number: DT10965	Revision: 1.0	
Date: 14.07.2025	Time: 12:30:27	Sheet 12 of 22	

Pressure sensor AFE 1

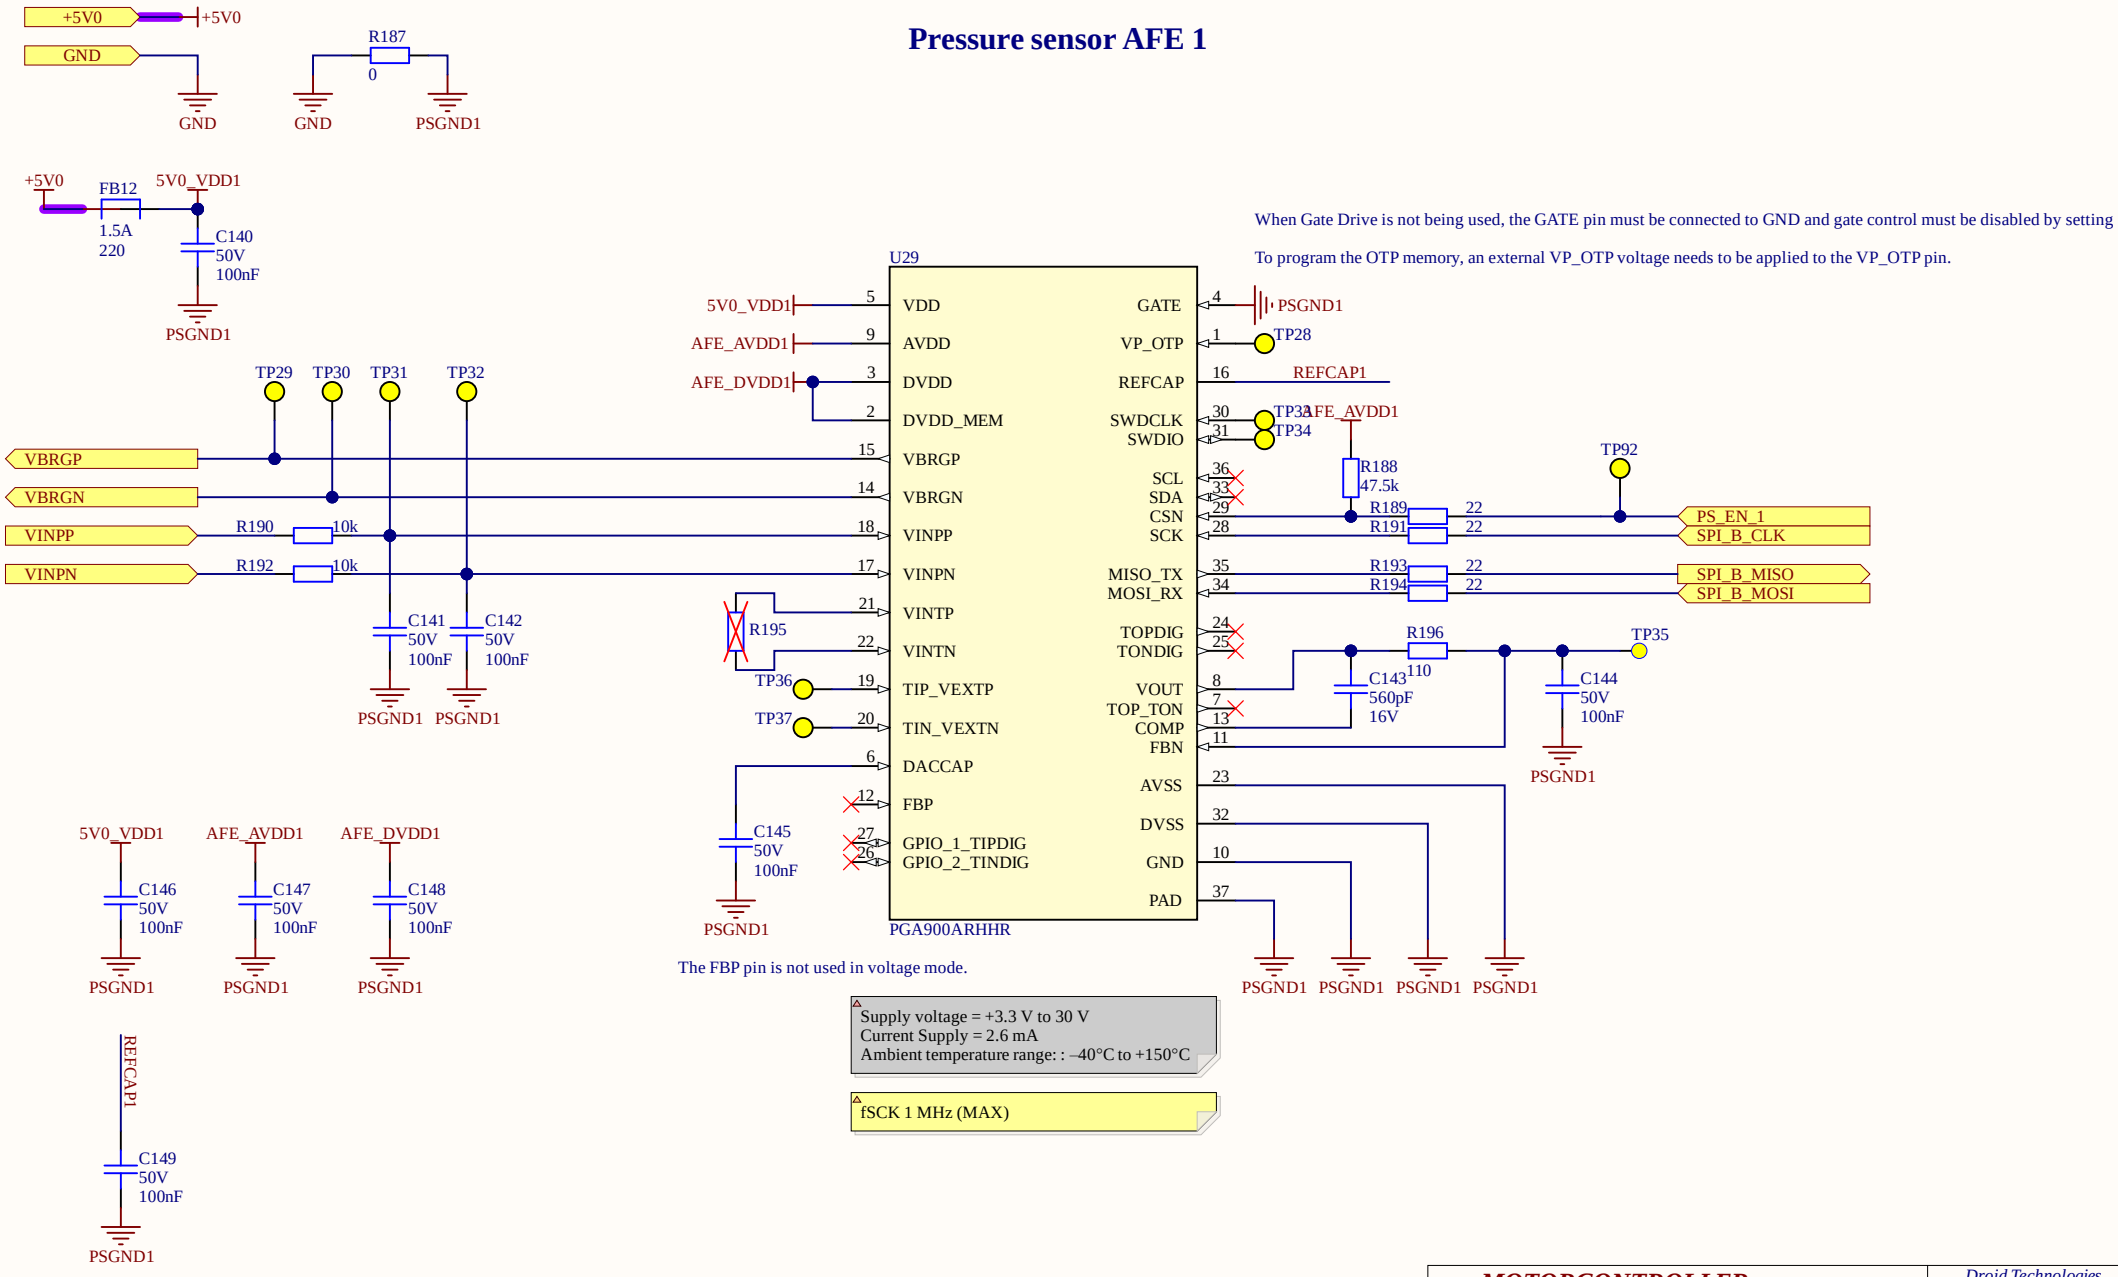

Title	**MOTORCONTROLLER**		*Droid Technologies*
Size: A4	Number: DT10965	Revision: 1.0	
Date: 14.07.2025	Time: 12:30:27	Sheet 13 of 22	

PGA900 AFE Reserved 1

+5V0 +5V0

GND GND

R229 0 GND PSGND4

+5V0 FB16 1.5A 220 5V0_VDD4 C202 50V 100nF PSGND4

When Gate Drive is not being used, the GATE pin must be connected to GND and gate control must be disabled by setting

To program the OTP memory, an external VP_OTP voltage needs to be applied to the VP_OTP pin.

U39

5V0_VDD4	5 VDD	GATE 4	PSGND4
AFE_AVDD4	9 AVDD	VP_OTP 1	TP49
AFE_DVDD4	3 DVDD	REFCAP 16	REFCAP4
	2 DVDD_MEM	SWDCLK 30	TP54
VBRGP	15 VBRGP	SWDIO 31	TP55
VBRGN	14 VBRGN	SCL 36	
VINPP	18 VINPP	SDA 33	
VINPN	17 VINPN	CSN 29	R231 22 PS_EN_4
	21 VINTP	SCK 28	R233 22 SPI_B_CLK
	22 VINTN	MISO_TX 35	R235 22 SPI_B_MISO
TP57	19 TIP_VEXTP	MOSI_RX 34	R236 22 SPI_B_MOSI
TP58	20 TIN_VEXTN	TOPDIG 24	
	6 DACCAP	TONDIG 25	
	12 FBP	VOUT 8	
	27 GPIO_1_TIPDIG	TOP_TON 7	
	26 GPIO_2_TINDIG	COMP 13	
		FBN 11	
		AVSS 23	
		DVSS 32	
		GND 10	
		PAD 37	

PGA900ARHHR

TP50 TP51 TP52 TP53

VBRGP VBRGN VINPP VINPN

R232 10k R234 10k

C203 50V 100nF C204 50V 100nF PSGND4 PSGND4

R237

C207 50V 100nF PSGND4

AFE_AVDD4 R230 47.5k TP93

R238 110 TP56

C205 560pF 16V C206 50V 100nF PSGND4

PSGND4 PSGND4 PSGND4 PSGND4

5V0_VDD4 C208 50V 100nF PSGND4

AFE_AVDD4 C209 50V 100nF PSGND4

AFE_DVDD4 C210 50V 100nF PSGND4

REFCAP4 C211 50V 100nF PSGND4


The FBP pin is not used in voltage mode.


Supply voltage = +3.3 V to 30 V
Current Supply = 2.6 mA
Ambient temperature range: : –40°C to +150°C

fSCK 1 MHz (MAX)


Title	MOTORCONTROLLER		Droid Technologies
Size: A4	Number: DT10965	Revision: 1.0	
Date: 14.07.2025	Time: 12:30:27	Sheet 16 of 22	

CALENDAR

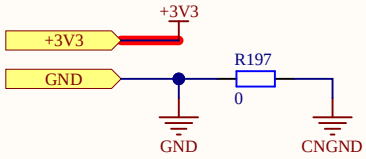




I2C Adresses 0x00 to 0x0F, 0xA2, 0xA3 (Datasheet page 8)

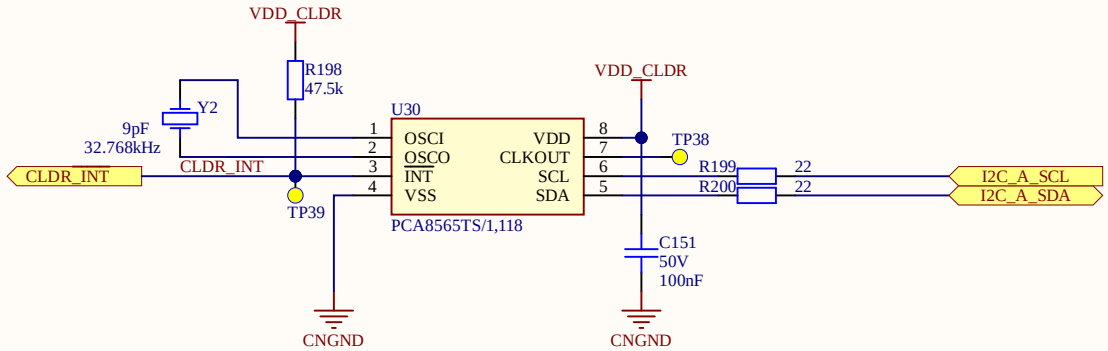



Supply voltage = : 0.9 V to 5.5 V
Current Supply = 820 µA
Ambient temperature range: : –40°C to +150°C

Title **MOTORCONTROLLER**			*Droid Technologies*
Size: A4	Number: DT10965	Revision: 1.0	
Date: 14.07.2025	Time: 12:30:27	Sheet 18 of 22	

USB INTERFACE

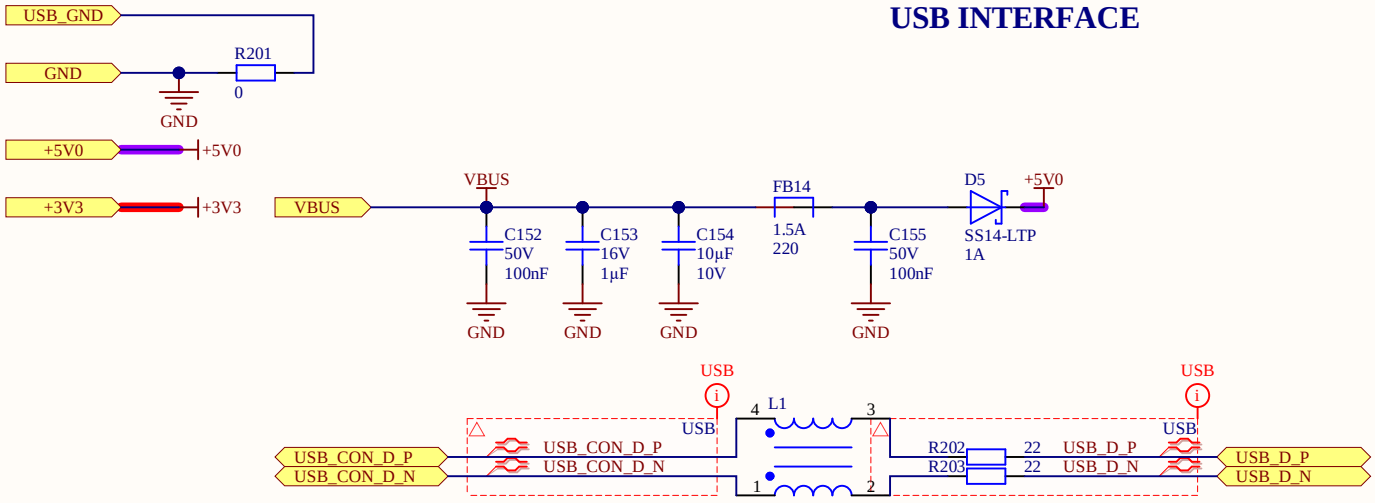

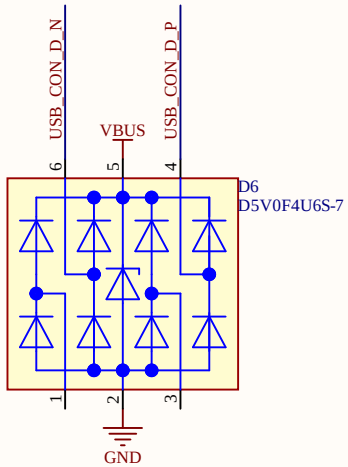

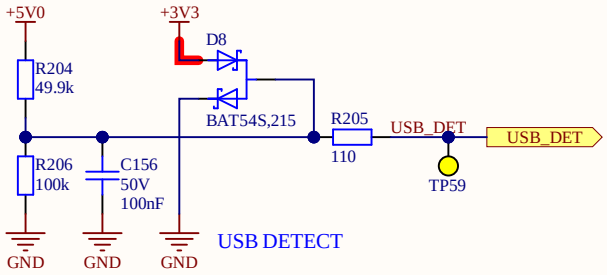

Any pin that has digital input and output functionality can potentially be used to monitor V_{Bus}, but the use of an interrupt-capable GPIO is recommended. A pin that does not have external interrupt capability can also be used, but the input state of the pin must be polled periodically by the application software to make sure appropriate action is taken whenever V_{Bus} is applied or removed. If an interrupt-capable GPIO is chosen, the GPIO can be configured to generate an interrupt on both the rising and falling edge. More information on external interrupts can be found in the *System Control and Interrupts* chapter. Example code that implements V_{Bus} monitoring using external interrupts and takes the appropriate actions is documented in the USB Software Guide and can be found in the associated USB software package.





Figure 22-2. USB Scheme

Title	***MOTORCONTROLLER***		*Droid Technologies*
Size: A4	Number: DT10965	Revision: 1.0	
Date: 14.07.2025	Time: 12:30:27	Sheet 19 of 22	

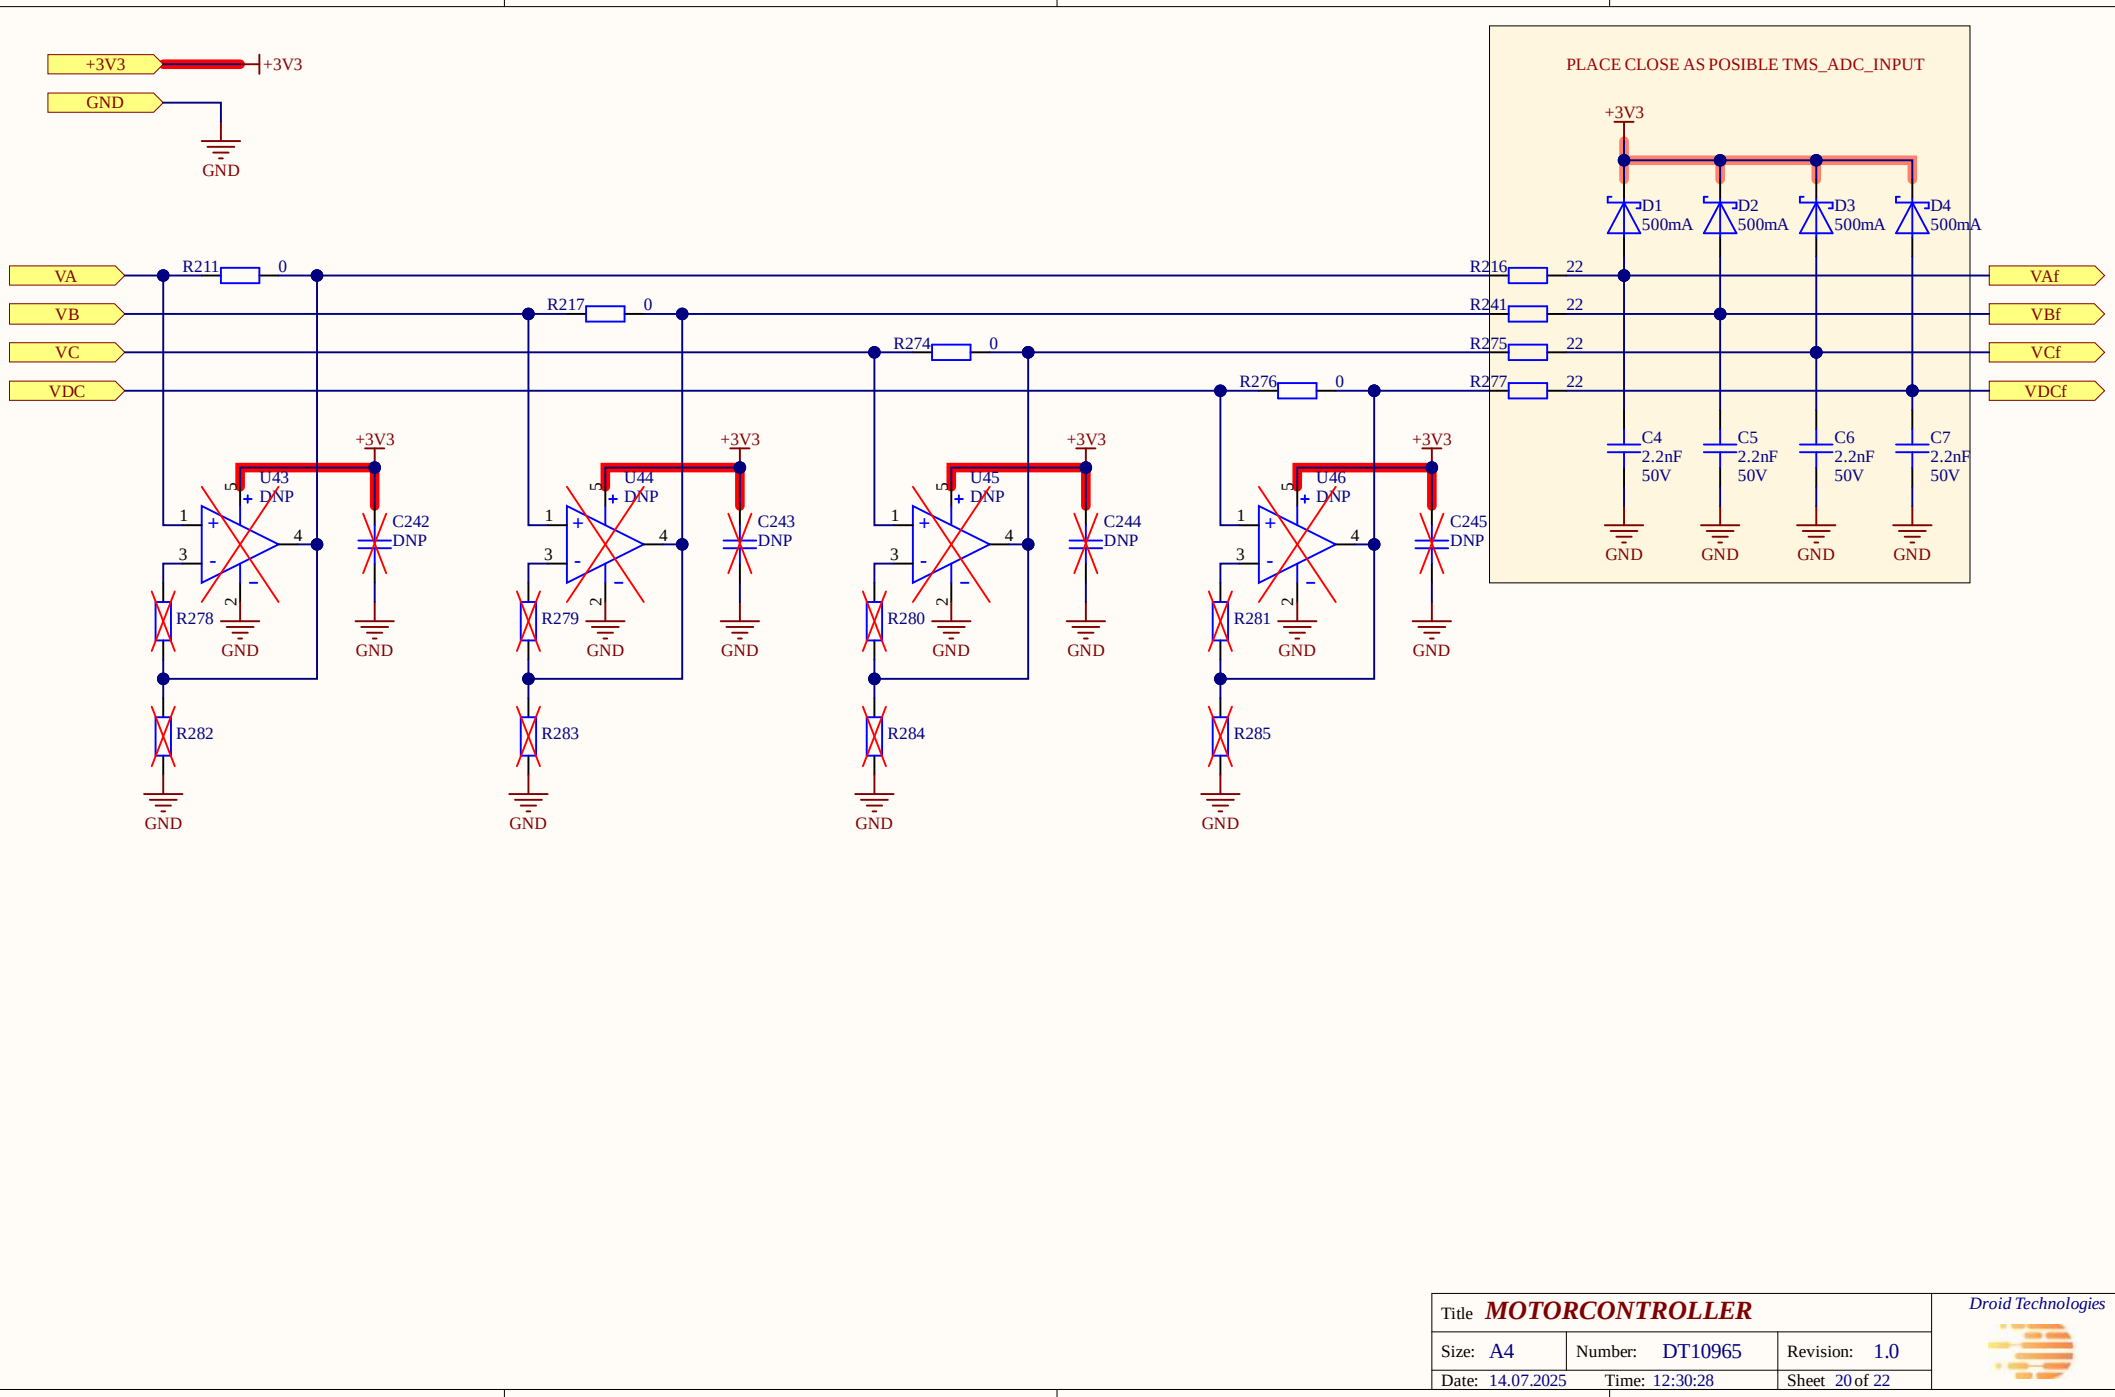


Title	***MOTORCONTROLLER***		*Droid Technologies*
Size: A4	Number: DT10965	Revision: 1.0	
Date: 14.07.2025	Time: 12:30:28	Sheet 20 of 22	

J2 Wiring connection scheme

AWG 20 wires				
Contact #	Color	Signal	External equipment	PCB connection
1	Black	GND	Battery	X32
2	Brown	n.a.	n.a.	n.a.
3	Red	Vin	Battery	X31
4	Orange	n.a.	n.a.	n.a.
5	Yellow	n.a.	n.a.	n.a.

AWG 26 wires				
Contact #	Color	Signal	External equipment	PCB connection
6		VBRGP1	Pressure sensor1	X11
7		VBRGN1	Pressure sensor1	X12
8	Red	VINPP1	Pressure sensor1	X13
9	Orange	VINPN1	Pressure sensor1	X14
10	Yellow	VBRGP2	Pressure sensor2	X15
11	Green	VBRGN2	Pressure sensor2	X16
12	Blue	VINPP2	Pressure sensor2	X17
13		VINPN2	Pressure sensor2	X18
14	Gray	VBRGP3	Pressure sensor3	X19
15	White	VBRGN3	Pressure sensor3	X20
16		VINPP3	Pressure sensor3	X21
17		VINPN3	Pressure sensor3	X22
18	Red	VBRGP4	Pressure sensor4	X23
19	Orange	VBRGN4	Pressure sensor4	X24
20	Yellow	VINPP4	Pressure sensor4	X25
21	Green	VINPN4	Pressure sensor4	X26
22	Blue	VBRGP5	Pressure sensor5	X27
23		VBRGN5	Pressure sensor5	X28
24	Gray	VINPP5	Pressure sensor5	X29
25	White	VINPN5	Pressure sensor5	X30

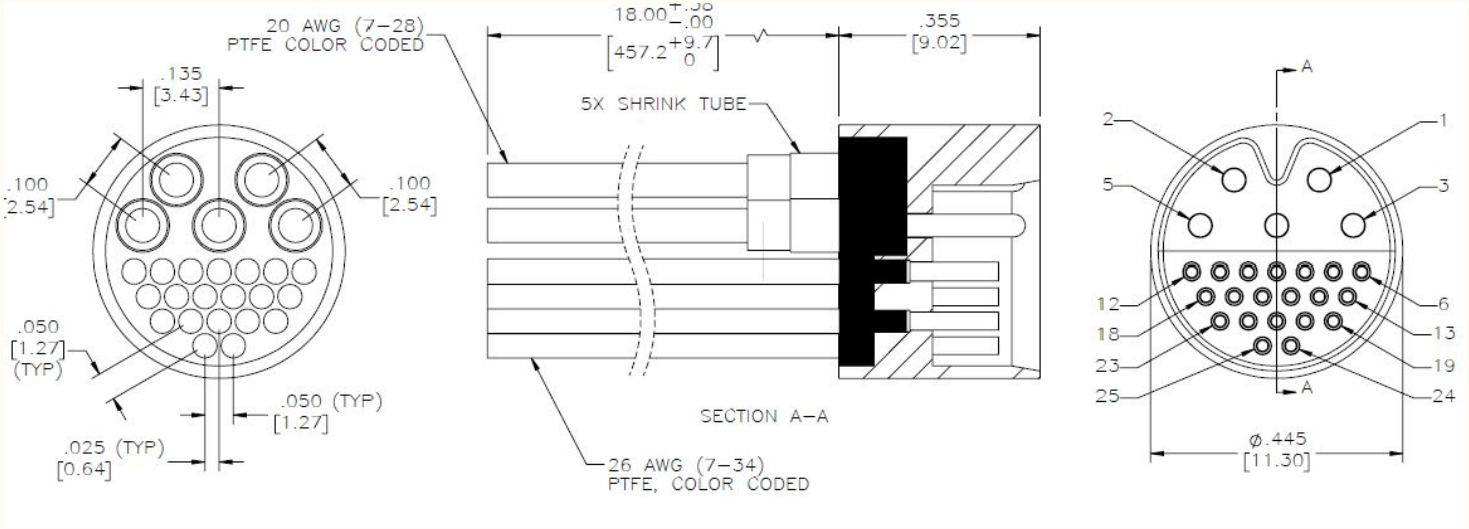


Title	MOTORCONTROLLER		Droid Technologies
Size: A4	Number: DT10965	Revision: 1.0	
Date: 14.07.2025	Time: 12:30:28	Sheet 21 of 22	

J3 Wiring connection scheme

AWG 20 wires				
Contact #	Color	Signal	External equipment	PCB connection
1	Black	n.a.	n.a.	n.a
2	Brown	Winding 1	Motor	X33.
3	Red	n.a.	n.a.	n.a.
4	Orange	Winding 2	Motor	X34
5	Yellow	Winding 3	Motor	X35

AWG 26 wires				
Contact #	Color	Signal	External equipment	PCB connection
6		P1OUT	Resolver	X1
7		P2OUT	Resolver	X2
8	Red	S1P_IN	Resolver	X3
9	Orange	S1N_IN	Resolver	X4
10	Yellow	S2P_IN	Resolver	X5
11	Green	S2N_IN	Resolver	X6
12	Blue	n.a.	n.a.	n.a.
13		n.a.	n.a.	n.a.
14	Gray	n.a.	n.a.	n.a.
15	White	n.a.	n.a.	n.a.
16		USB_GND	USB	X10
17		n.a.	n.a.	n.a.
18	Red	VBUS	USB	X9
19	Orange	USB_CON_D_P	USB	X7
20	Yellow	USB_CON_D_N	USB	X8
21	Green	n.a.	n.a.	n.a.
22	Blue	n.a.	n.a.	n.a.
23		n.a.	n.a.	n.a.
24	Gray	n.a.	n.a.	n.a.
25	White	n.a.	n.a.	n.a.

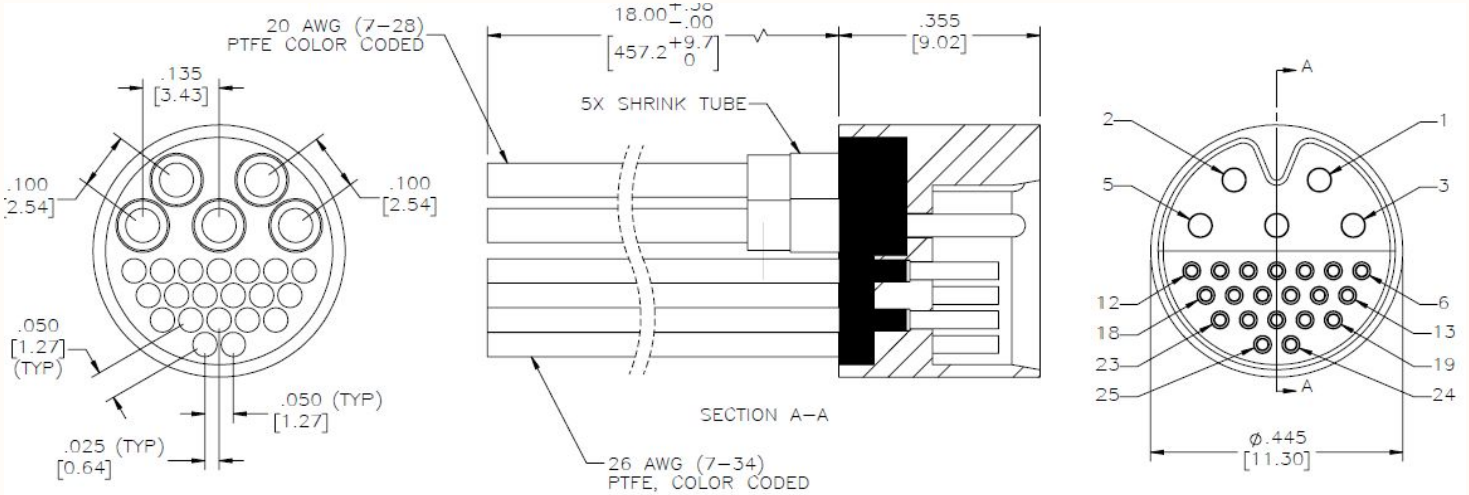

Title	***MOTORCONTROLLER***		*Droid Technologies*
Size: A4	Number: DT10965	Revision: 1.0	
Date: 14.07.2025	Time: 12:30:28	Sheet 22 of 22	

PGA900 AFE Reserved 2

+5V0 +5V0
GND GND
R264 0 GND PSGND5

+5V0 FB19 1.5A 220 5V0_VDD5 C232 50V 100nF PSGND5

TP81 TP82 TP83 TP84
VBRGP
VBRGN
VINPP R267 10k
VINPN R269 10k
C233 50V 100nF PSGND5
C234 50V 100nF PSGND5

5V0_VDD5 C238 50V 100nF PSGND5
AFE_AVDD5 C239 50V 100nF PSGND5
AFE_DVDD5 C240 50V 100nF PSGND5

REFCAP5 C241 50V 100nF PSGND5

U42

5V0_VDD5	5 VDD	GATE 4	PSGND5
AFE_AVDD5	9 AVDD	VP_OTP 1	TP80
AFE_DVDD5	3 DVDD	REFCAP 16	REFCAP5
	2 DVDD_MEM	SWDCLK 30	TP85
	15 VBRGP	SWDIO 31	TP86
	14 VBRGN	SCL 36	
	18 VINPP	SDA 33	
	17 VINPN	CSN 29	
	21 VINTP	SCK 28	
	22 VINTN	MISO_TX 35	
	19 TIP_VEXTP	MOSI_RX 34	
	20 TIN_VEXTN	TOPDIG 24	
	6 DACCAP	TONDIG 25	
	12 FBP	VOUT 8	
	27 GPIO_1_TIPDIG	TOP_TON 7	
	26 GPIO_2_TINDIG	COMP 13	
		FBN 11	
		AVSS 23	
		DVSS 32	
		GND 10	
		PAD 37	

PGA900ARHHR

R272
TP88
TP89
C237 50V 100nF PSGND5

AFE_AVDD5 R265 47.5k
R266 22 PS_EN_5
R268 22 SPI_B_CLK
R270 22 SPI_B_MISO
R271 22 SPI_B_MOSI
TP96
R273 110
C235 560pF 16V
C236 50V 100nF PSGND5
TP87

PSGND5 PSGND5 PSGND5 PSGND5

When Gate Drive is not being used, the GATE pin must be connected to GND and gate control must be disabled by setting

To program the OTP memory, an external VP_OTP voltage needs to be applied to the VP_OTP pin.

The FBP pin is not used in voltage mode.

Supply voltage = +3.3 V to 30 V
Current Supply = 2.6 mA
Ambient temperature range: : –40°C to +150°C

fSCK 1 MHz (MAX)

Title	MOTORCONTROLLER		Droid Technologies
Size: A4	Number: DT10965	Revision: 1.0	
Date: 14.07.2025	Time: 12:30:28	Sheet * of *	

Pressure sensor AFE 2

+5V0 +5V0
GND
GND
GND
R244
0
PSGND2

+5V0
FB17
1.5A
220
5V0_VDD2
C212
50V
100nF
PSGND2

When Gate Drive is not being used, the GATE pin must be connected to GND and gate control must be disabled by setting

To program the OTP memory, an external VP_OTP voltage needs to be applied to the VP_OTP pin.

U40

5V0_VDD2 5 VDD
AFE_AVDD1 9 AVDD
AFE_DVDD2 3 DVDD
2 DVDD_MEM
15 VBRGP
14 VBRGN
18 VINPP
17 VINPN
21 VINTP
22 VINTN
19 TIP_VEXTP
20 TIN_VEXTN
6 DACCAP
12 FBP
27 GPIO_1_TIPDIG
26 GPIO_2_TINDIG

4 GATE
1 VP_OTP
16 REFCAP
30 SWDCLK
31 SWDIO
36 SCL
33 SDA
29 CSN
28 SCK
35 MISO_TX
34 MOSI_RX
24 TOPDIG
25 TONDIG
8 VOUT
7 TOP_TON
13 COMP
11 FBN
23 AVSS
32 DVSS
10 GND
37 PAD

PGA900ARHHR

TP61 TP62 TP63 TP64
VBRGP
VBRGN
VINPP
VINPN
R247 10k
R249 10k
C213 50V 100nF
C214 50V 100nF
PSGND2 PSGND2

R252
TP68
TP69
C217 50V 100nF
PSGND2

TP65 TP66
AFE_AVDD1
R245 47.5k
R246 22
R248 22
TP94
PS_EN_2
SPI_B_CLK
R250 22
R251 22
SPI_B_MISO
SPI_B_MOSI
R253 110
C215 560pF 16V
C216 50V 100nF
TP67
PSGND2

PSGND2 PSGND2 PSGND2 PSGND2

5V0_VDD2 C218 50V 100nF PSGND2
AFE_AVDD1 C219 50V 100nF PSGND2
AFE_DVDD2 C220 50V 100nF PSGND2

REFCAP2
C221 50V 100nF
PSGND2

The FBP pin is not used in voltage mode.

Supply voltage = +3.3 V to 30 V
Current Supply = 2.6 mA
Ambient temperature range: : –40°C to +150°C

fSCK 1 MHz (MAX)

Title **MOTORCONTROLLER**			*Droid Technologies*
Size: A4	Number: DT10965	Revision: 1.0	
Date: 14.07.2025	Time: 12:30:28	Sheet * of *	

Pressure sensor AFE 3

+5V0 +5V0
GND
GND
R254
0
GND
PSGND3

+5V0
FB18
1.5A
220
5V0_VDD3
C222
50V
100nF
PSGND3

When Gate Drive is not being used, the GATE pin must be connected to GND and gate control must be disabled by setting

To program the OTP memory, an external VP_OTP voltage needs to be applied to the VP_OTP pin.

U41

5V0_VDD3 5 VDD
AFE_AVDD3 9 AVDD
AFE_DVDD3 3 DVDD
2 DVDD_MEM
15 VBRGP
14 VBRGN
18 VINPP
17 VINPN
21 VINTP
22 VINTN
19 TIP_VEXTP
20 TIN_VEXTN
6 DACCAP
12 FBP
27 GPIO_1_TIPDIG
26 GPIO_2_TINDIG

4 GATE
1 VP_OTP
16 REFCAP
30 SWDCLK
31 SWDIO
36 SCL
33 SDA
29 CSN
28 SCK
35 MISO_TX
34 MOSI_RX
24 TOPDIG
25 TONDIG
8 VOUT
7 TOP_TON
13 COMP
11 FBN
23 AVSS
32 DVSS
10 GND
37 PAD

PGA900ARHHR

TP71 TP72 TP73 TP74
VBRGP
VBRGN
VINPP
VINPN
R257 10k
R259 10k
C223 50V 100nF
C224 50V 100nF
PSGND3 PSGND3

R262
TP78
TP79
C227 50V 100nF
PSGND3

PSGND3
TP70
REFCAP3
TP75 TP76
AFE_AVDD3
R255 47.5k
R256 22
R258 22
PS_EN_3
SPI_B_CLK
R260 22
R261 22
SPI_B_MISO
SPI_B_MOSI
TP95
R263 110
C225 560pF 16V
C226 50V 100nF
TP77
PSGND3

PSGND3 PSGND3 PSGND3 PSGND3

The FBP pin is not used in voltage mode.

Supply voltage = +3.3 V to 30 V
Current Supply = 2.6 mA
Ambient temperature range: : –40°C to +150°C

fSCK 1 MHz (MAX)

5V0_VDD3 C228 50V 100nF PSGND3
AFE_AVDD3 C229 50V 100nF PSGND3
AFE_DVDD3 C230 50V 100nF PSGND3

REFCAP3
C231 50V 100nF
PSGND3

Title	MOTORCONTROLLER		Droid Technologies
Size: A4	Number: DT10965	Revision: 1.0	
Date: 14.07.2025	Time: 12:30:28	Sheet * of *	