


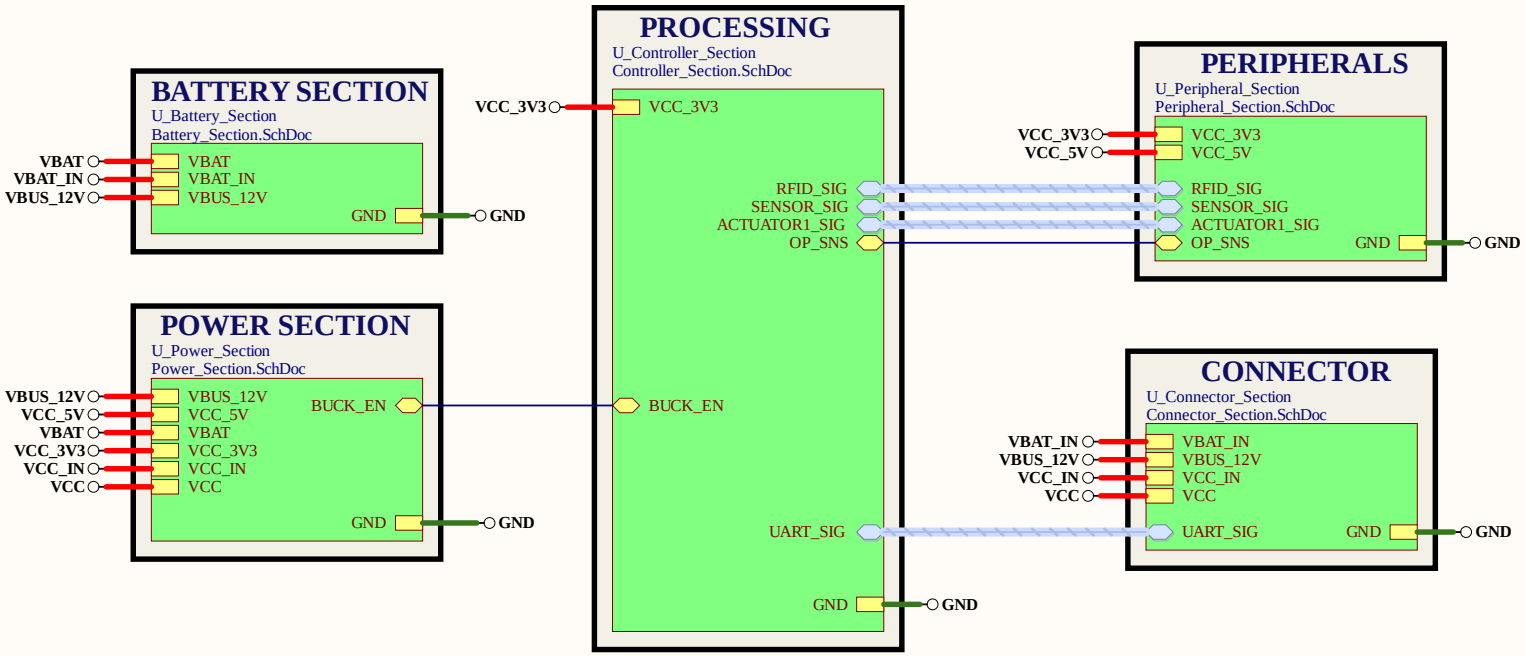


Cannot open file C:\Users\user\Pictures\Saved Pictures\espark-consulting-group-150x150.jpg	Title: Francisco Gimenez.PrjPCB		
	Size: A4	Number: 1	Revision: 1
	Date: 2/08/2022	Sheet 1 of 13	
	File: D:\Github\..\Top_Sheet.SchDoc	Drawn By: Huzaifa Ali	

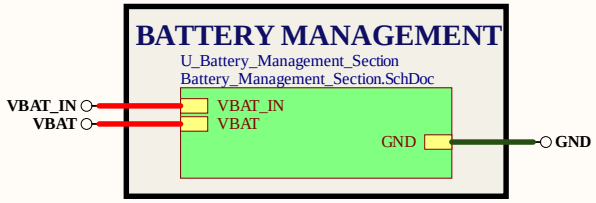


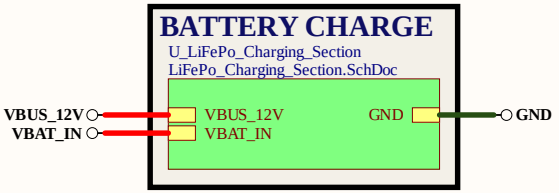




Cannot open file C:\Users\user\Pictures\Saved Pictures\espark-consulting-group-150x150.jpg	Title: Francisco Gimenez.PrjPCB		
	Size: A4	Number: 1	Revision: 1
	Date: 2/08/2022	Sheet 2 of 13	
	File: D:\Github\..\Battery_Section.SchDoc	Drawn By: Huzaifa Ali	

DECOUPLING CAPACITOR

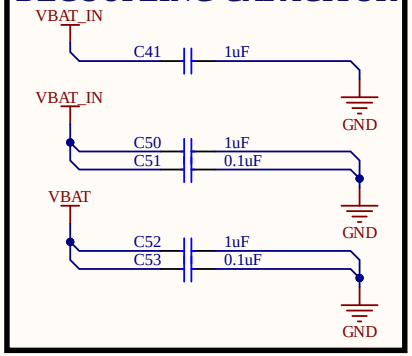


BATTERY SUPERVISORY CIRCUIT

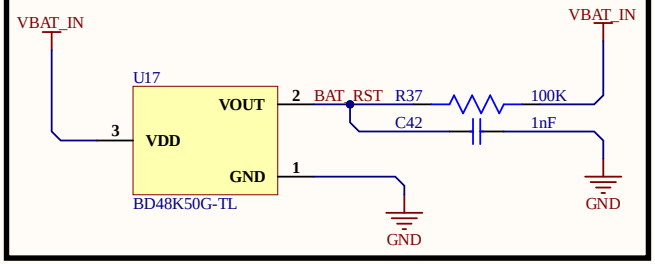


Detection voltage: 2.3V to 6.0V (Typ.)
Voltage threshold: 5V


PULL UP RESISTOR



POWER SWITCH IC

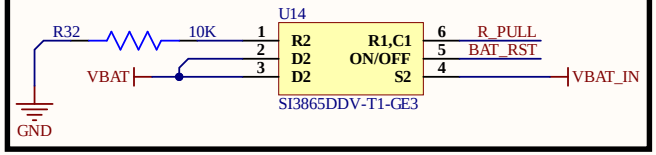


POWER NETS




Cannot open file C:\Users\user\Pictures\Saved Pictures\espark-consulting-group-150x150.jpg	Title: Francisco Gimenez.PrjPCB		
	Size: A4	Number: 1	Revision: 1
	Date: 2/08/2022	Sheet 3 of 13	
	File: D:\Github\..\Battery_Management_Section.SchDoc	Drawn By: Huzaifa Ali	


DECOUPLING CAPACITORS

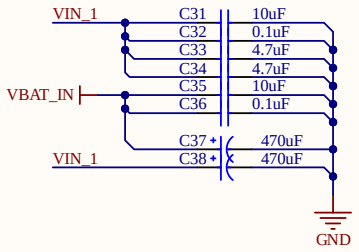


BATTERY CHARGING CIRCUIT

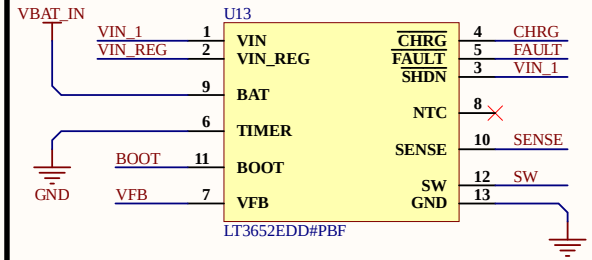

SUPPORTING CIRCUITRY

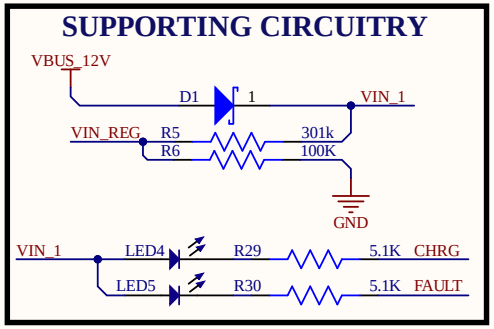


BATTERY INPUT CIRCUIT

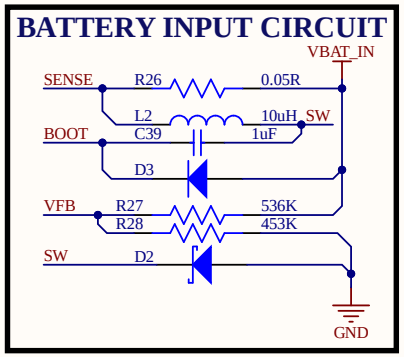


Battery Chemistry: 2 Cell LiFeOP4
Input Voltage: 12V USB
Battery Voltage: (2 × 3.6V) = 7.2V
Charge current: 2A

POWER NETS




Cannot open file C:\Users\user\Pictures\Saved Pictures\espark-consulting-group-150x150.jpg	Title: Francisco Gimenez.PrjPCB		
	Size: A4	Number: 1	Revision: 1
	Date: 2/08/2022	Sheet 4 of 13	
	File: D:\Github\..\LiFePo_Charging_Section.SchDoc	Drawn By: Huzaifa Ali	

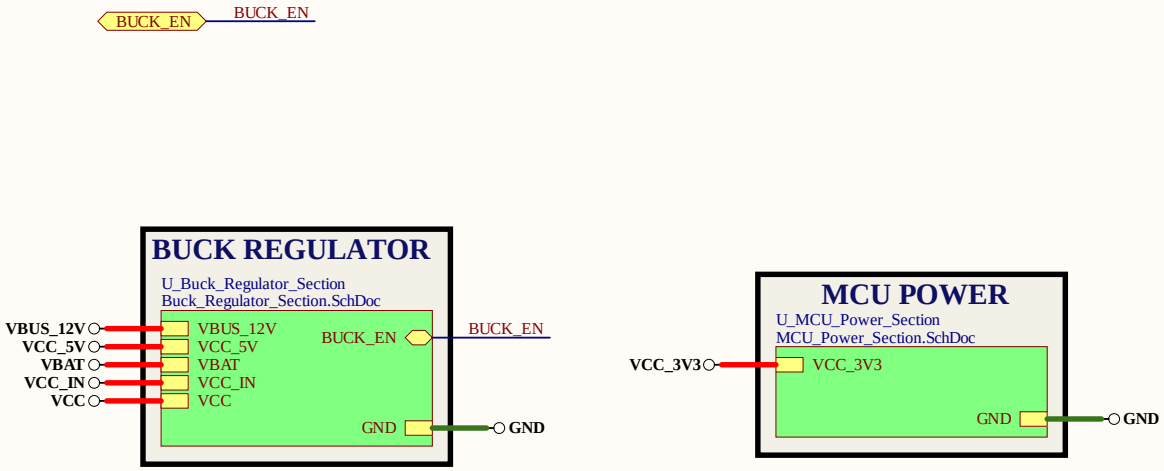


Cannot open file C:\Users\user\Pictures\Saved Pictures\espark-consulting-group-150x150.jpg	Title: Francisco Gimenez.PrjPCB		
	Size: A4	Number: 1	Revision: 1
	Date: 2/08/2022	Sheet 5 of 13	
	File: D:\Github\..\Power_Section.SchDoc	Drawn By: Huzaifa Ali	

DECOUPLING CAPACITOR



3V3 REGULATOR




Input Voltage: 12V USB or 7.2V VBAT
Output Current: 1A
Output Voltage: Fixed 3.3V
Voltage Drop: 500 mV max. at 1 A load

- Calculator value for current limiting Resistance: 480R for 20mA @VCC=12V


- Closest standard value=470R

LED max current rating=30mA (Datasheet =pg:3)
LED test current= 20mA (pg:5)

POWER INDICATION LED

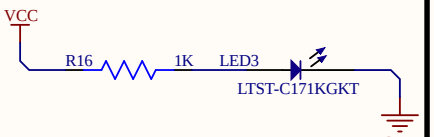

POWER NETS




Cannot open file C:\Users\user\Pictures\Saved Pictures\espark-consulting-group-150x150.jpg	Title: Francisco Gimenez.PrjPCB		
	Size: A4	Number: 1	Revision: 1
	Date: 2/08/2022	Sheet 6 of 13	
	File: D:\Github\..\MCU_Power_Section.SchDoc	Drawn By: Huzaifa Ali	


BUCK ENABLE




SUPPORTING CIRCUITRY

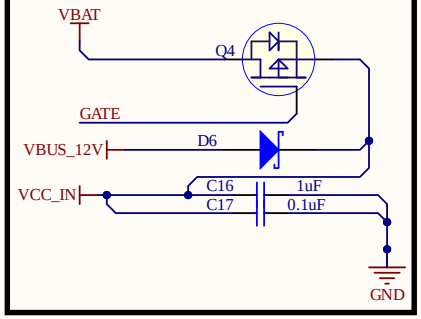


OR CONTROLLER SECTION

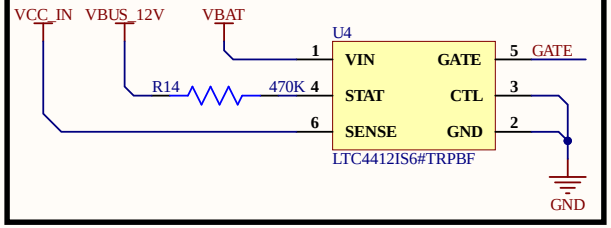

DECOUPLING CAPACITOR

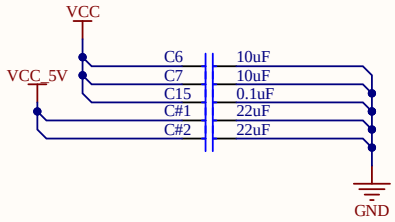

BUCK SWITCHING REGULATOR CIRCUIT

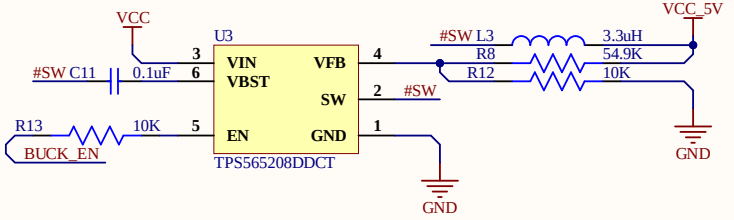


3.3uH inductor and output decoupling capacitor missing in the current design. (pg: 1,14.... datasheet)

- Input Voltage: switches between 12V USB and VBAT (7.2V)
- Output Voltage: 5V
- Output Current: 5A Maximum.


Output Voltage Calculation:


Formula: V =0.760 (1+R1/R2) (pg:13)
R1= 54.9K, R2=10K, L=3.3uH (pg:14)
VOUT= 4.93V
UVLO threshold: 3.6V (pg:5)


POWER NETS





Cannot open file C:\Users\user\Pictures\Saved Pictures\espark-consulting-group-150x150.jpg	Title: Francisco Gimenez.PrjPCB		
	Size: A4	Number: 1	Revision: 1
	Date: 2/08/2022	Sheet 7 of 13	
	File: D:\Github\..\Buck_Regulator_Section.SchDoc	Drawn By: Huzaifa Ali	



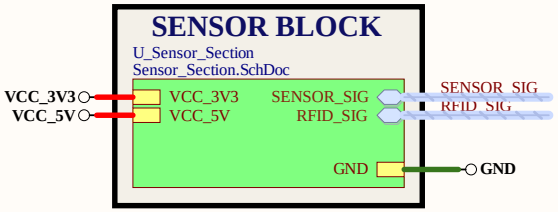

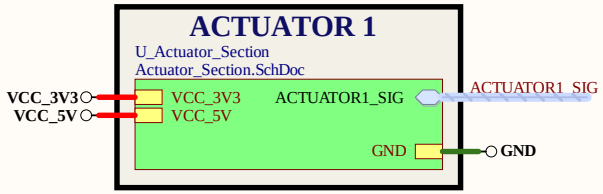


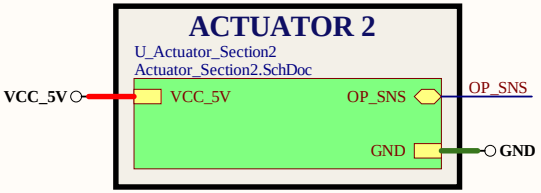




Cannot open file C:\Users\user\Pictures\Saved Pictures\espark-consulting-group-150x150.jpg	Title: Francisco Gimenez.PrjPCB		
	Size: A4	Number: 1	Revision: 1
	Date: 2/08/2022	Sheet 8 of 13	
	File: D:\Github\..\Peripheral_Section.SchDoc	Drawn By: Huzaifa Ali	


RFID INPUTS

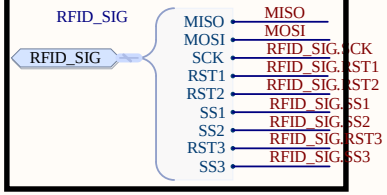


SENSOR SIGNAL

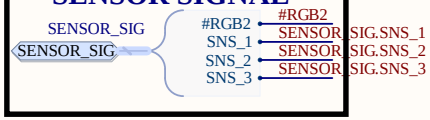


TEST POINTS




SENSOR INPUT

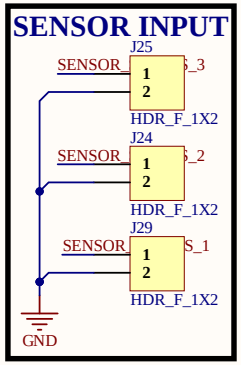

POWER NETS




BUFFER NON-INVERT

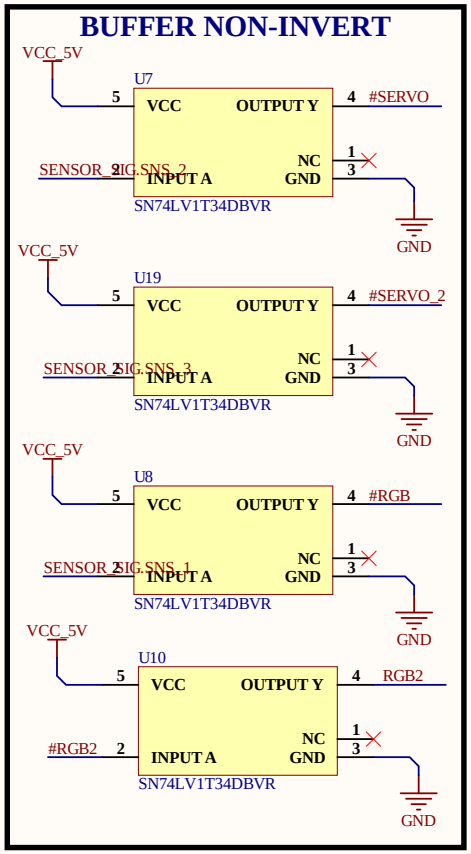


SNS signals are test signals for motor and RGB LED.


SERVO MOTOR

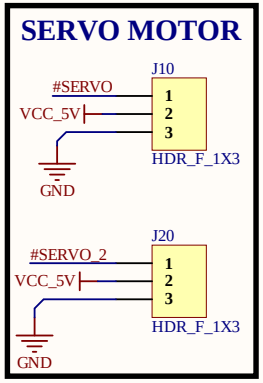


RGB LED

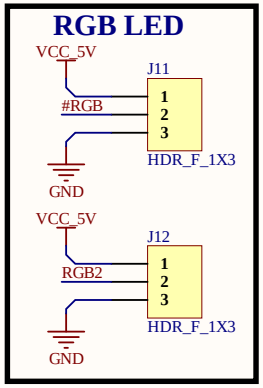

RFID CONNECTORS

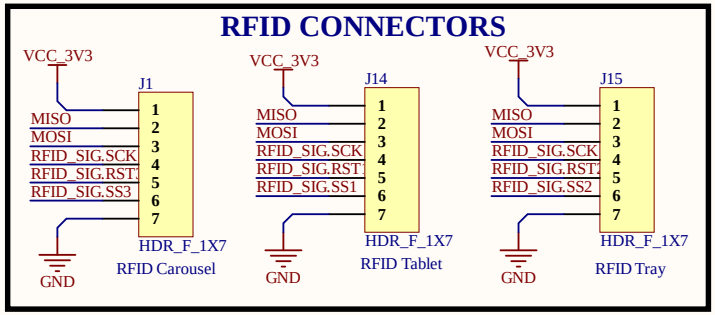

SPI INPUTS




Cannot open file C:\Users\user\Pictures\Saved Pictures\espark-consulting-group-150x150.jpg

Title	Francisco Gimenez.PrjPCB		
Size	Number		Revision
A4	1		1
Date:	2/08/2022	Sheet 9 of	13
File:	D:\Github\..\Sensor_Section.SchDoc	Drawn By:	Huzaifa Ali


ACTUATOR1 SIGNAL




LOAD CELL AMPLIFIER

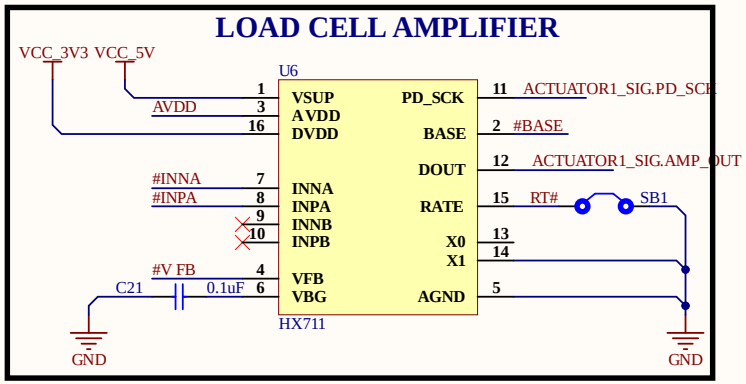


CONNECTORS



AMPLIFIER SUPPORTING CIRCUIT

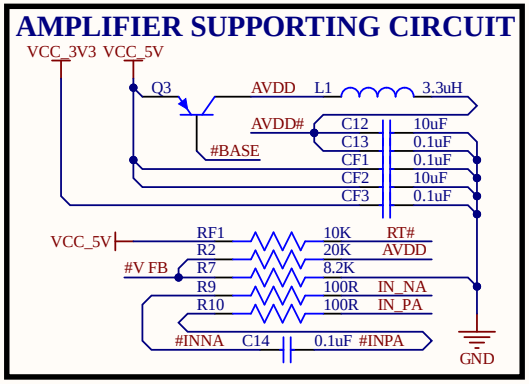

POWER NETS




Cannot open file C:\Users\user\Pictures\Saved Pictures\espark-consulting-group-150x150.jpg	Title: Francisco Gimenez.PrjPCB		
	Size: A4	Number: 1	Revision: 1
	Date: 2/08/2022	Sheet 10 of 13	
	File: D:\Github\..\Actuator_Section.SchDoc	Drawn By: Huzaifa Ali	

ACTUATOR2 SIGNAL

OP_SNS — OP_SNS

SENSOR INPUT CONNECTORS

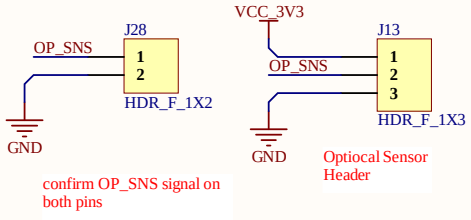


POWER NETS

VCC_5V — VCC_5V

GND — GND

Cannot open file C:\Users\user\Pictures\Saved Pictures\espark-consulting-group-150x150.jpg	Title: Francisco Gimenez.PrjPCB		
	Size: A4	Number: 1	Revision: 1
	Date: 2/08/2022	Sheet 1 bf 13	
	File: D:\Github\..\Actuator_Section2.SchDoc	Drawn By: Huzaifa Ali	


ACTUATOR SIGNALS




BUCK ENABLE




RFID INPUTS

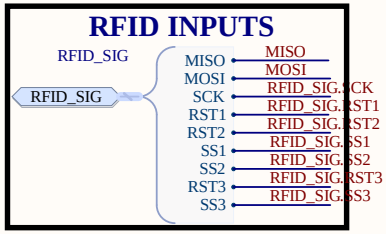

SENSOR SIGNAL

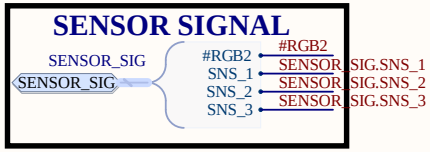


UART INPUTS

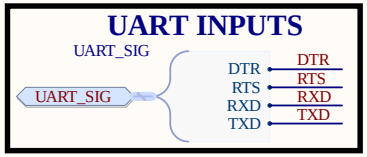


POWER NETS




ESP32-MODULE

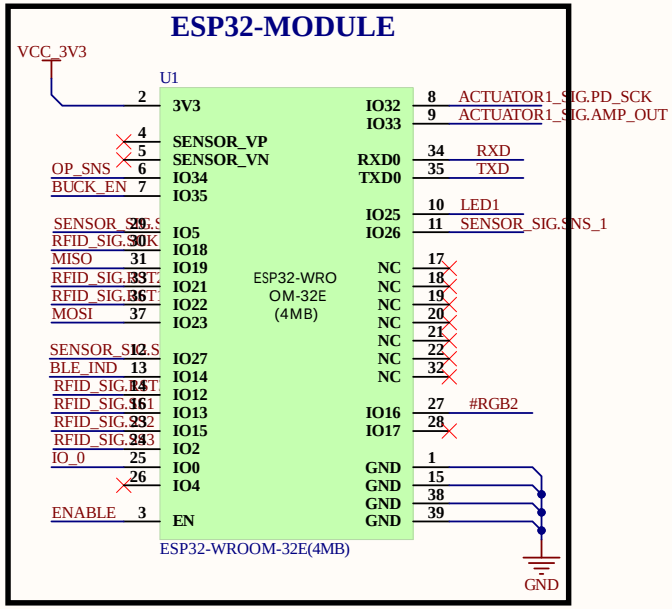


RESET SWITCH CIRCUITRY

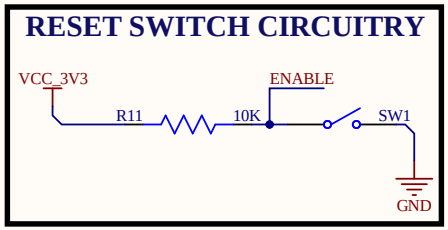


DECOUPLING CAPACITOR

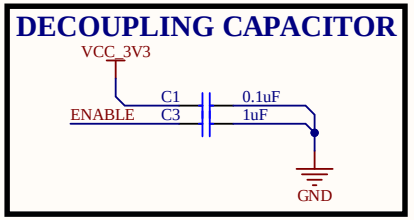

SUPPORTING CIRCUITRY

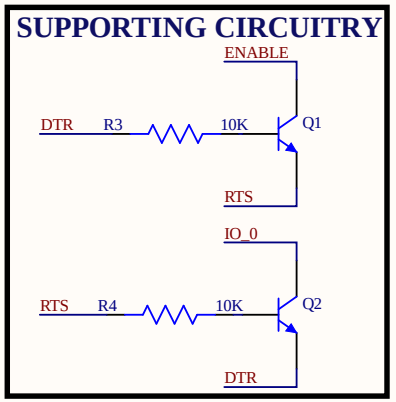

POWER INDICATION LED

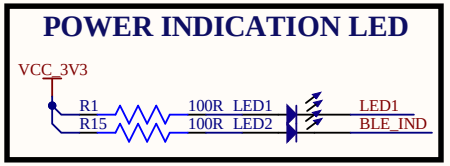

For BLue LED. forward voltage range is 2.6-3A. Taking. IF=5mA (datasheet pg: 4).
Value of current limiting RES=100R. ((3.3-2.8)/.005)


For Yellow LED, calculated resistor value is 105R.
Foward voltage: average of max and min forward voltage. IF=20mA (pg: 4)
Nearest standard value=100R

Cannot open file C:\Users\user\Pictures\Saved Pictures\espark-consulting-group-150x150.jpg	Title: Francisco Gimenez.PrjPCB		
	Size: A4	Number: 1	Revision: 1
	Date: 2/08/2022	Sheet 12 of 13	
	File: D:\Github\..\Controller_Section.SchDoc	Drawn By: Huzaifa Ali	


UART INPUTS




USB CONNECTOR

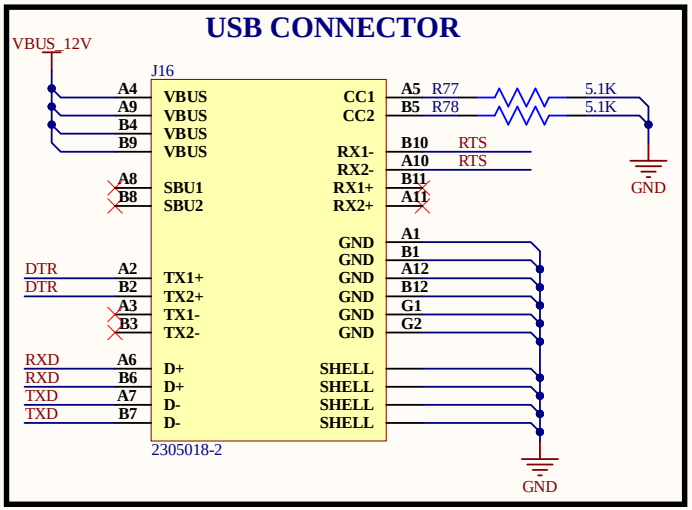


BATTERY IN



POWER SWITCH



POWER NETS



VCC and VCC_IN are externally short circuited via a jumper on the board. VCC_IN is the main power input from source selector IC.

Cannot open file C:\Users\user\Pictures\Saved Pictures\espark-consulting-group-150x150.jpg	Title: Francisco Gimenez.PrjPCB		
	Size: A4	Number: 1	Revision: 1
	Date: 2/08/2022	Sheet 13 of 13	
	File: D:\Github\..\Connector_Section.SchDoc	Drawn By: Huzaifa Ali	