


Nominal
Impedance
4Ω 6Ω 8Ω
Drok


Nominal
Impedance
4Ω 6Ω 8Ω
Drok






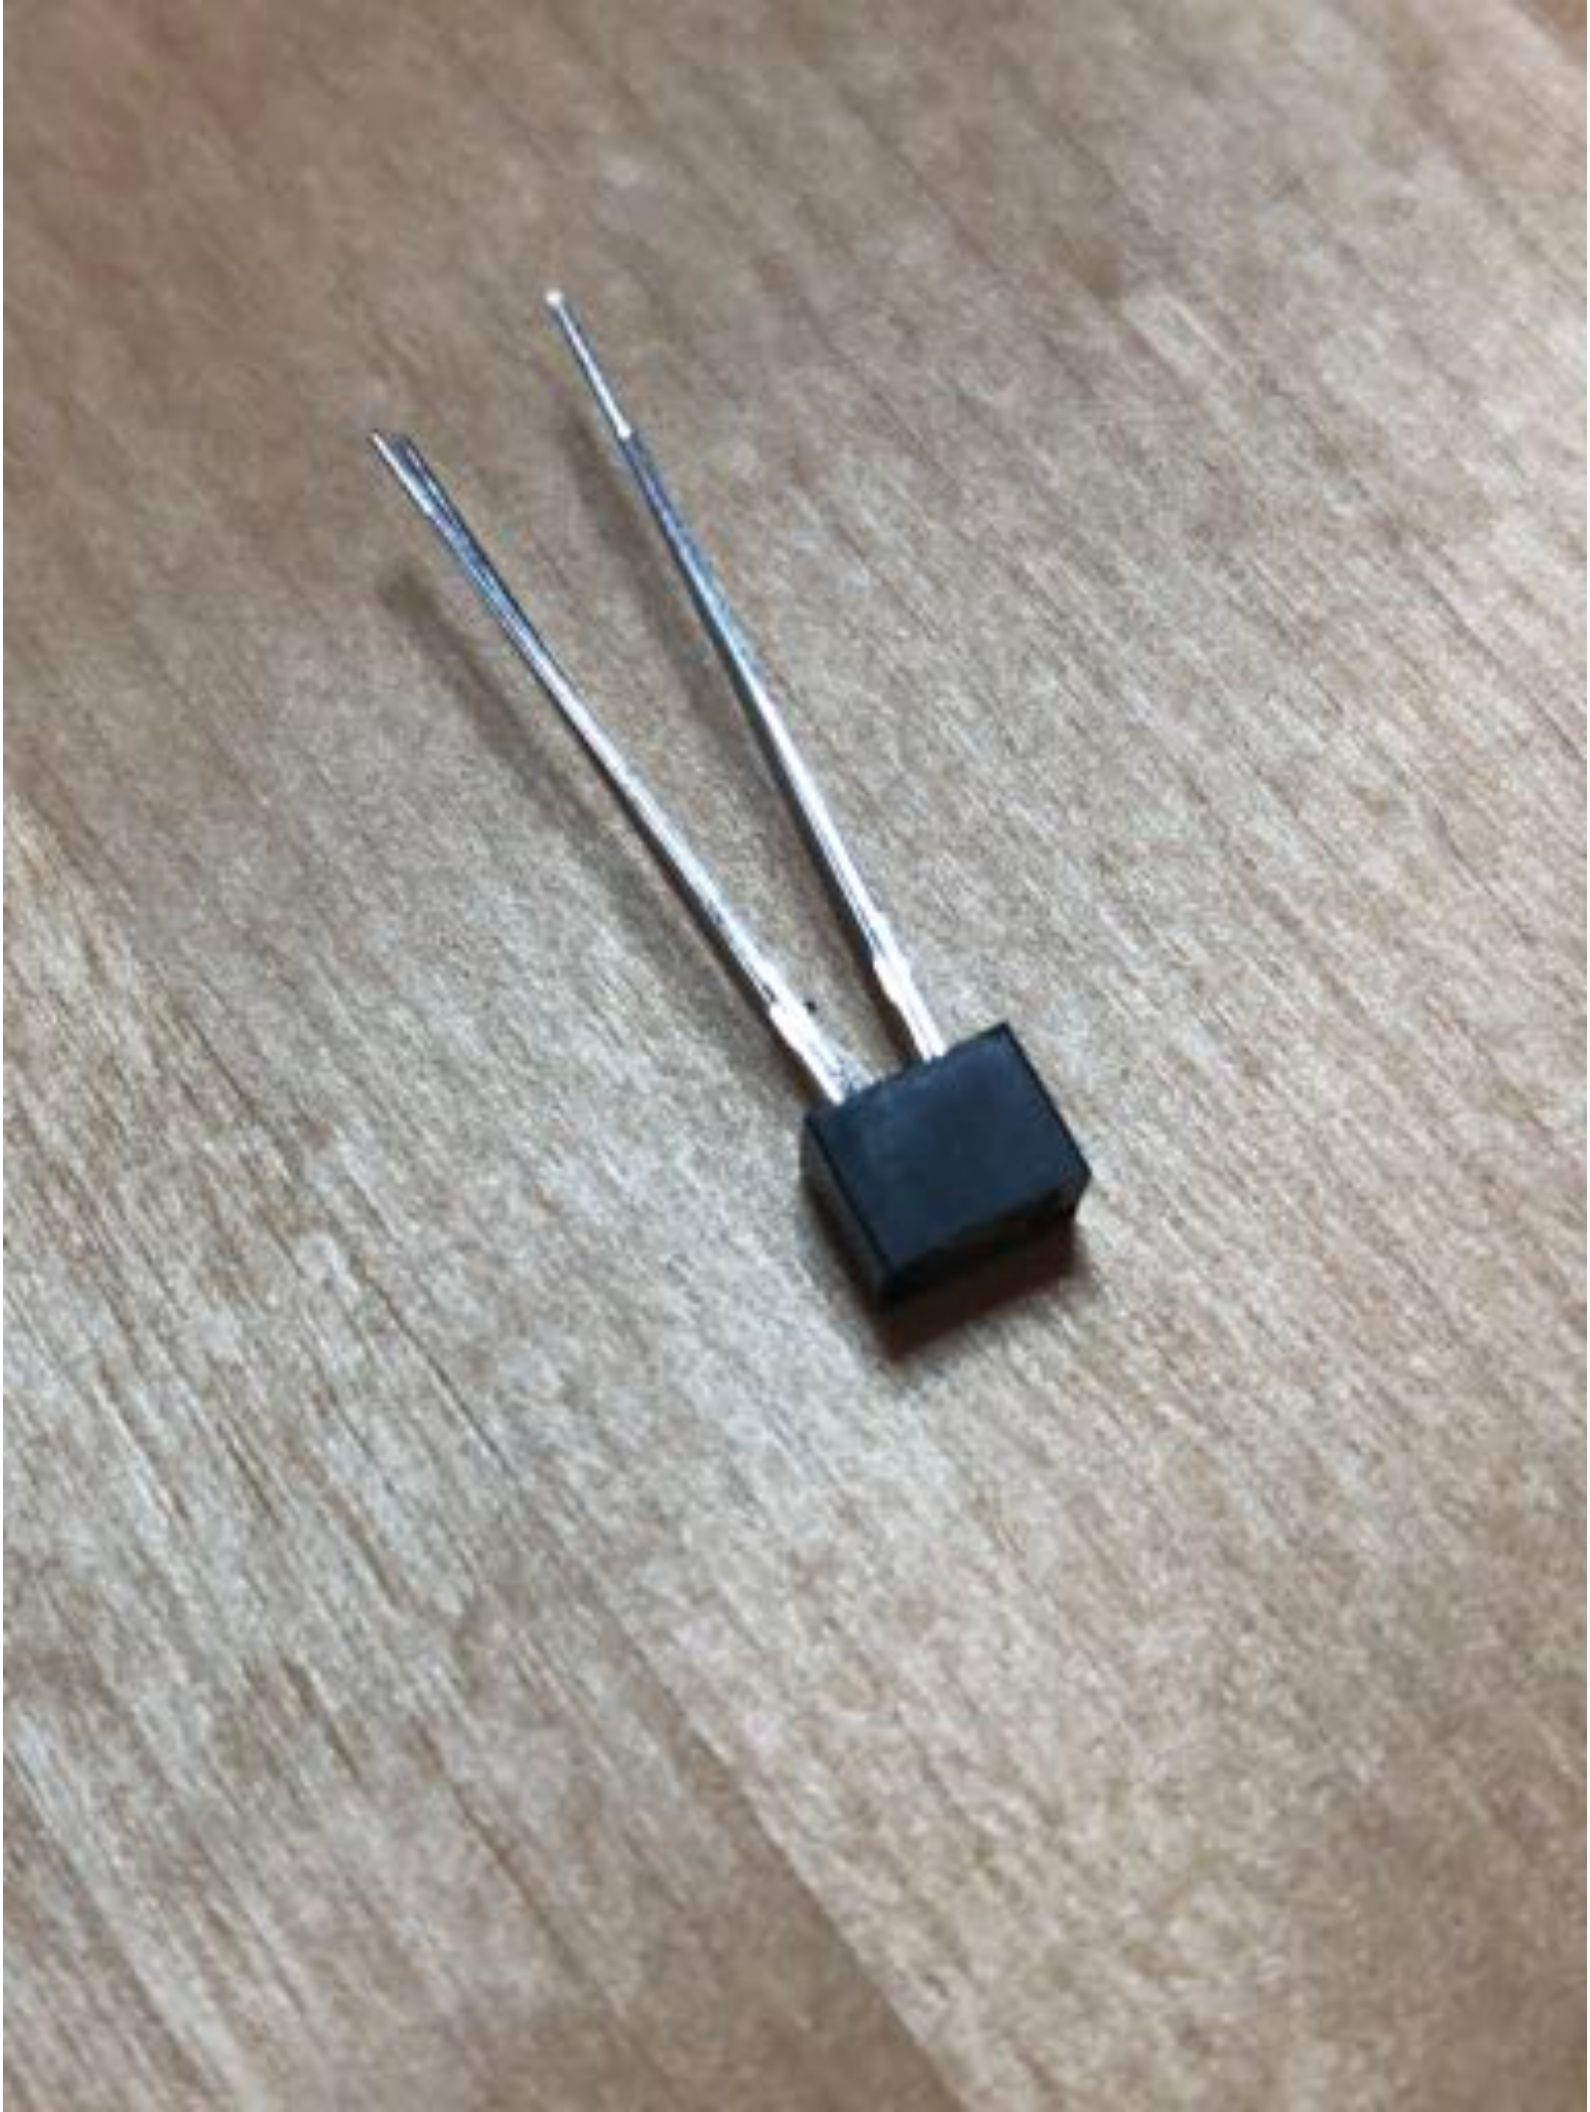

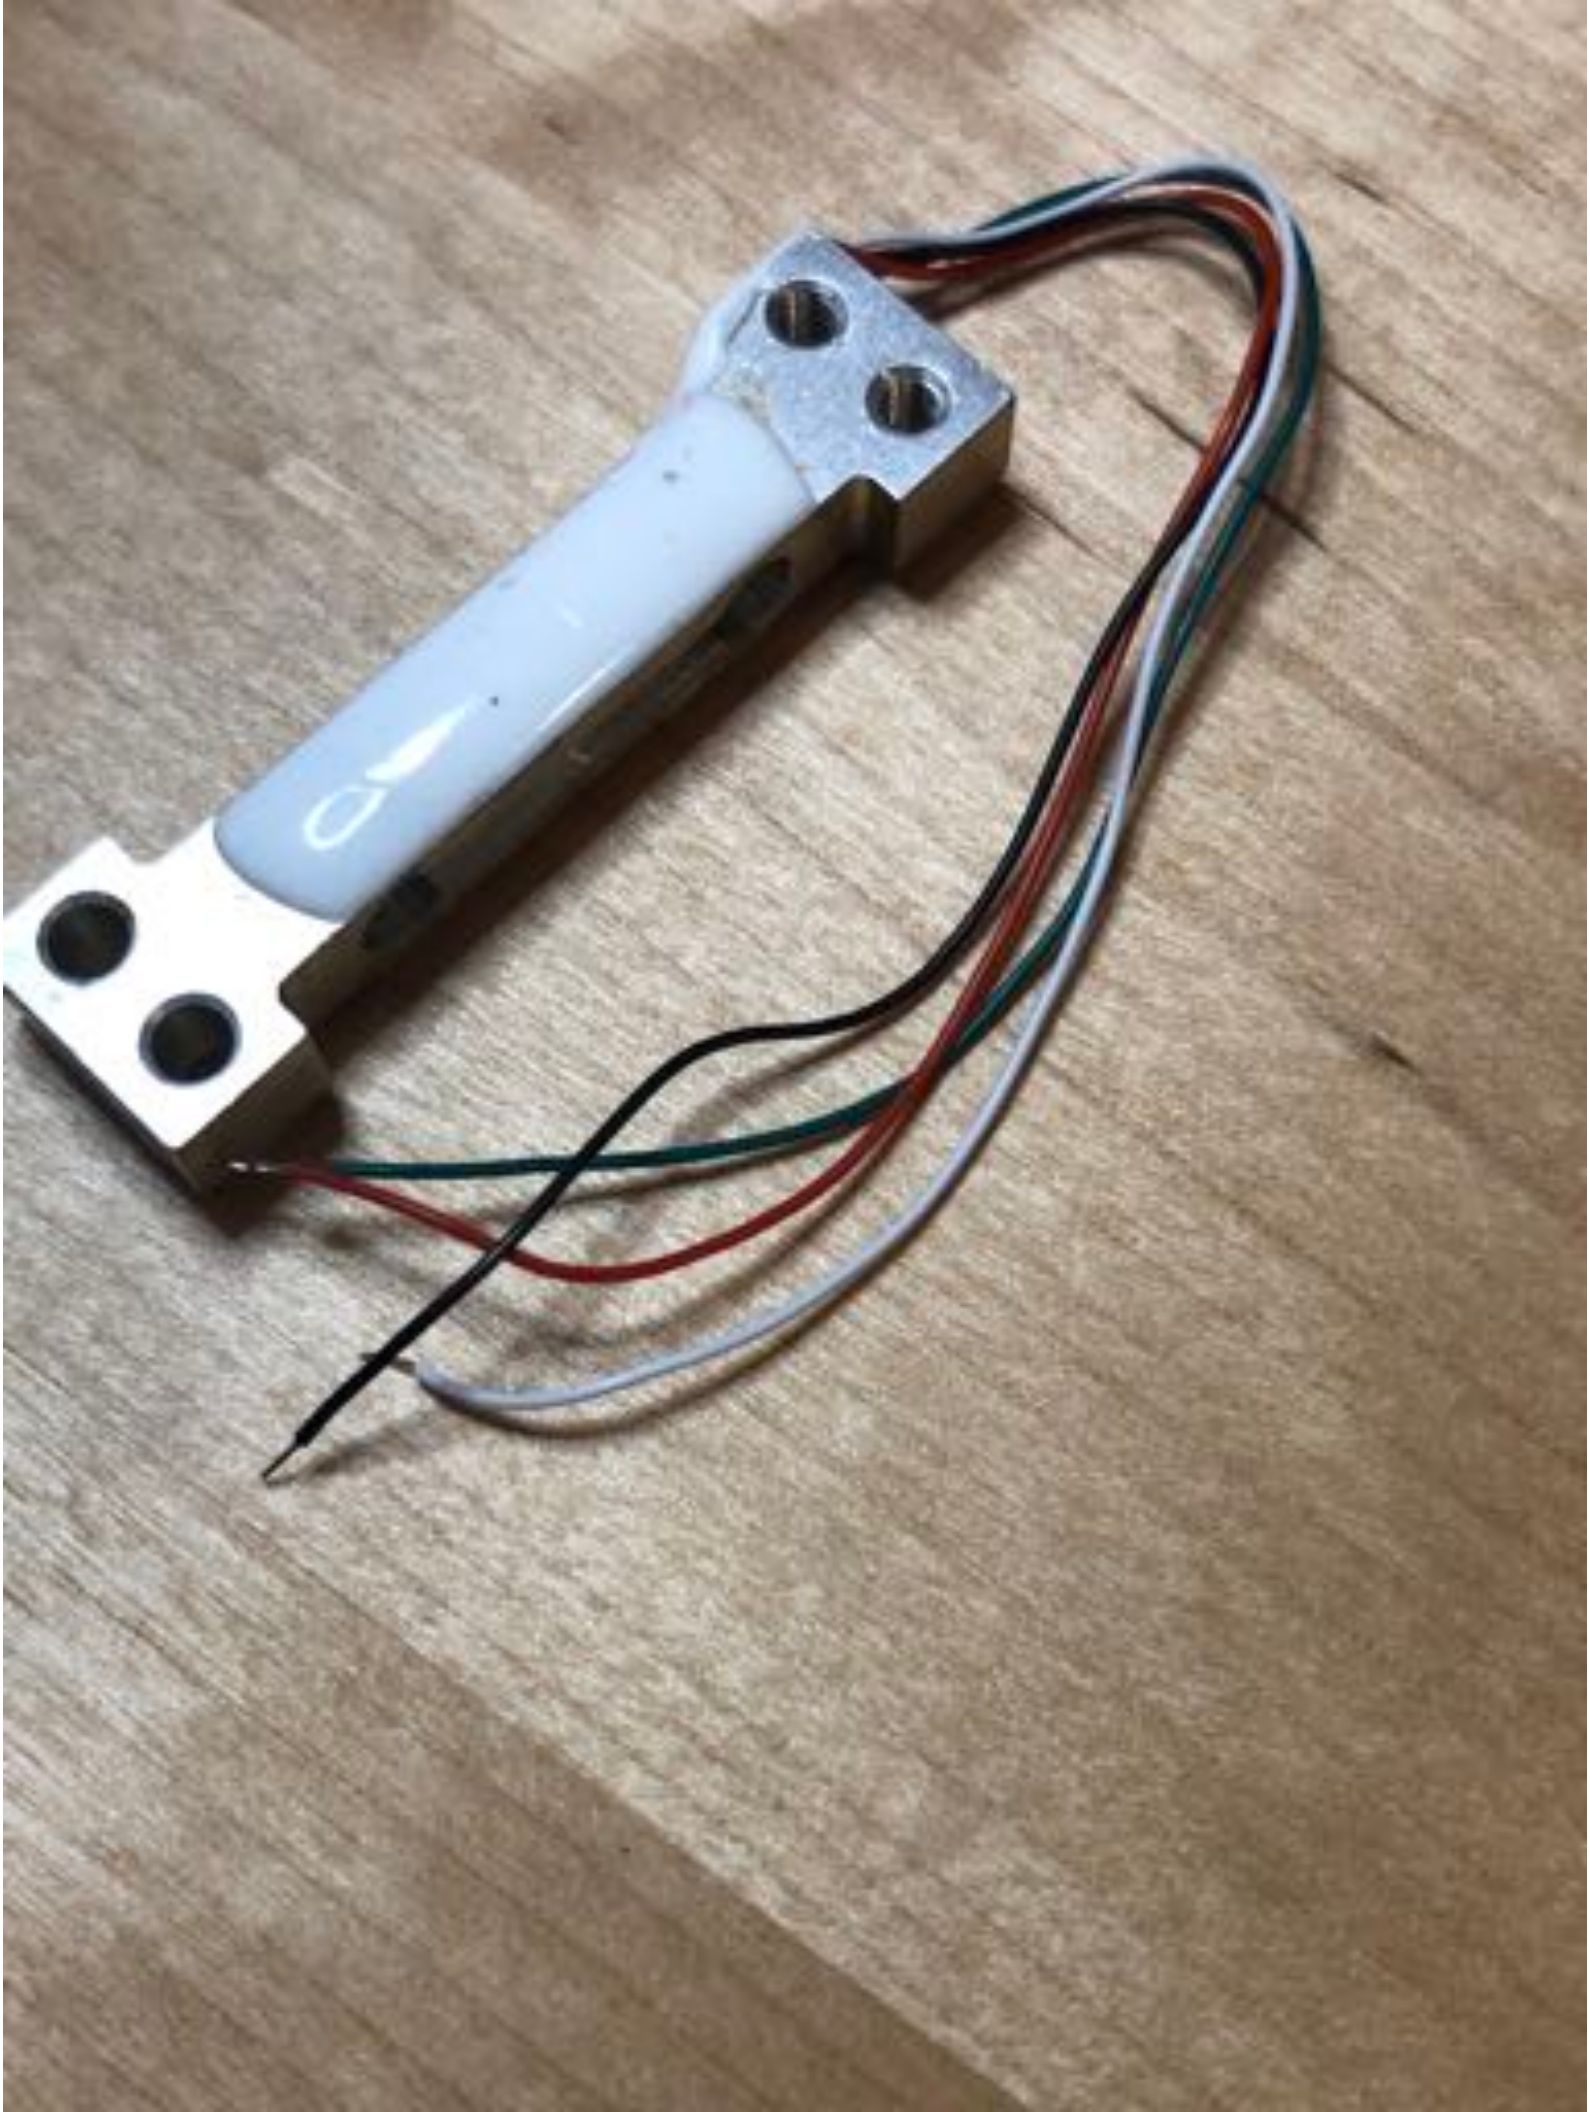




LED ON when Switch ON

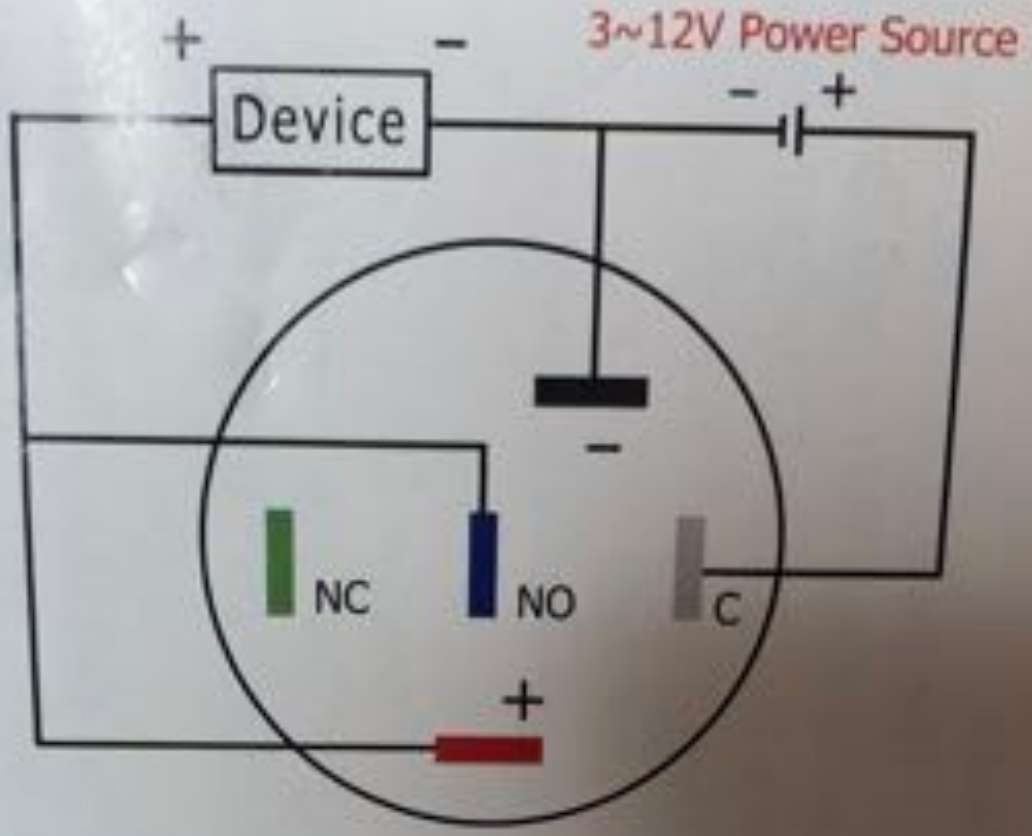

LED ON when Switch ON

Pin C to positive of the power
Pin + and **Pin NO**
to positive of the device
Pin - and negative of the device
to negative of the power
Pin NC is not used


LED Always ON



LED Always ON

Pin C to positive of the device
Pin + and **Pin NO**
to positive of the power
Pin - and negative of the device
to negative of the power
Pin NC is not used


LED ON when Switch ON

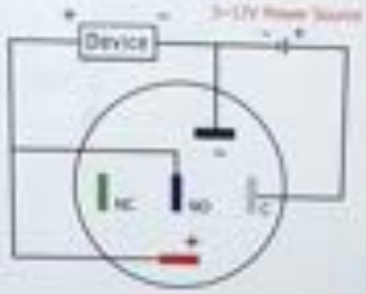

LED ON when Switch ON

Pin C to positive of the power
Pin + and **Pin NO**
to positive of the device
Pin - and negative of the device
to negative of the power
Pin NC is not used

LED ON when Switch OFF

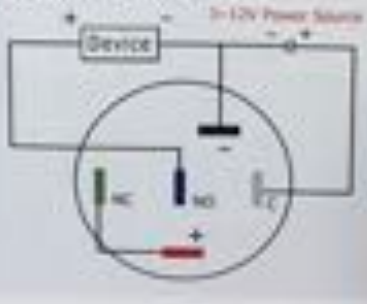

LED ON when Switch OFF

Pin C to positive of the power
Pin NO to positive of the device
Pin + to **Pin NC**
Pin - and negative of the device
to negative of the power





CCB 4320
5541 00003
Speaker
RGB-LED
Microphone



RockBirds®
AC ADAPTER
MODEL:RB-1202
INPUT:100-240VAC
50/60Hz
OUTPUT : 12V ⎓ 2A
MADE IN CHINA






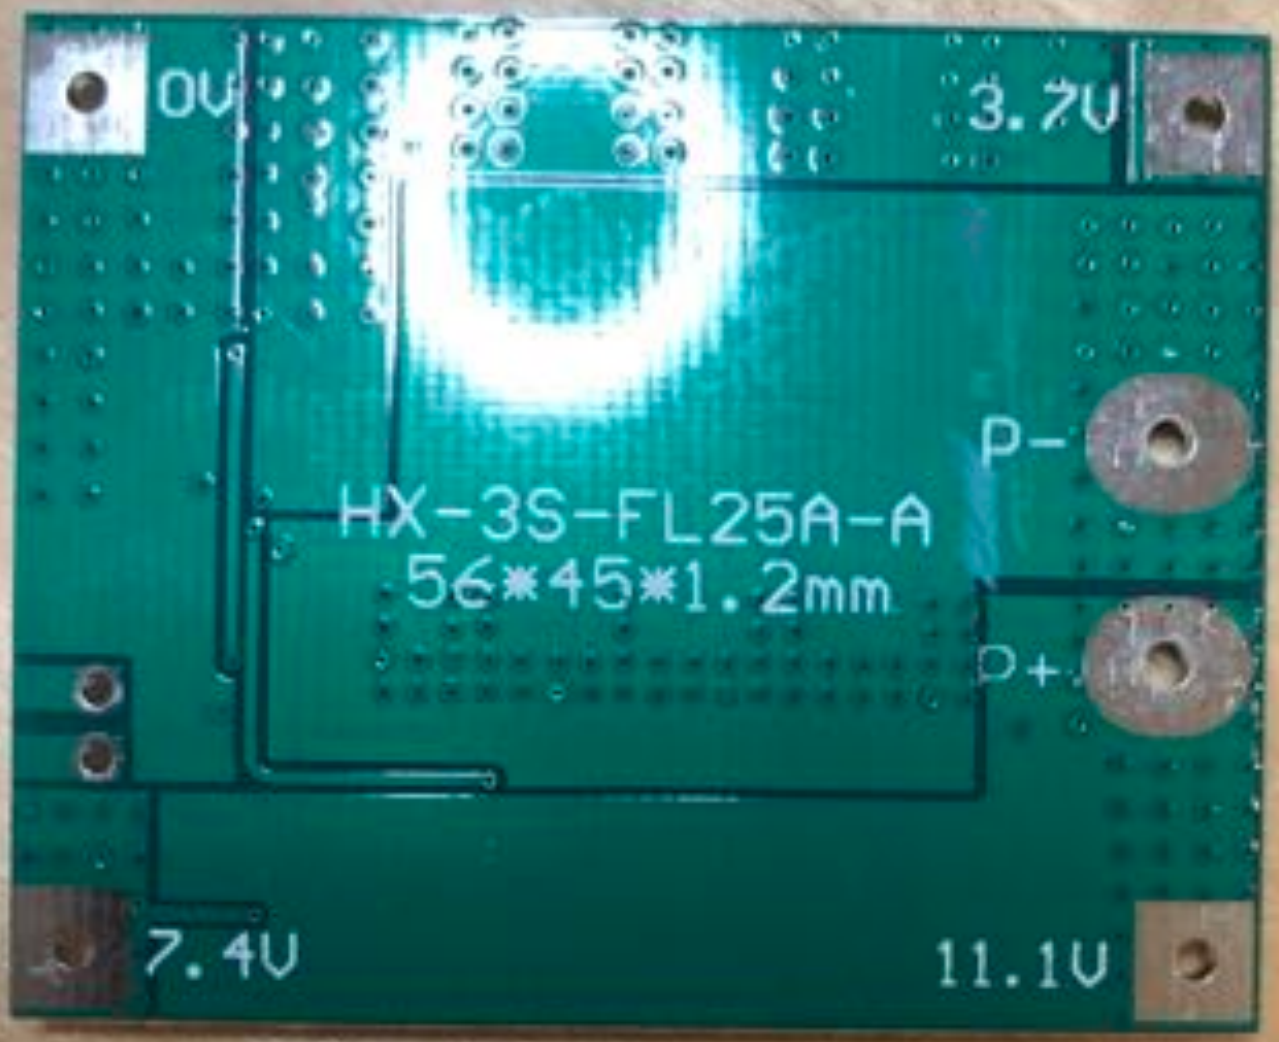



0V
3.7V
P-
HX-3S-FL25A-A
56*45*1.2mm
P+
7.4V
11.1V

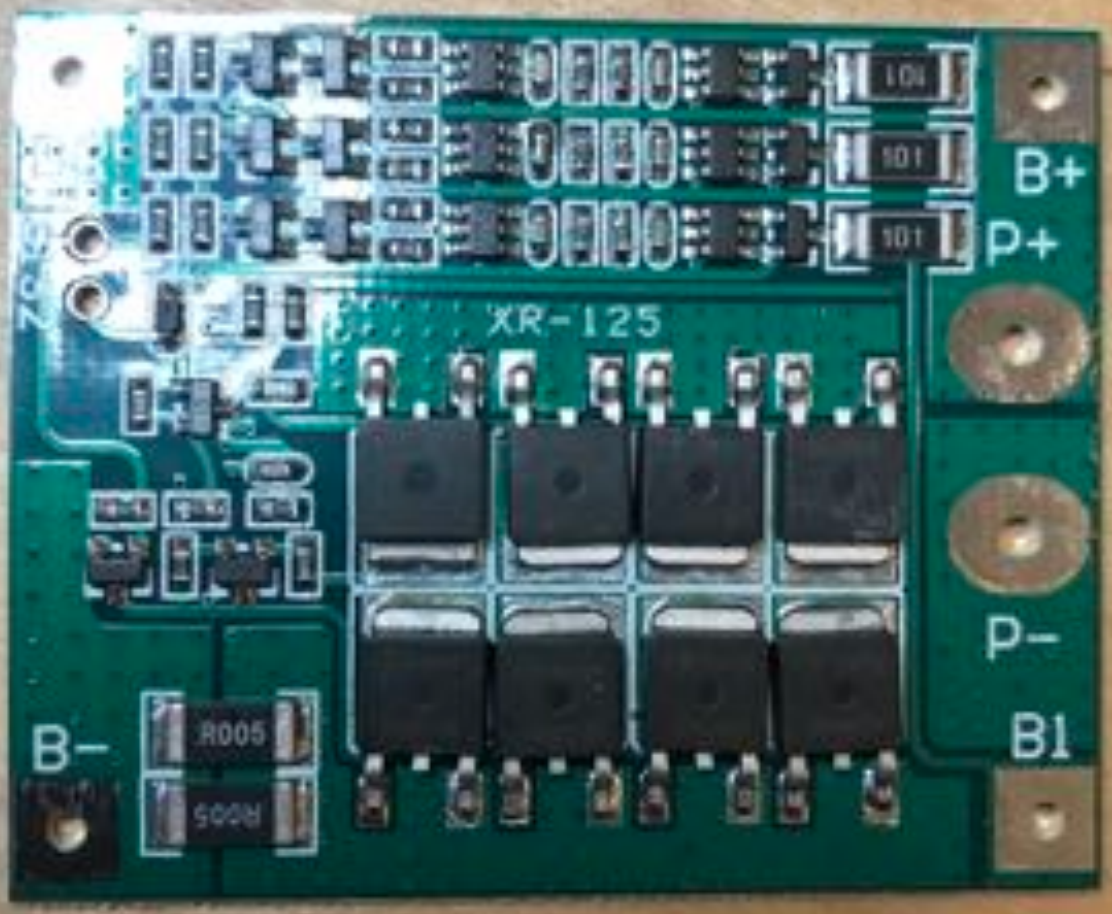

XR-125
B+
P+
P-
B1
B-
R005
R005



20 Kg
DESERVO
DIGITAL SERVO

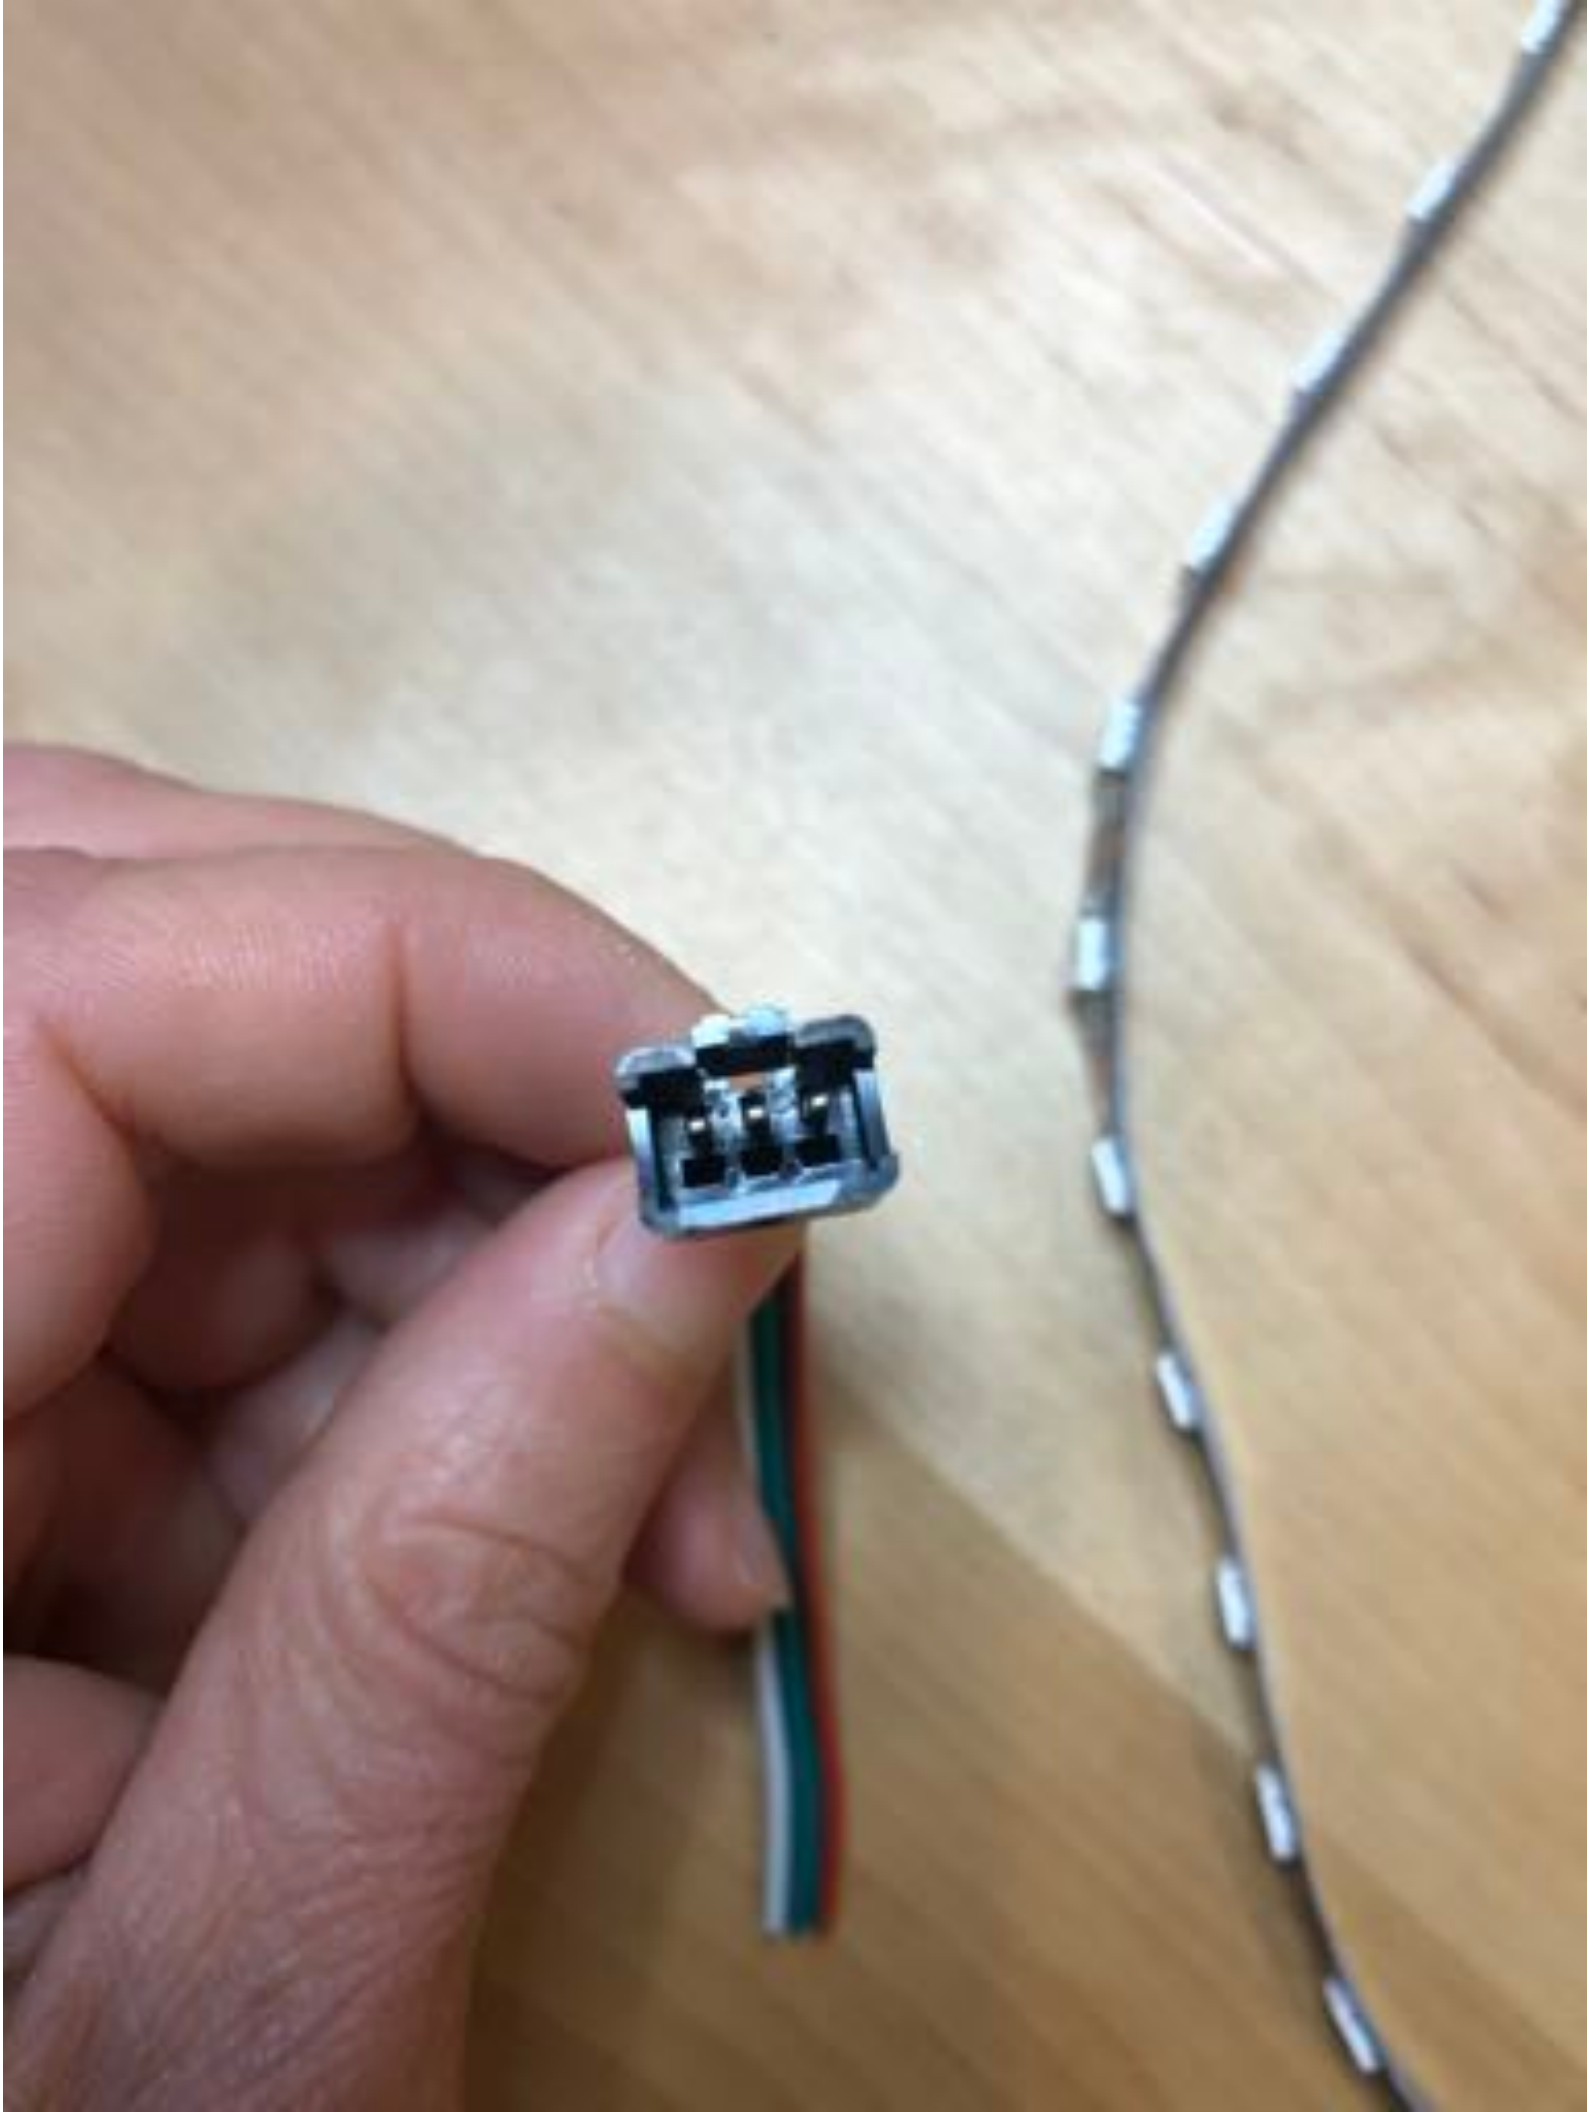




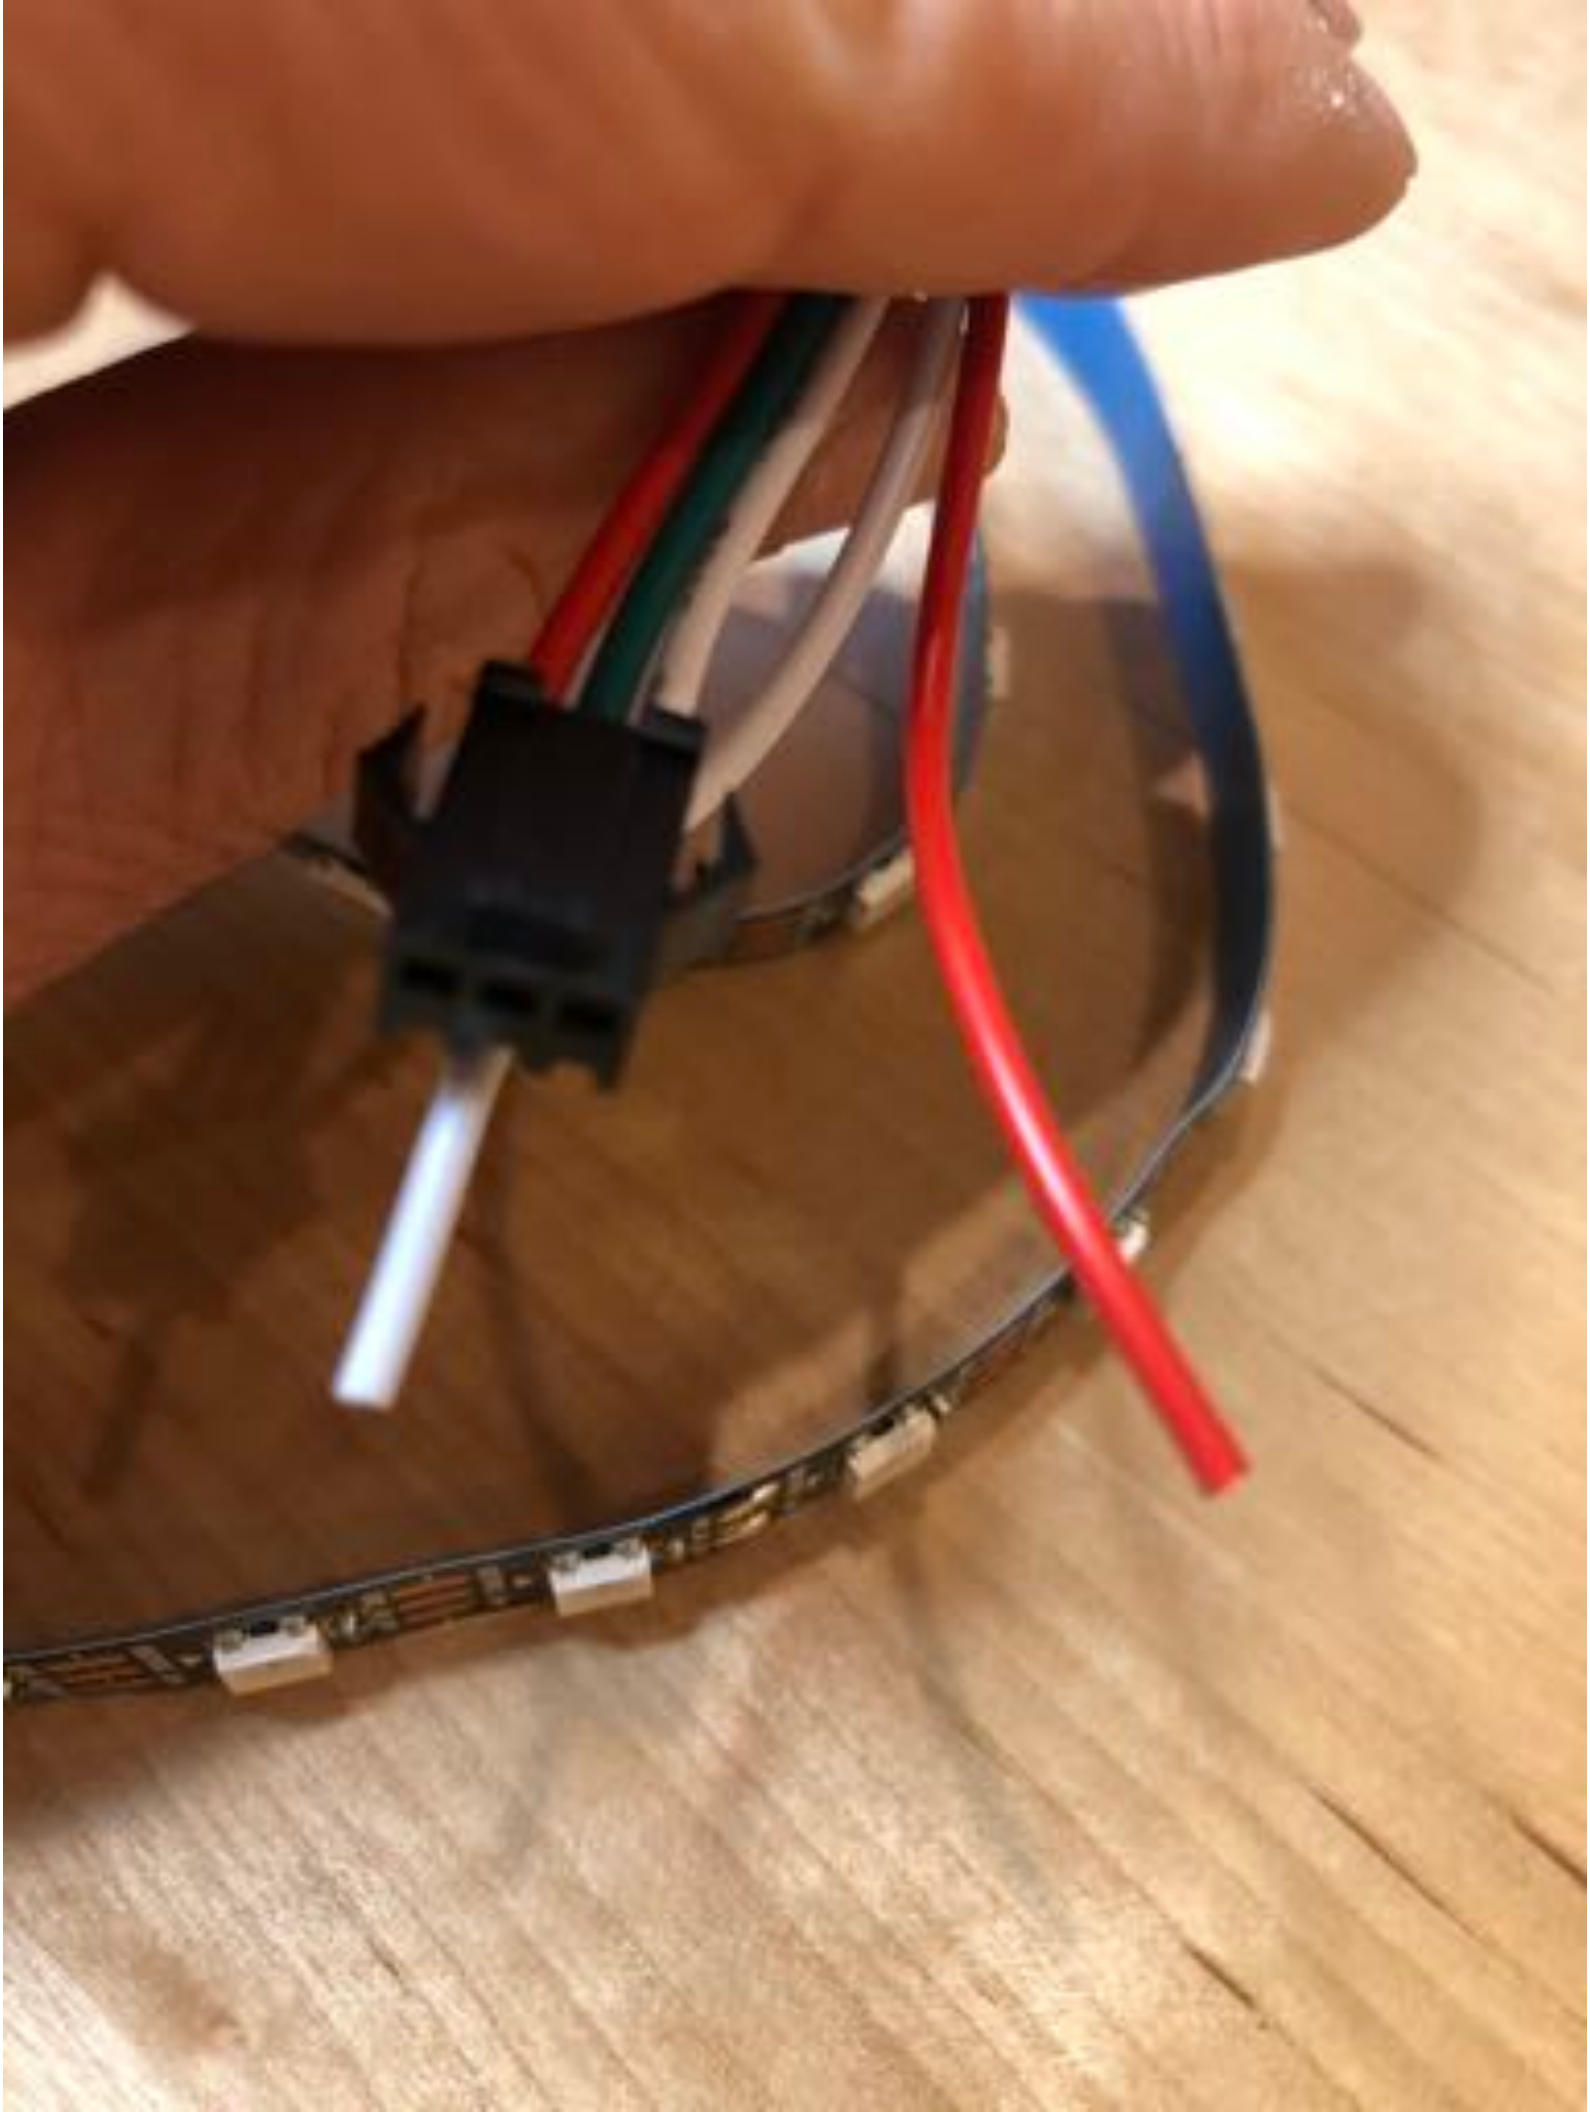


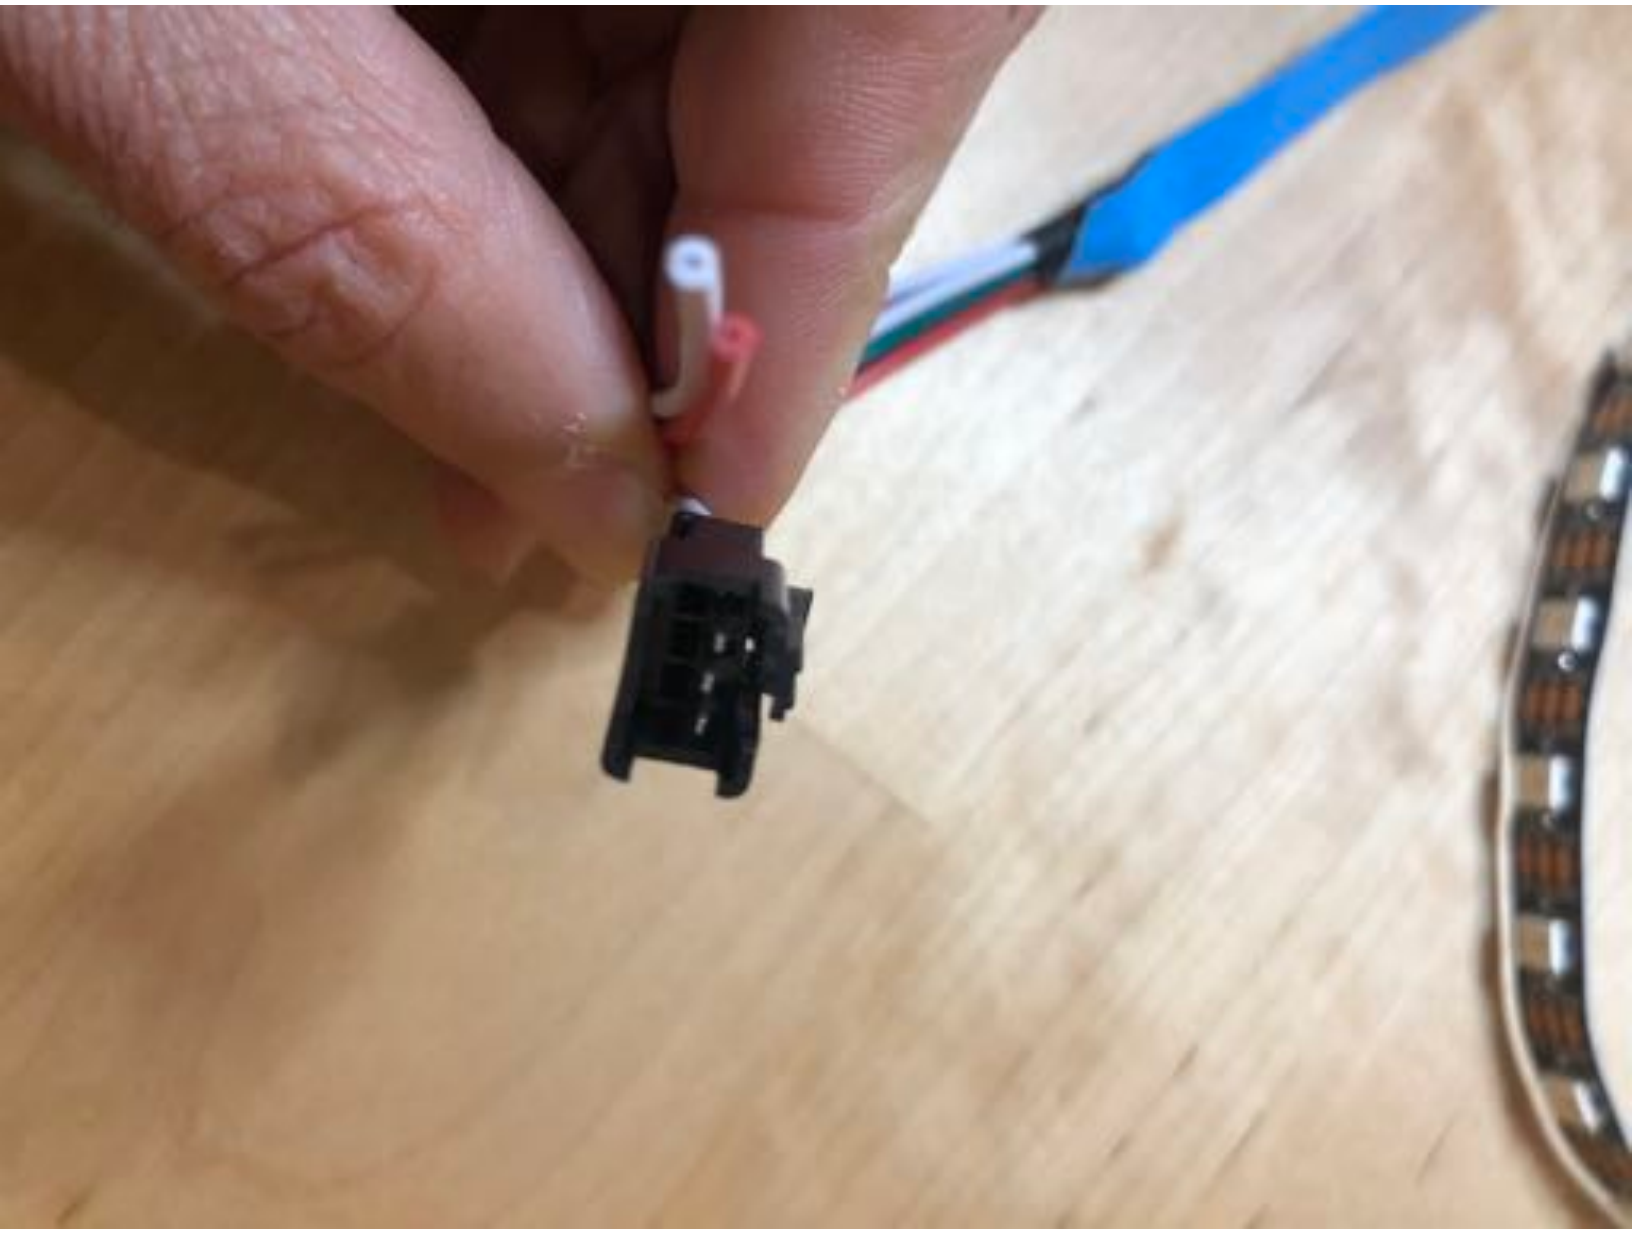

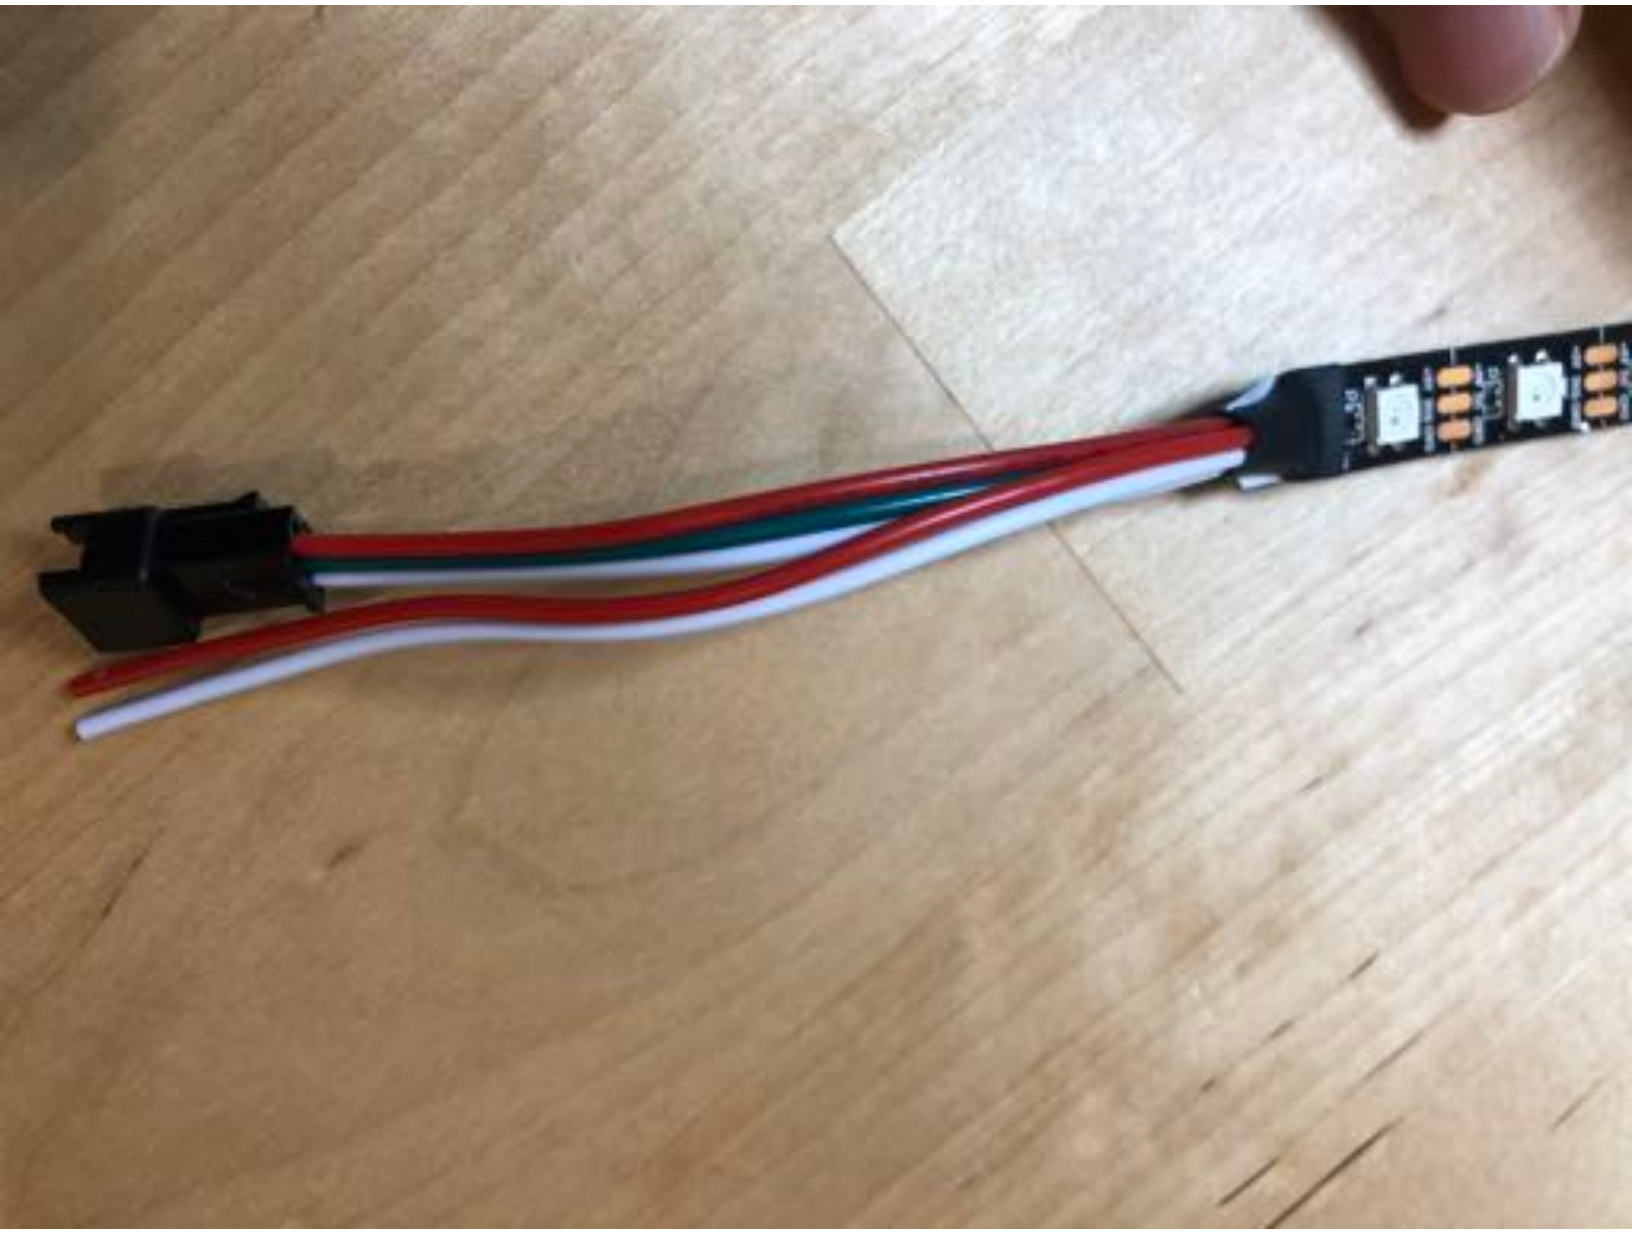




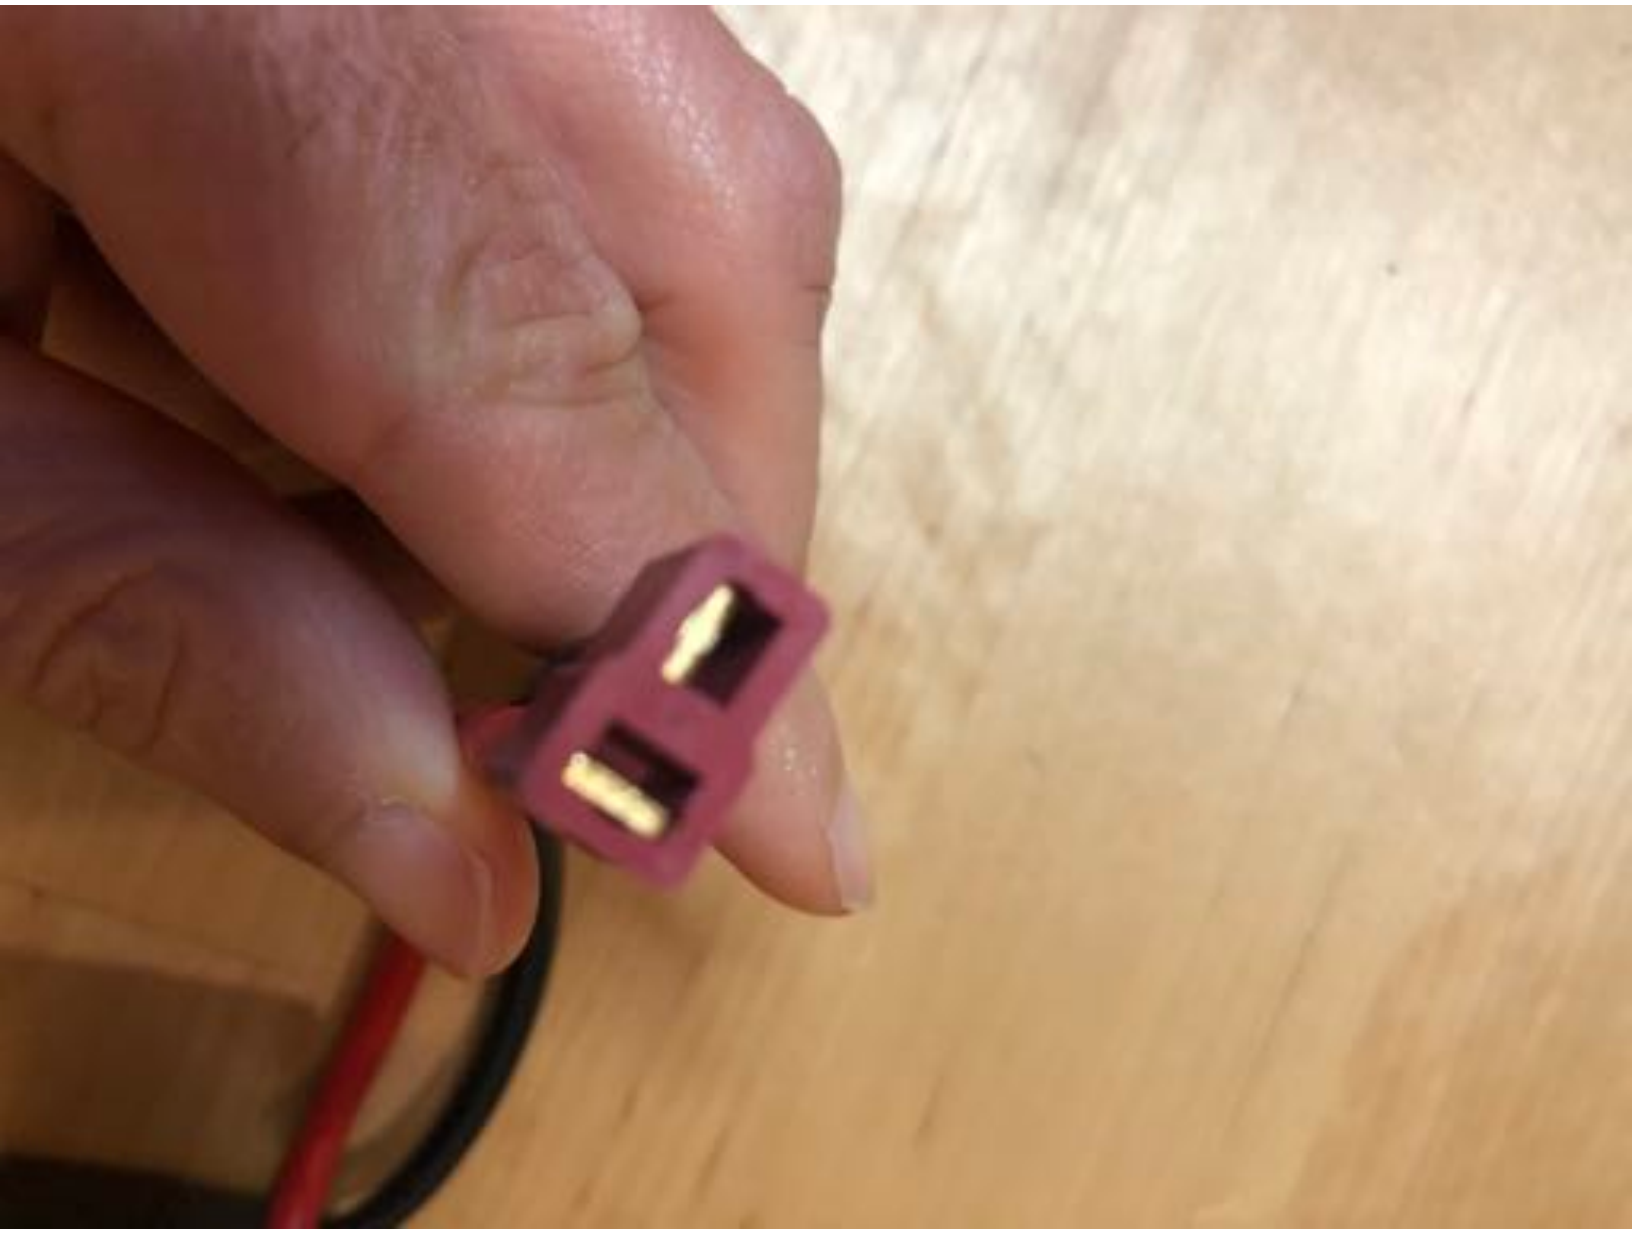

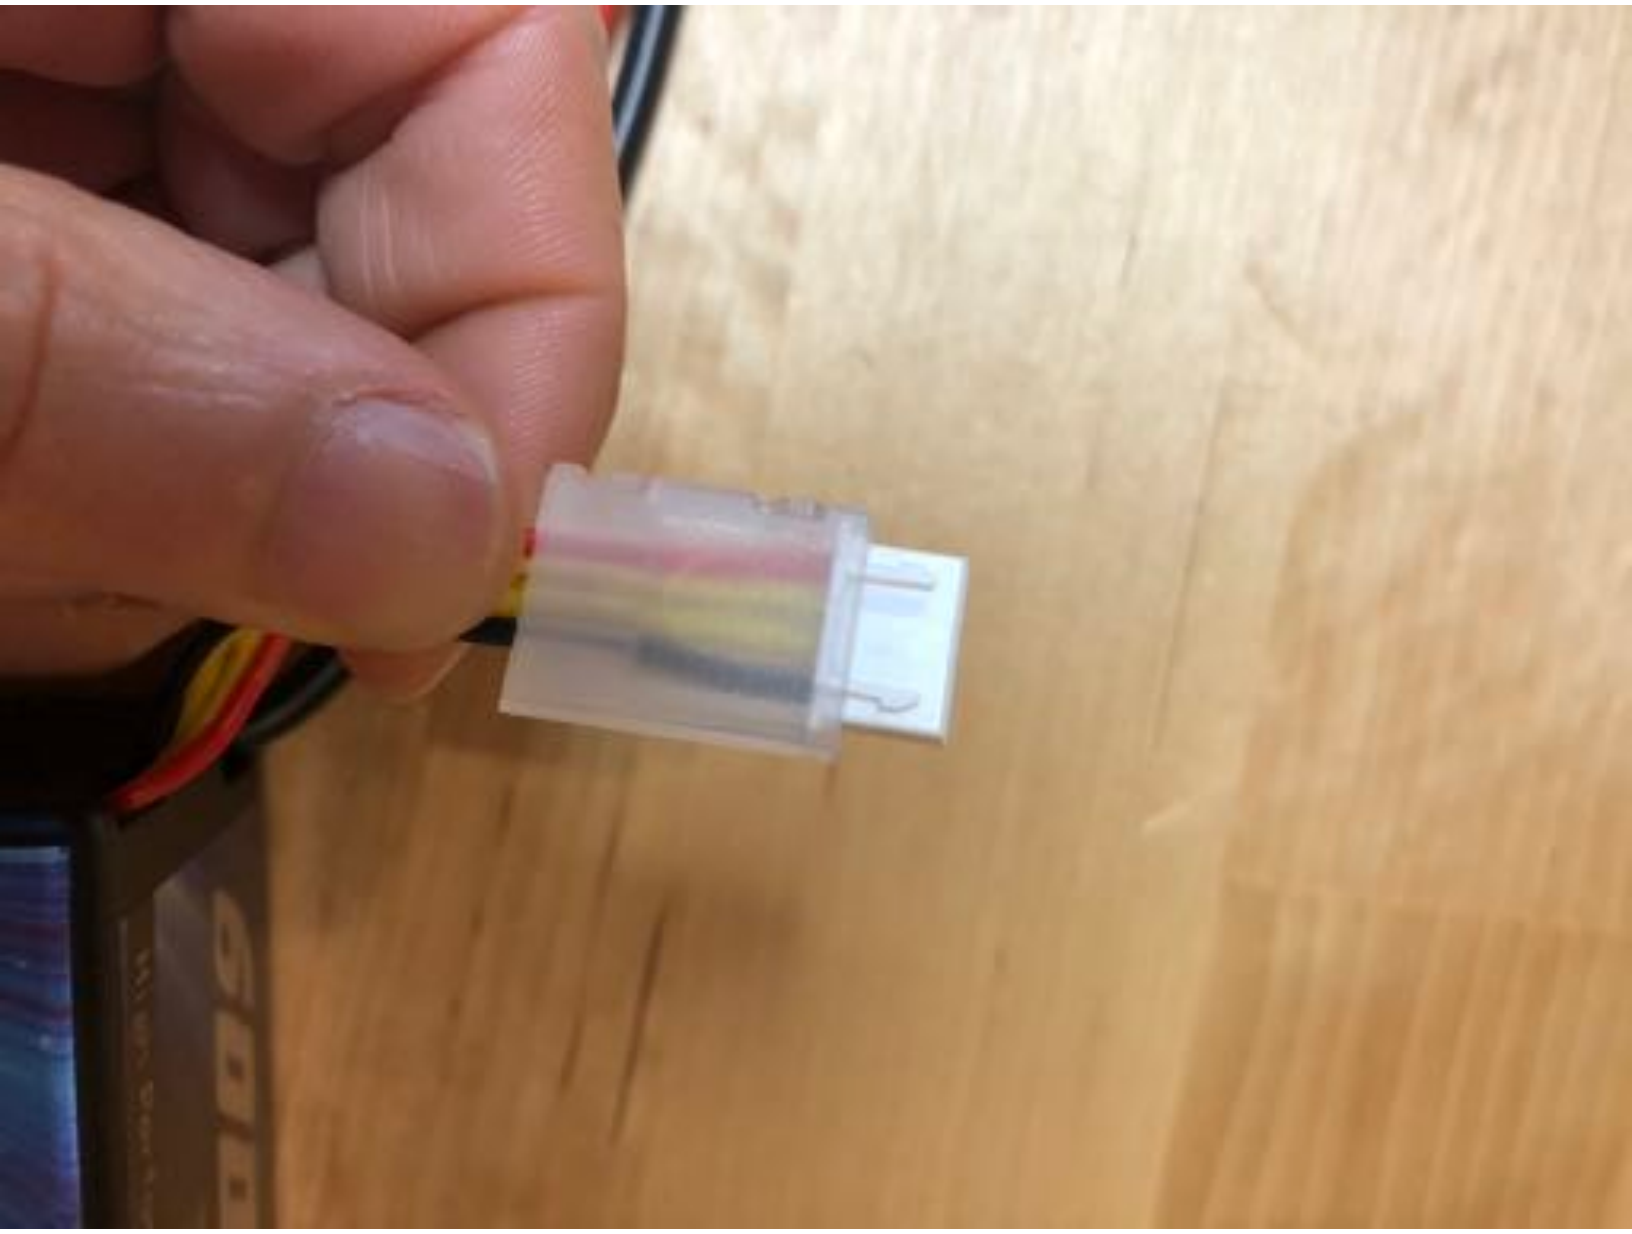


6000mAh
80C 11.1V
Zeee


RFID-RC522.

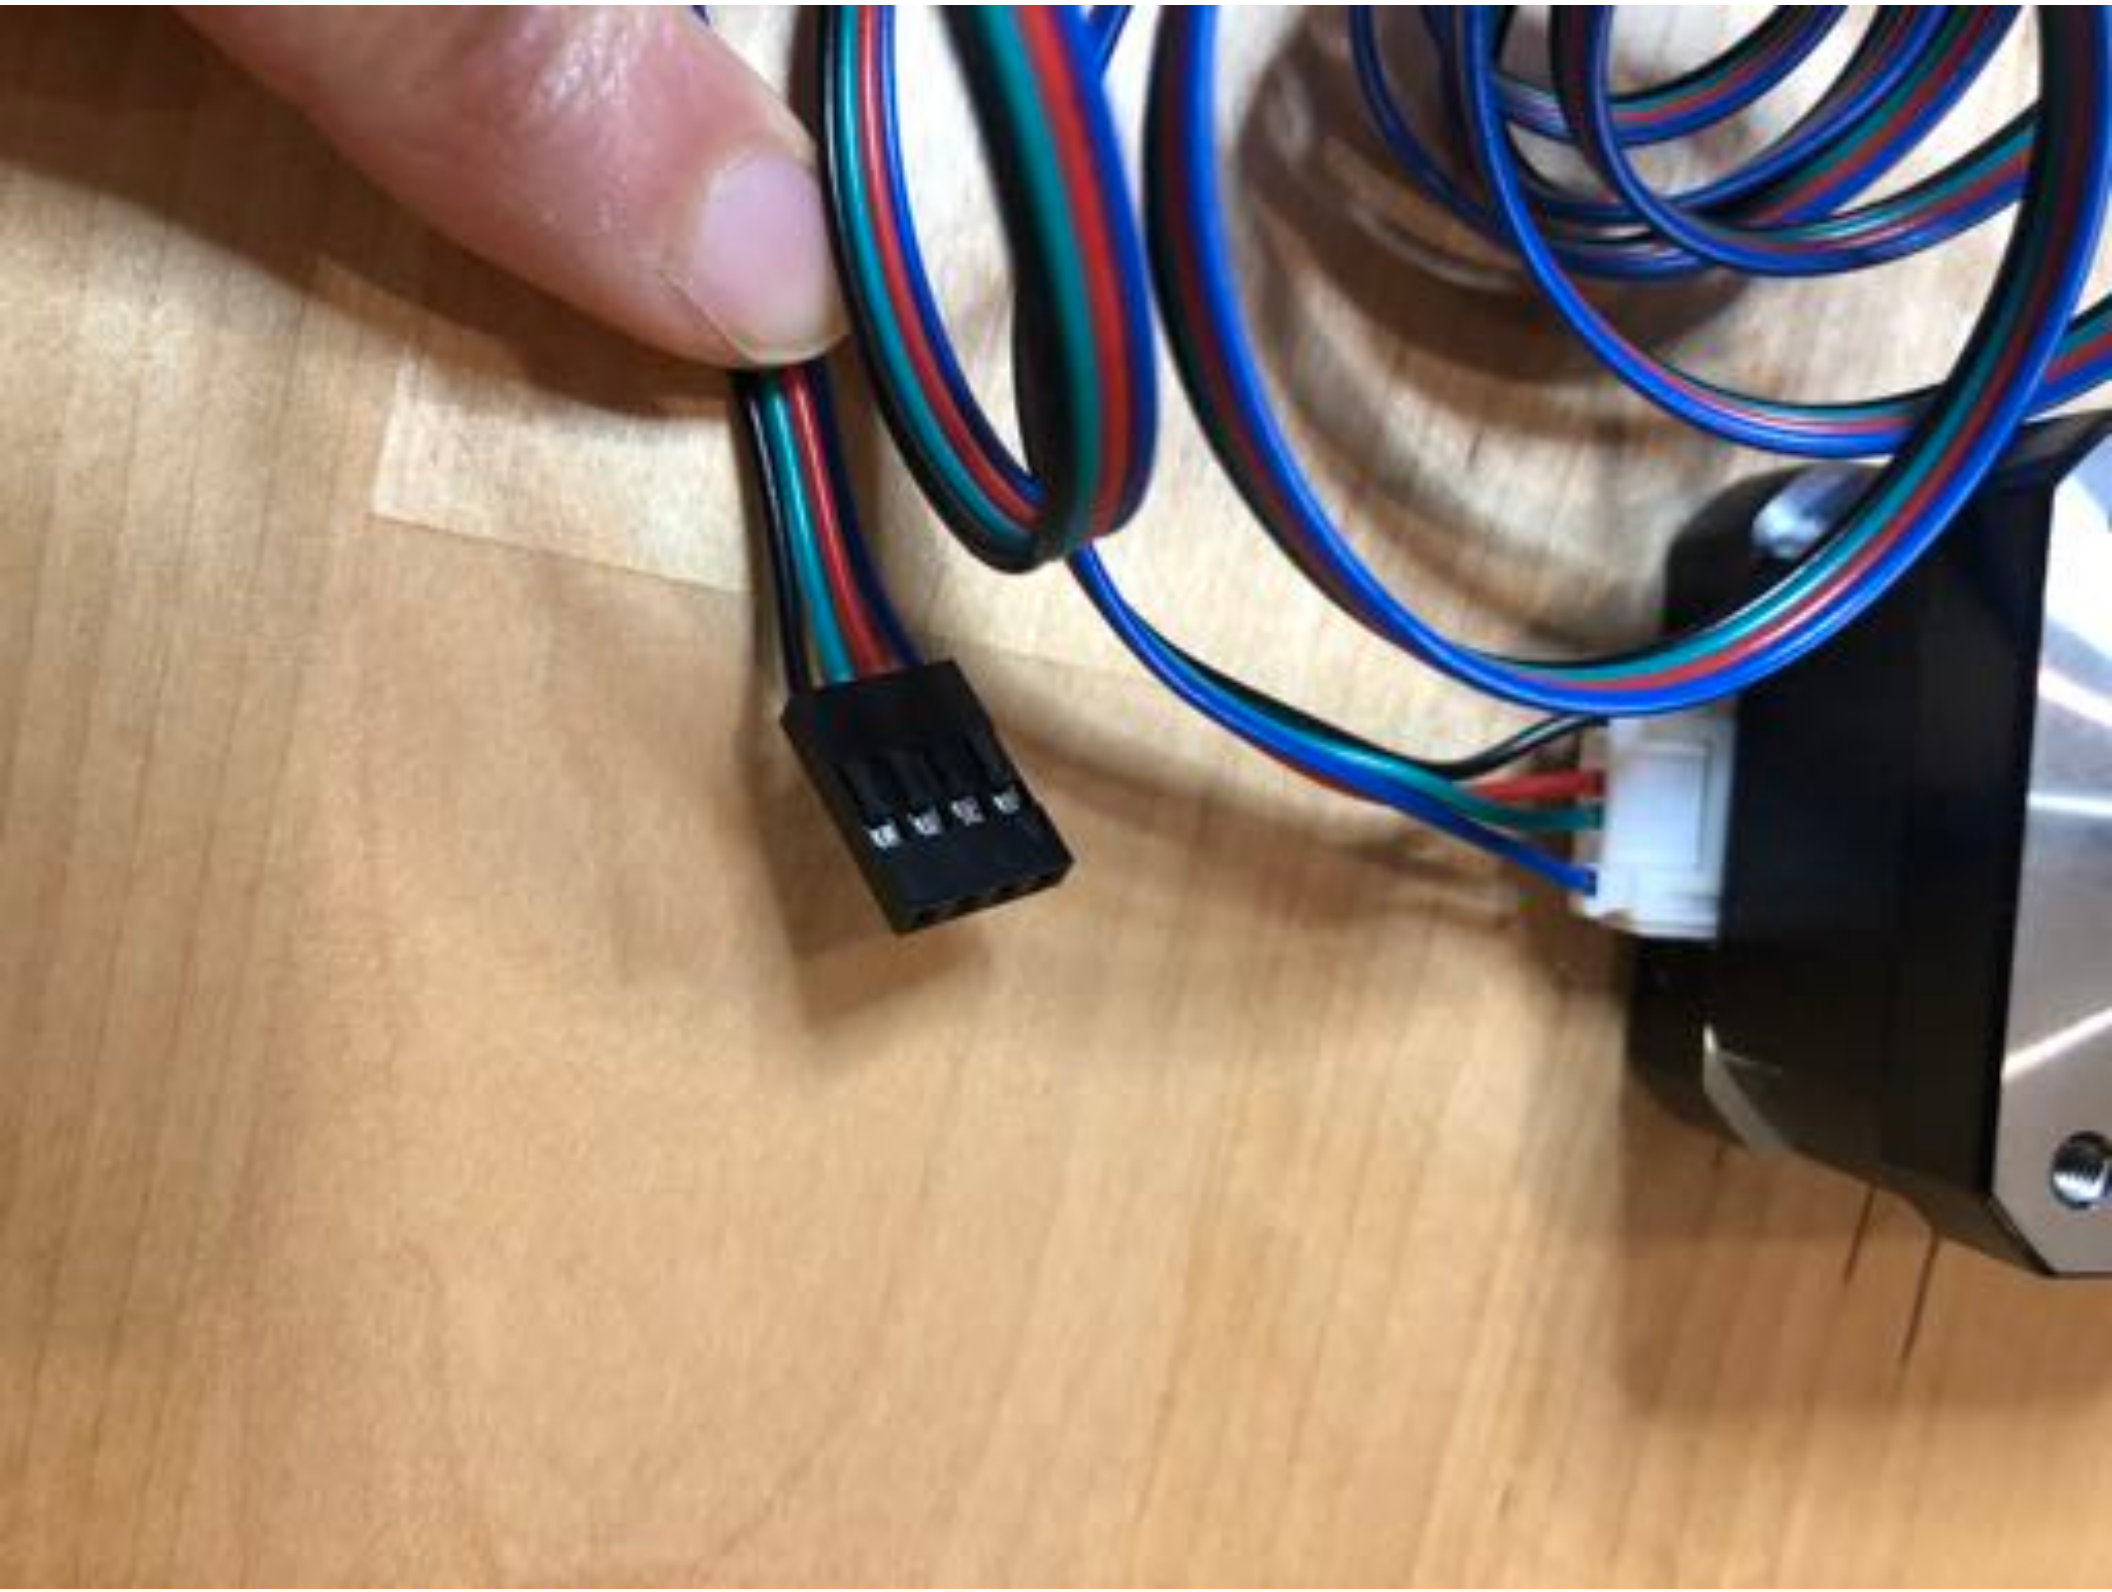


D2
C30
R20
D3
U9
R22
C31
R21
U10
K1
D1
C8
J2
L1
U4
C5
J4
R10
R5
C2
R9
R18
D5
Q1
R17
D4
GND
RX
TX
+5V
Q2
C22
U7
DB6970C72383131

