


Cannot open file
D:\eSpark-Consultants\eSpark-Hardware\Altium Template\espark-consulting-group-800x300.jpg.
File does not exist.


Title: Top-Sheet.SchDoc

File: Smart Power Supply Unit-v6.0.0.PrjPcb


Date: 4/18/2025	Page Num: 1
Drawn By: Huzaifa Ali	Page Total: 3

BATTERY_CONNECTOR

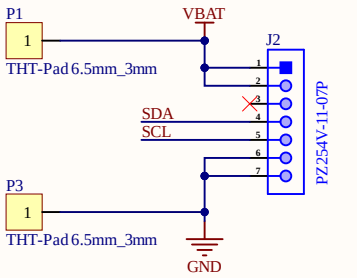


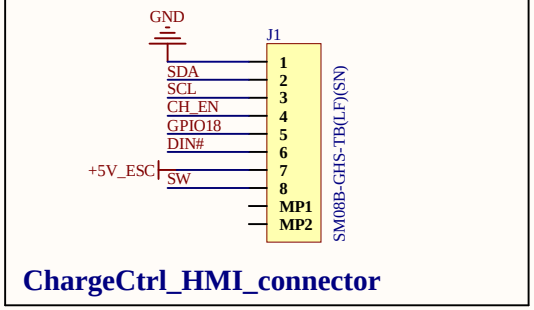


CHARGING_CONN

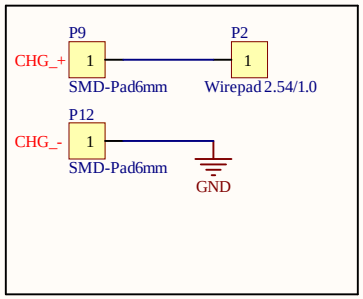

POWER_SWITCH

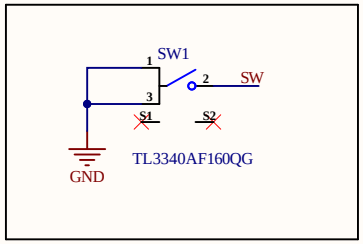

2S LiPo 8.4V (6V discharge voltage)

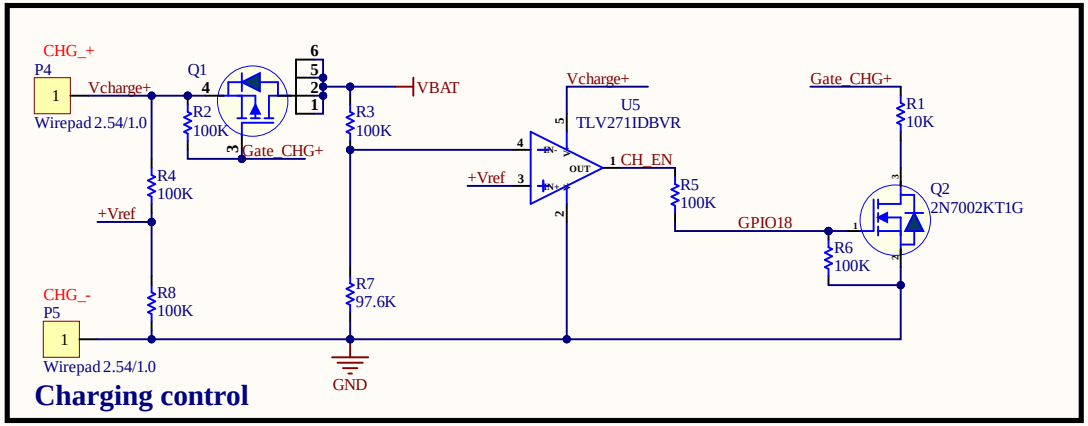


DIN# DIN#

GND GND

+5V_ESC +5V_ESC

Cannot open file D:\eSpark-Consultants\eSpark-Hardware\Altium Template\espark-consulting-group-800x300.jpg. File does not exist.

Title: Power_Sheet.SchDoc	
File: Smart Power Supply Unit-v6.0.0.PrjPcb	
Date: 4/21/2025	Page Num: 2
Drawn By: Huzaifa Ali	Page Total: 3

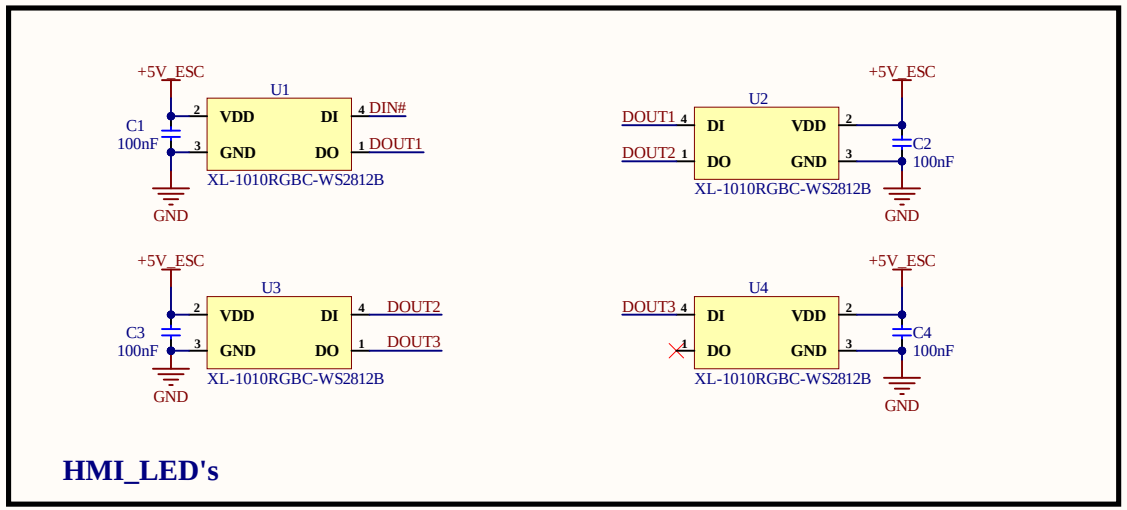


DIN# DIN#

GND GND

+5V_ESC +5V_ESC

Cannot open file D:\eSpark-Consultants\eSpark-Hardware\Altium Template\espark-consulting-group-800x300.jpg. File does not exist.

Title: HMI Led's_Sheet.SchDoc	
File: Smart Power Supply Unit-v6.0.0.PrjPcb	
Date: 4/18/2025	Page Num: 3
Drawn By: Huzaifa Ali	Page Total: 3

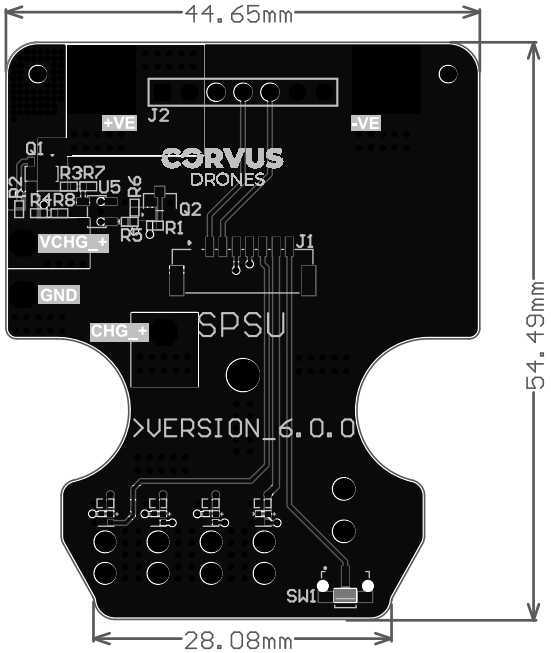

Layer	Name	Material	Thickness	Constant	Board Layer Stack
	Top Overlay				
	Top Solder	Solder Resist	0.39mil	3.5	
1	Top Layer		1.38mil		
	Dielectric 1	FR-4	59.06mil	4.8	
2	Bottom Layer		1.38mil		
	Bottom Solder	Solder Resist	0.39mil	3.5	
	Bottom Overlay				
Total board thickness:			62.60mil		