




## POWER SUPPLY ORING CIRCUIT

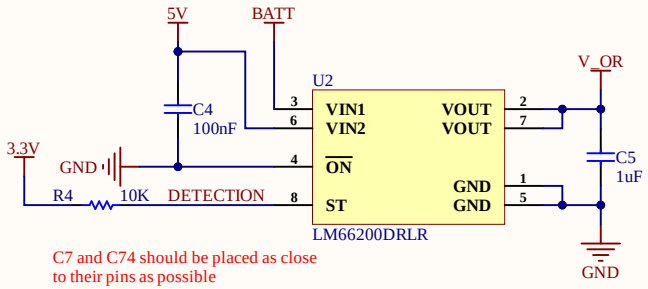


C7 and C74 should be placed as close to their pins as possible

The highest voltage supply is automatically selected. ST pin is used to detect which voltage is currently selected

## BATTERY CHARGING CIRCUIT

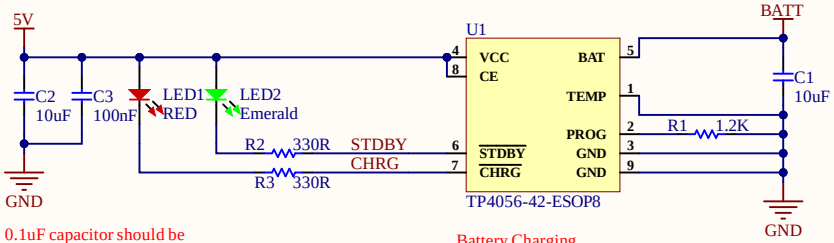



0.1uF capacitor should be placed closest to VCC pin

Place LED 2 close to USB port for visibility

Battery Charging current = 1000mA

## LDO_SECTION

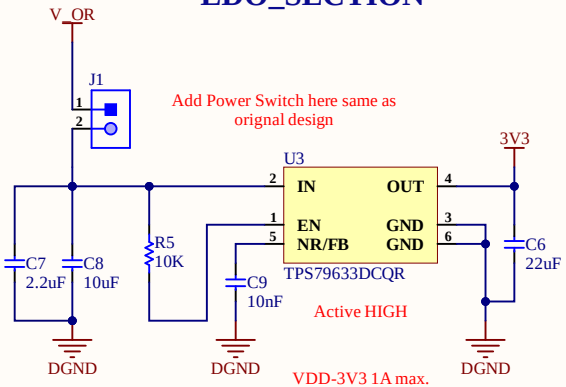


Active HIGH

VDD-3V3 1A max. current


VUSB — VUSB


BATT — BATT


DC_Barrel_5V — DC_Barrel_5V

eSpark Consulting Group

| | | |
|---|---|---|
| Title: Power_Sheet.SchDoc | | |
| File: Telephone Circuit V1.0.PrjPcb | | |
| Date: 26/12/2024 | Page | Num: 1 |
| Drawn By: Huzaifa Ali | Page | Total: 5 |

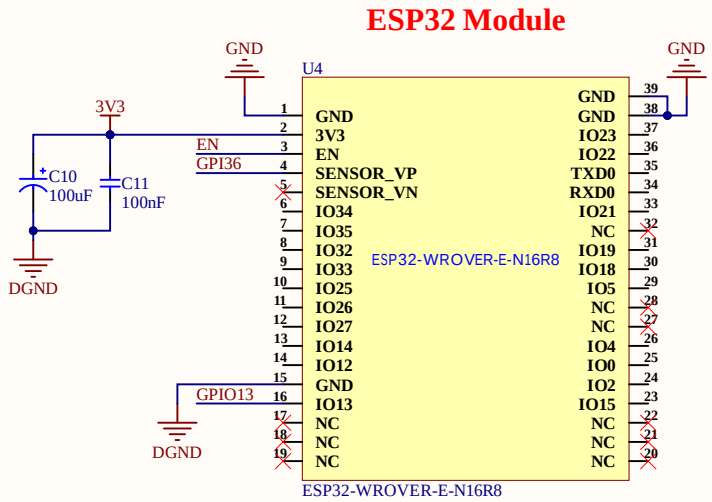



| | |
|---|---|
| Title: Controller_Sheet.SchDoc | |
| File: Telephone Circuit V1.0.PrjPcb | |
| Date: 26/12/2024 | Page Num: 2 |
| Drawn By: Huzaifa Ali | Page Total: 5 |


# Audio Codec





eSpark Consulting Group
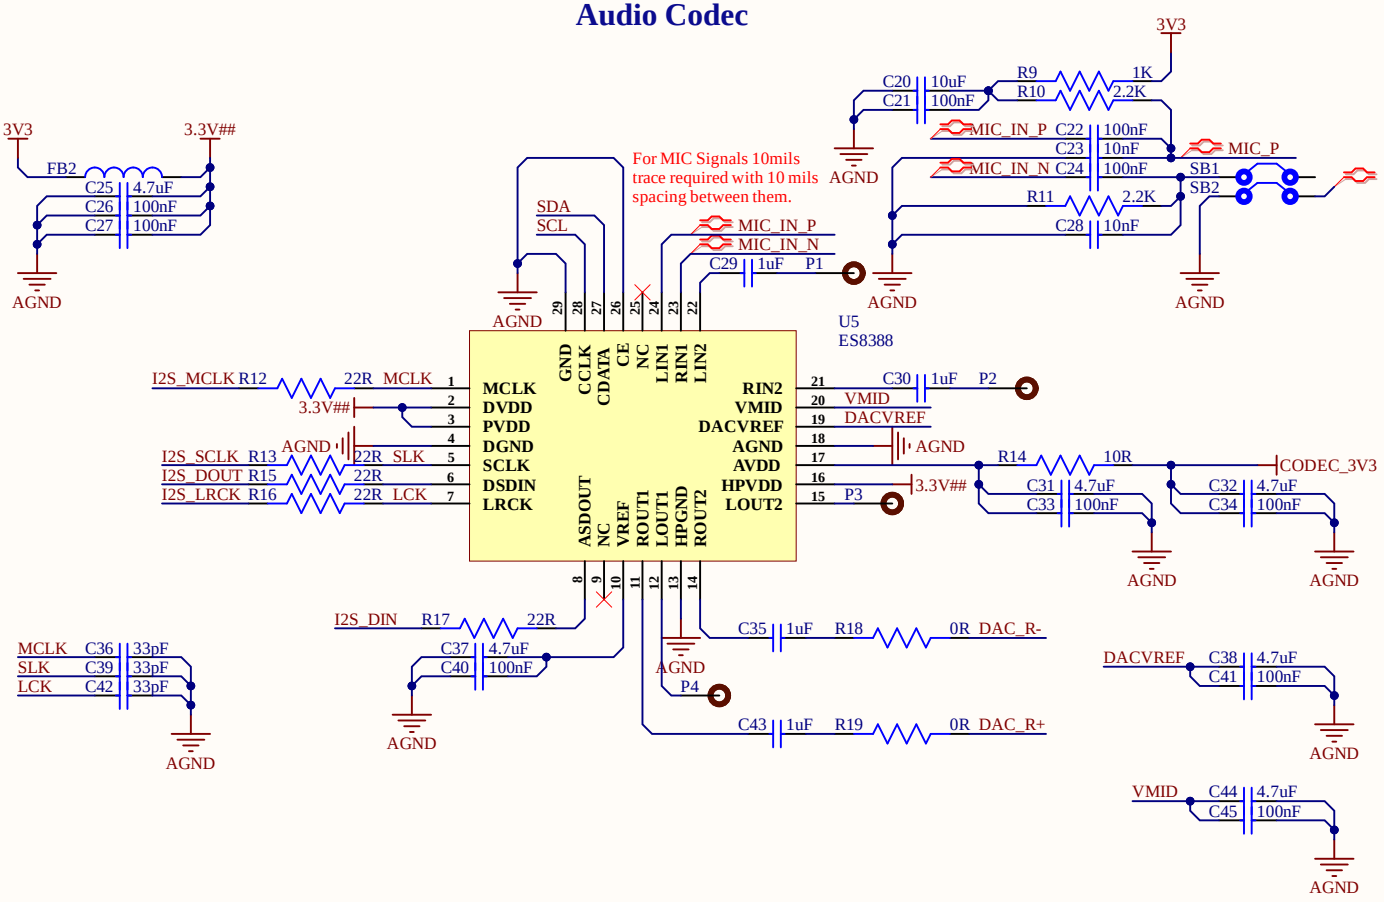
| | |
|---|---|
| Title: Audio Processing_Sheet.SchDoc | |
| File: Telephone Circuit V1.0.PrjPcb | |
| Date: 26/12/2024 | Page Num: 3 |
| Drawn By: Huzaifa Ali | Page Total: 5 |


## DC BARREL JACK INPUT 5V

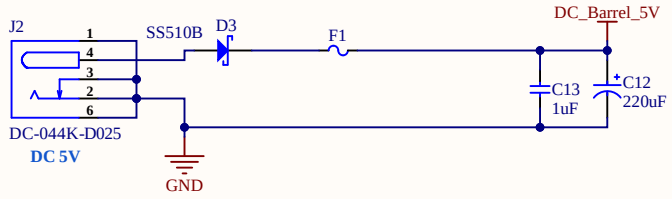



## VUSB 5V INPUT

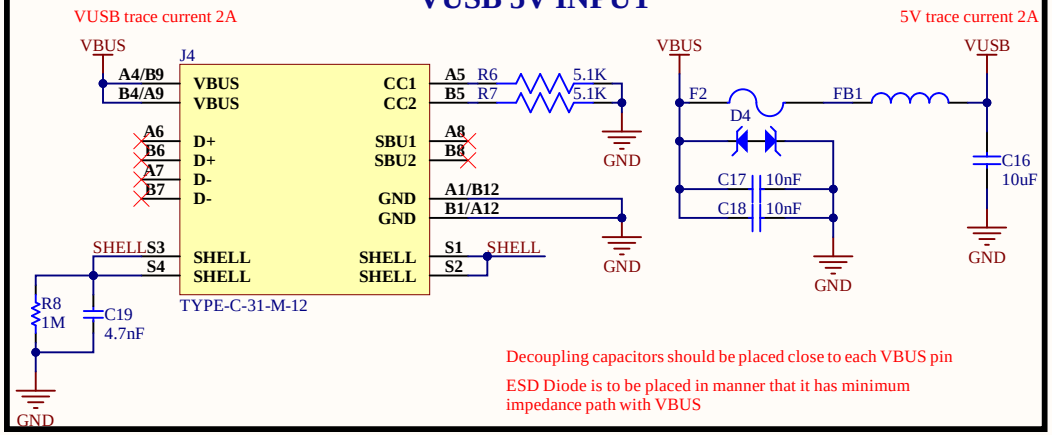


## BATTERY INPUT




## Ringer_Coil




VUSB — VUSB

BATT — BATT

DC_Barrel_5V — DC_Barrel_5V


Ringer_Coil1 — Ringer_Coil1

Ringer_Coil2 — Ringer_Coil2


eSpark Consulting Group

| | |
|---|---|
| Title: Connector_Sheet.SchDoc | |
| File: Telephone Circuit V1.0.PrjPcb | |
| Date: 26/12/2024 | Page Num: 4 |
| Drawn By: Huzaifa Ali | Page Total: 5 |

## Ringer_PS_42V

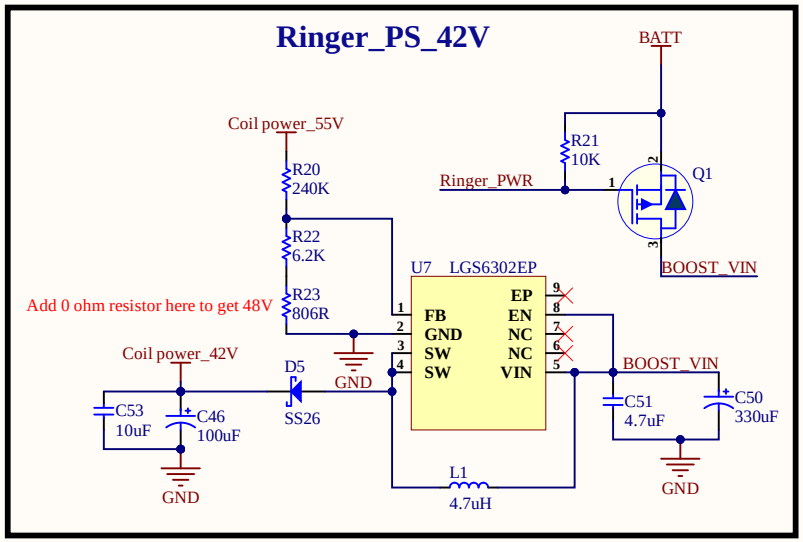


## Ringer_Coil_Driver

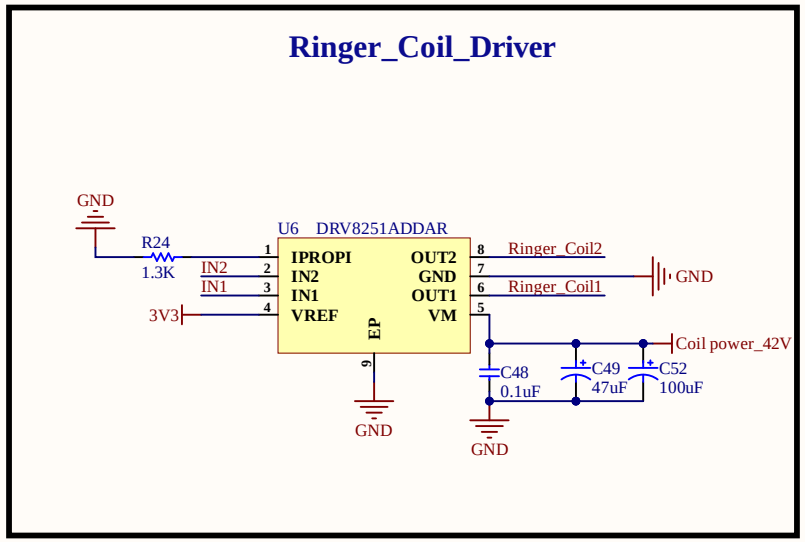


Ringer_Coil1 — Ringer_Coil1
Ringer_Coil2 — Ringer_Coil2

Ringer_PWR — Ringer_PWR
IN1 — IN1
IN2 — IN2

eSpark Consulting Group

| | |
|---|---|
| Title: Ringer_Sheet.SchDoc | |
| File: Telephone Circuit V1.0.PrjPcb | |
| Date: 26/12/2024 | Page Num: 5 |
| Drawn By: Huzaifa Ali | Page Total: 5 |