



POWER SUPPLY ORING CIRCUIT

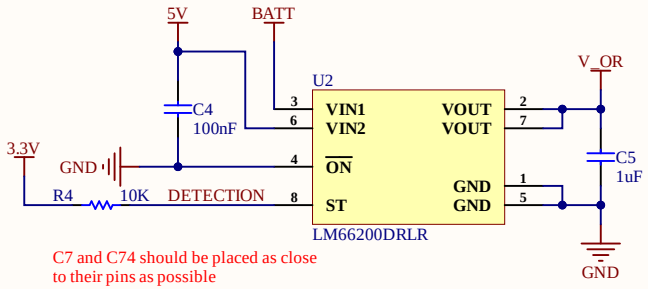

C7 and C74 should be placed as close to their pins as possible

The highest voltage supply is automatically selected. ST pin is used to detect which voltage is currently selected

BATTERY CHARGING CIRCUIT

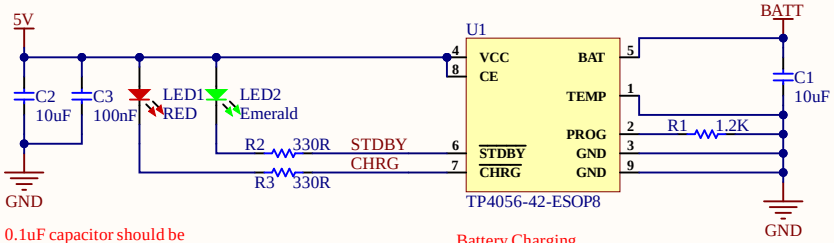


0.1uF capacitor should be placed closest to VCC pin

Place LED 2 close to USB port for visibility

Battery Charging current = 1000mA

LDO_SECTION

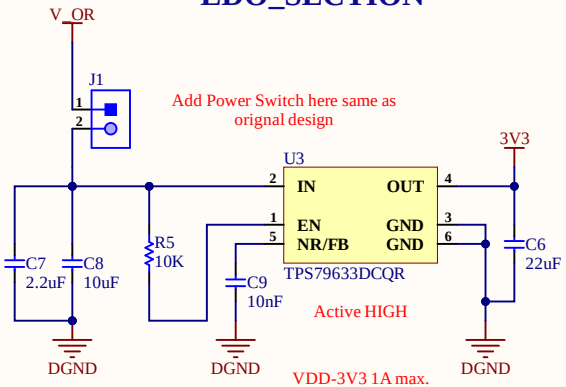

Active HIGH

VDD-3V3 1A max. current


VUSB — VUSB


BATT — BATT


DC_Barrel_5V — DC_Barrel_5V

eSpark Consulting Group

Title: Power_Sheet.SchDoc		
File: Telephone Circuit V1.0.PrjPcb		
Date: 26/12/2024	Page	Num: 1
Drawn By: Huzaifa Ali	Page	Total: 5

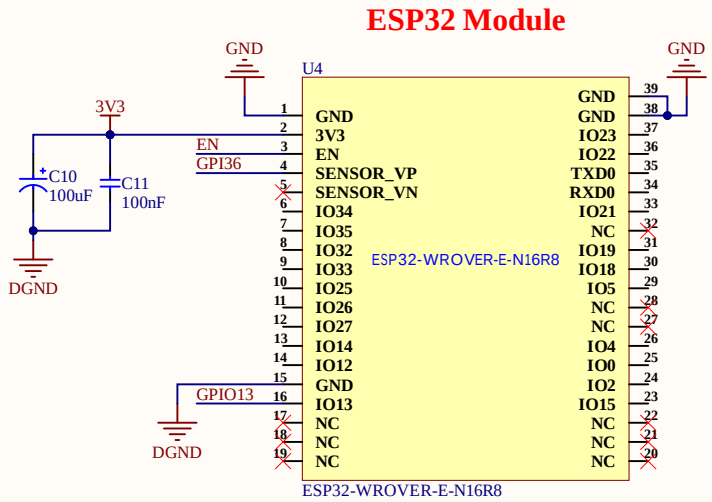






Title: Controller_Sheet.SchDoc	
File: Telephone Circuit V1.0.PrjPcb	
Date: 26/12/2024	Page Num: 2
Drawn By: Huzaifa Ali	Page Total: 5


Audio Codec

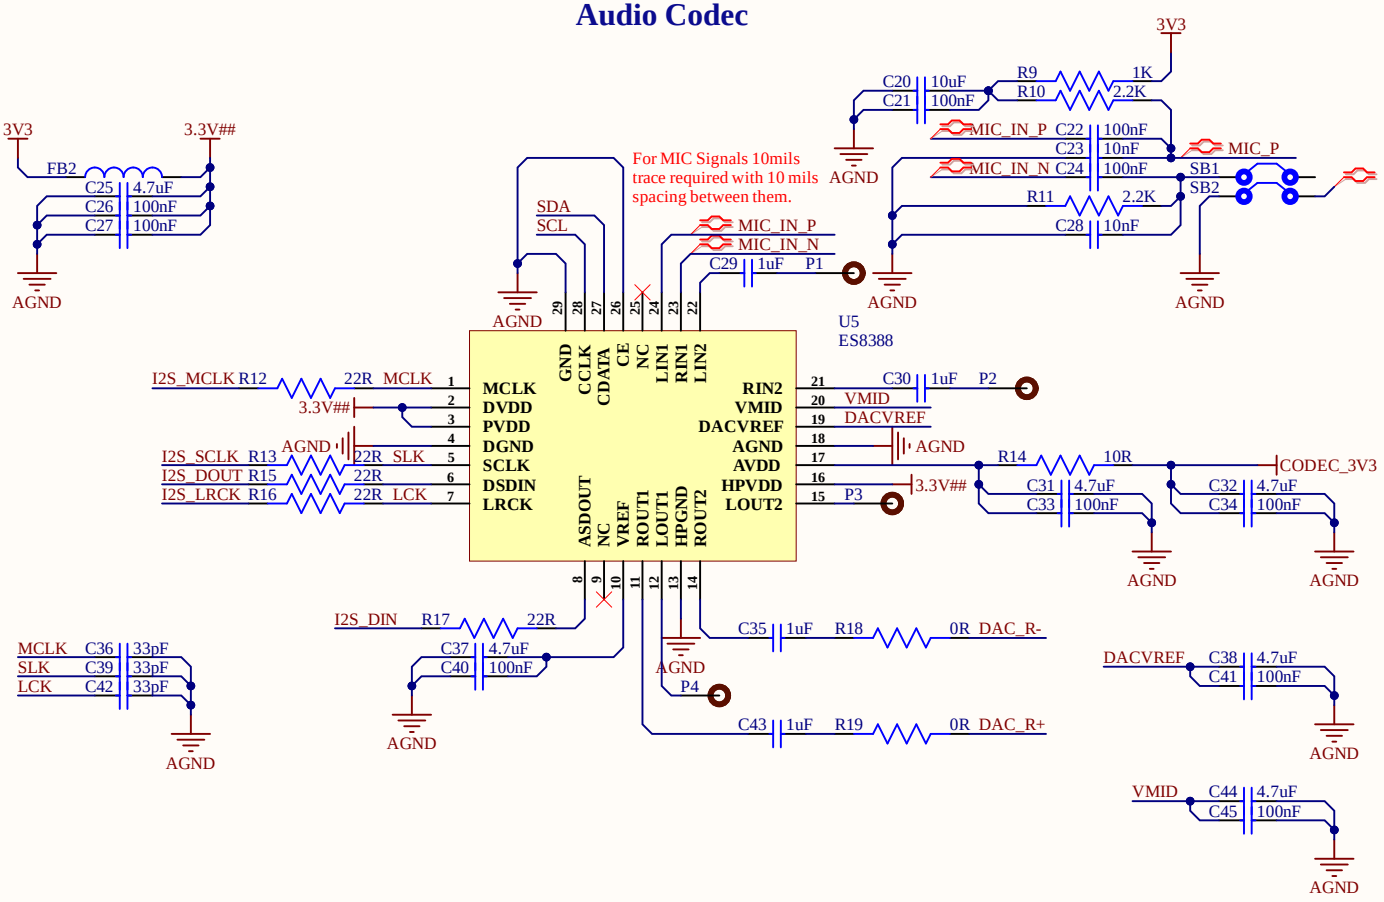


eSpark Consulting Group

Title: Audio Processing_Sheet.SchDoc	
File: Telephone Circuit V1.0.PrjPcb	
Date: 26/12/2024	Page Num: 3
Drawn By: Huzaifa Ali	Page Total: 5


DC BARREL JACK INPUT 5V

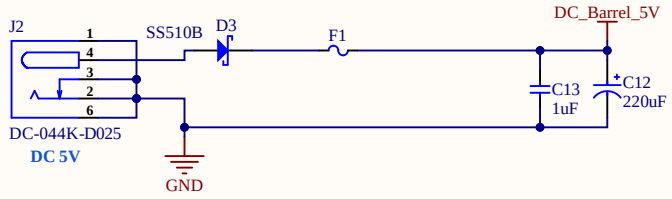


VUSB 5V INPUT

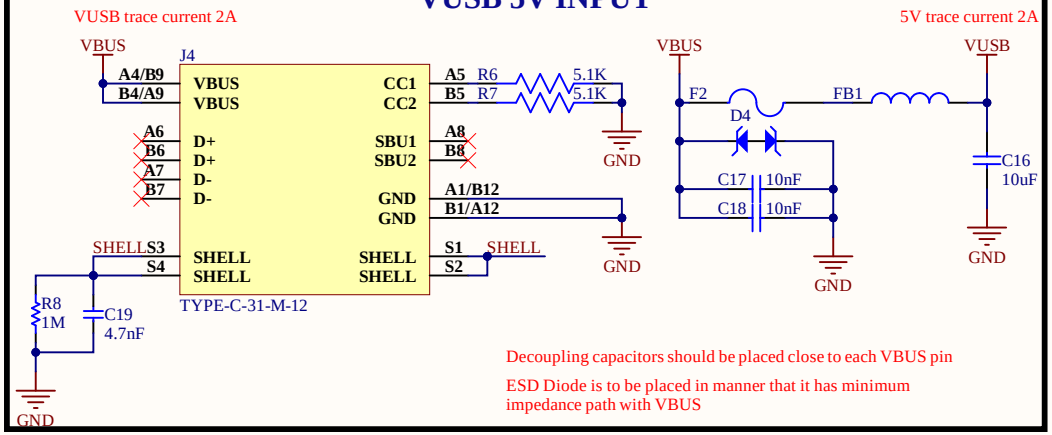

BATTERY INPUT



Ringer_Coil



Capacitor need to be updated
is this ok to use terminal block ?
Do we need to add snuber for Coil voltage suppresion


VUSB — VUSB
BATT — BATT
DC_Barrel_5V — DC_Barrel_5V

Ringer_Coil1 — Ringer_Coil1
Ringer_Coil2 — Ringer_Coil2


eSpark Consulting Group

Title: Connector_Sheet.SchDoc	
File: Telephone Circuit V1.0.PrjPcb	
Date: 26/12/2024	Page Num: 4
Drawn By: Huzaifa Ali	Page Total: 5

Ringer_PS_42V

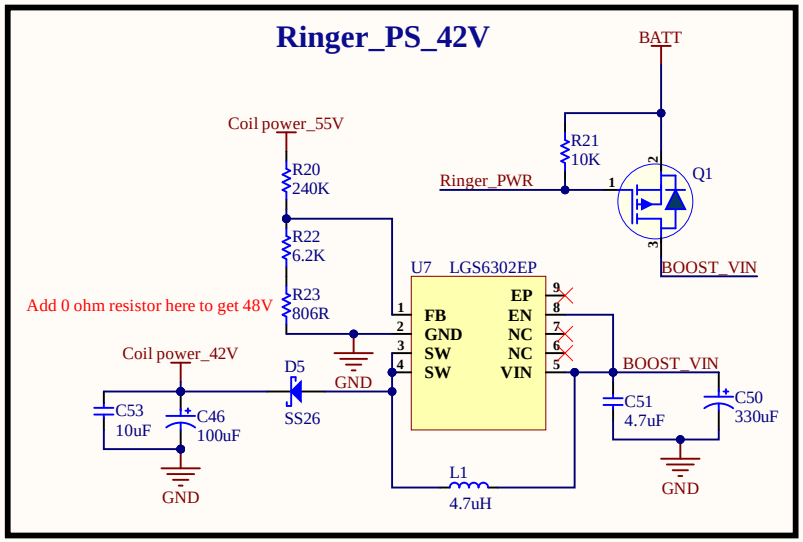

Ringer_Coil_Driver

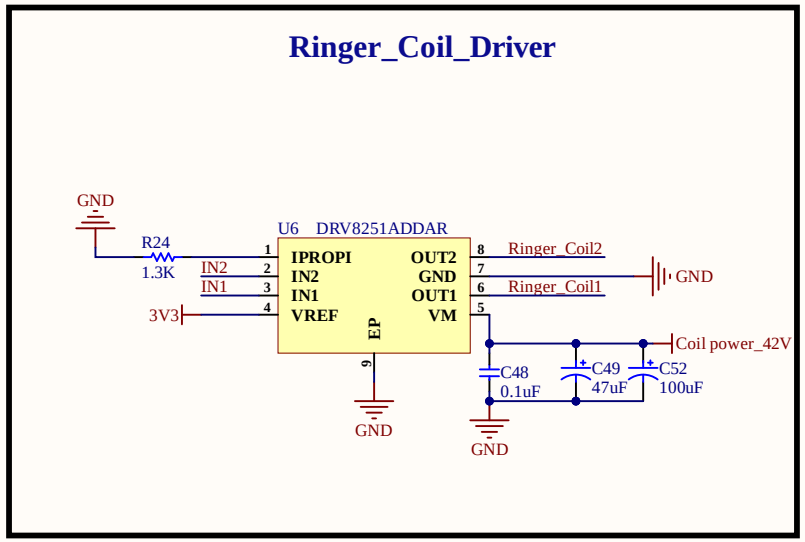

Ringer_Coil1 — Ringer_Coil1
Ringer_Coil2 — Ringer_Coil2

Ringer_PWR — Ringer_PWR
IN1 — IN1
IN2 — IN2

eSpark Consulting Group

Title: Ringer_Sheet.SchDoc	
File: Telephone Circuit V1.0.PrjPcb	
Date: 26/12/2024	Page Num: 5
Drawn By: Huzaifa Ali	Page Total: 5