
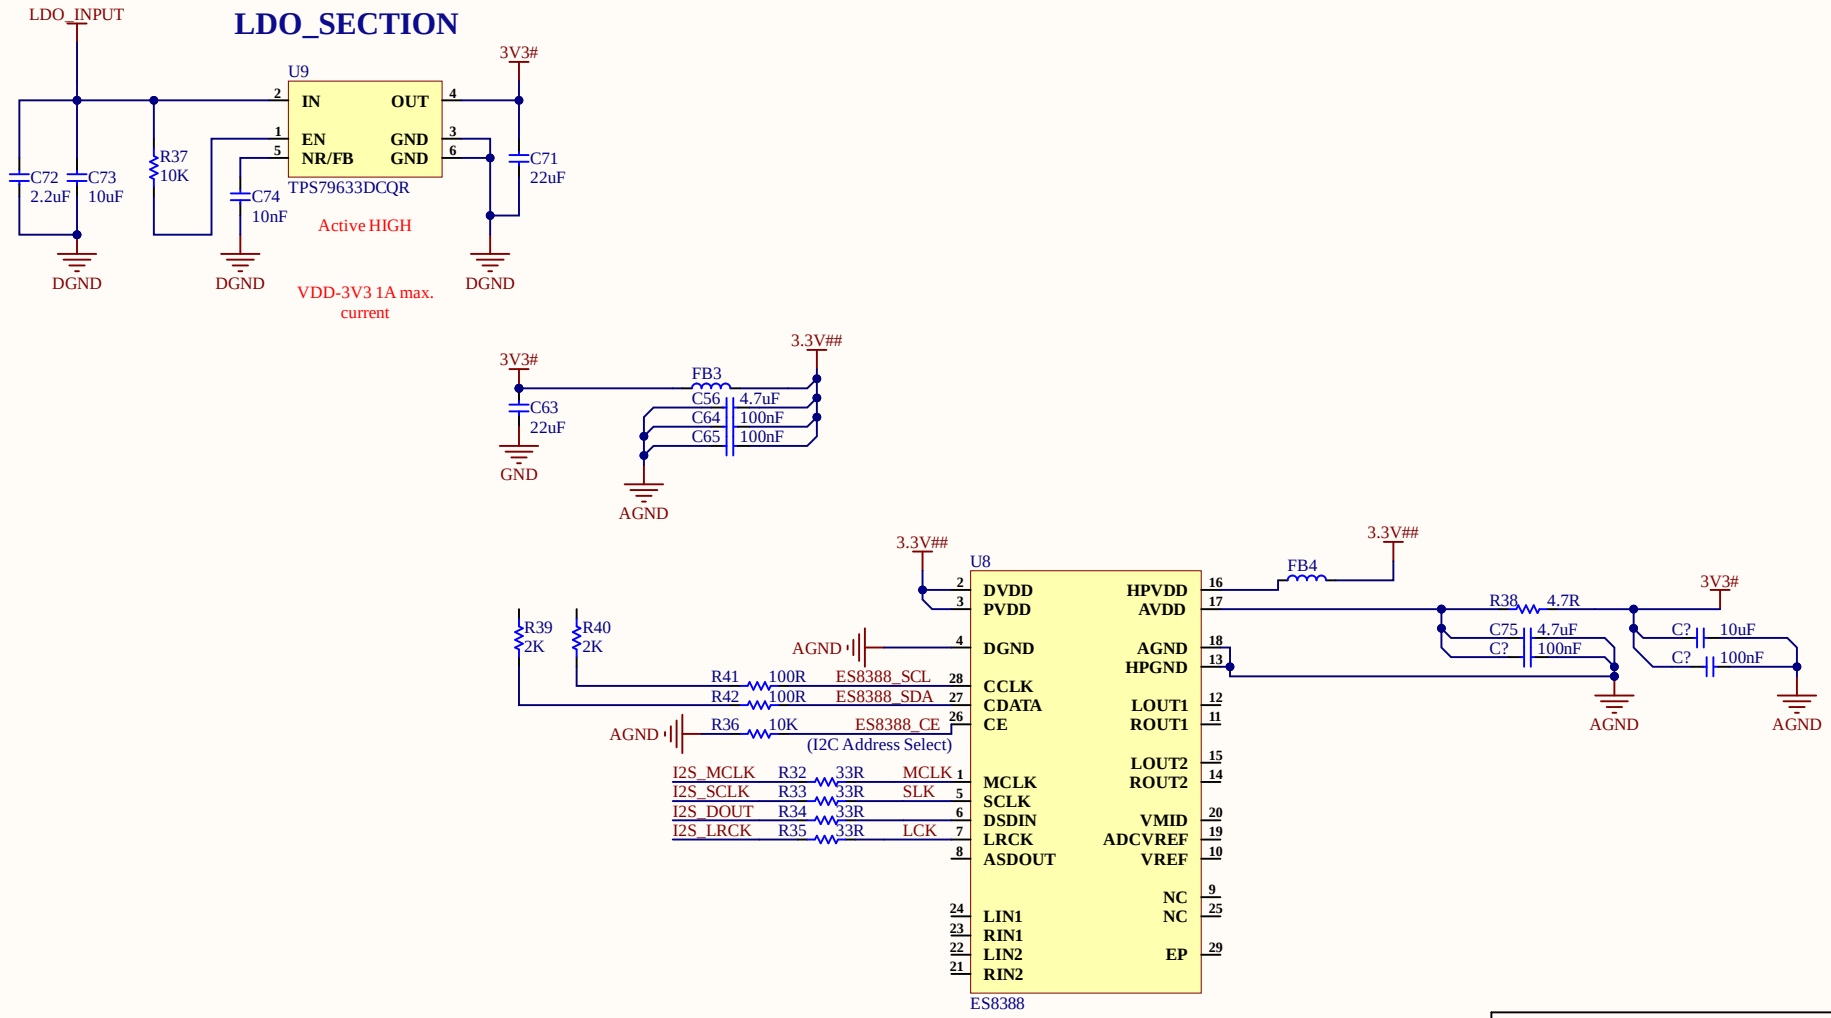



eSpark Consulting Group

Title: Audio Codec_Sheet.SchDoc	
File: Telephone Circuit V1.0.PrjPcb	
Date: 27/12/2024	Page Num: 6
Drawn By: Huzaifa Ali	Page Total: 6


DC BARREL JACK INPUT 5V

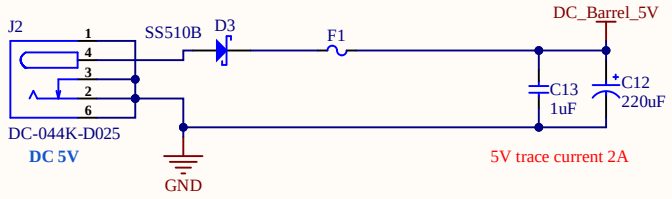


VUSB 5V INPUT

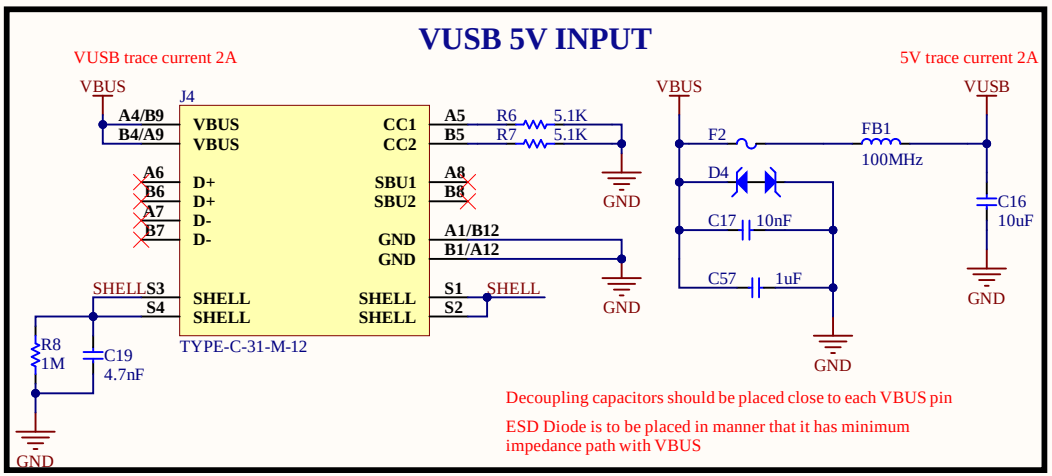


BATTERY INPUT




Ringer_Coil

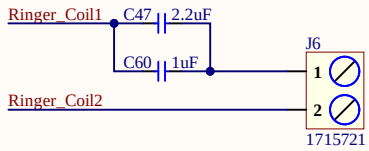


Rotary Dialer

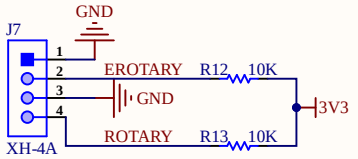



Headset Detection



Headset_Mic and Speaker











eSpark Consulting Group


Title: Connector_Sheet.SchDoc	
File: Telephone Circuit V1.0.PrjPcb	
Date: 27/12/2024	Page Num: 5
Drawn By: Huzaifa Ali	Page Total: 6






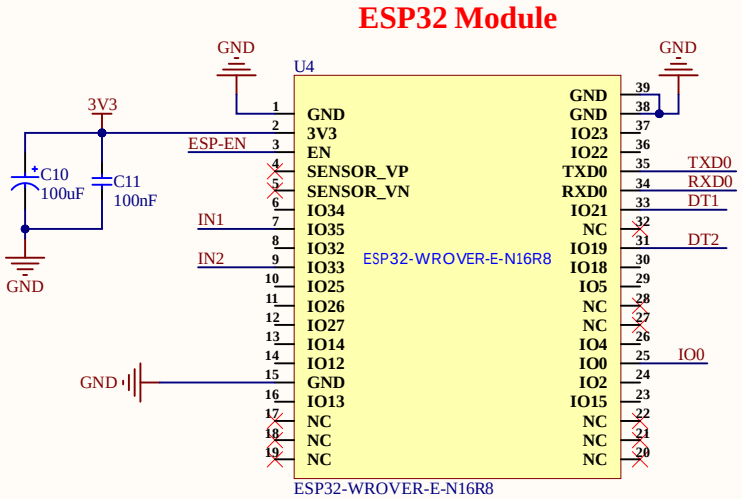







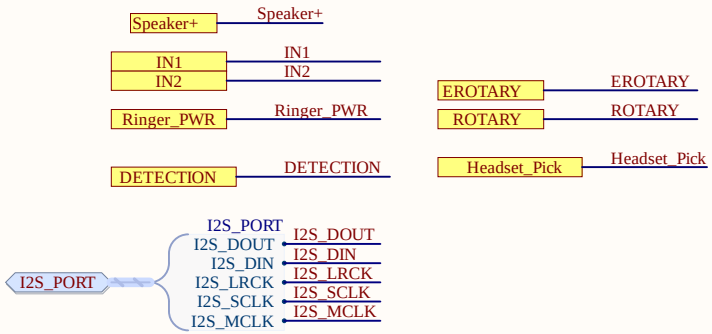

Title: Controller_Sheet.SchDoc	
File: Telephone Circuit V1.0.PrjPcb	
Date: 27/12/2024	Page Num: 2
Drawn By: Huzaifa Ali	Page Total: 6




POWER SUPPLY ORING CIRCUIT

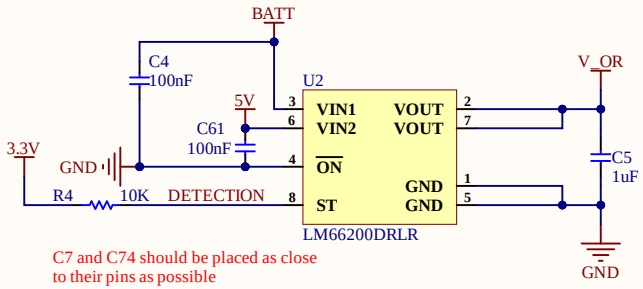

C7 and C74 should be placed as close to their pins as possible

The highest voltage supply is automatically selected. ST pin is used to detect which voltage is currently selected

BATTERY CHARGING CIRCUIT

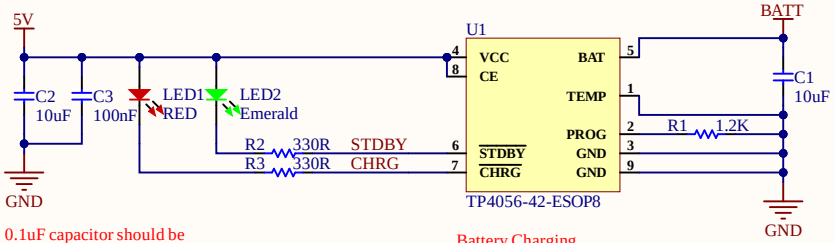



0.1uF capacitor should be placed closest to VCC pin

Place LED 2 close to USB port for visibility

Battery Charging current = 1000mA


LDO_SECTION

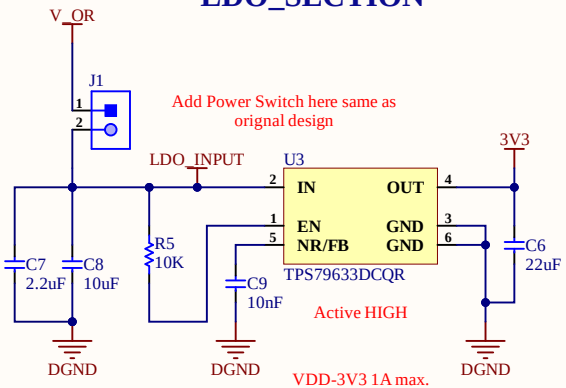





eSpark Consulting Group

Title: Power_Sheet.SchDoc	
File: Telephone Circuit V1.0.PrjPcb	
Date: 27/12/2024	Page Num: 1
Drawn By: Huzaifa Ali	Page Total: 6

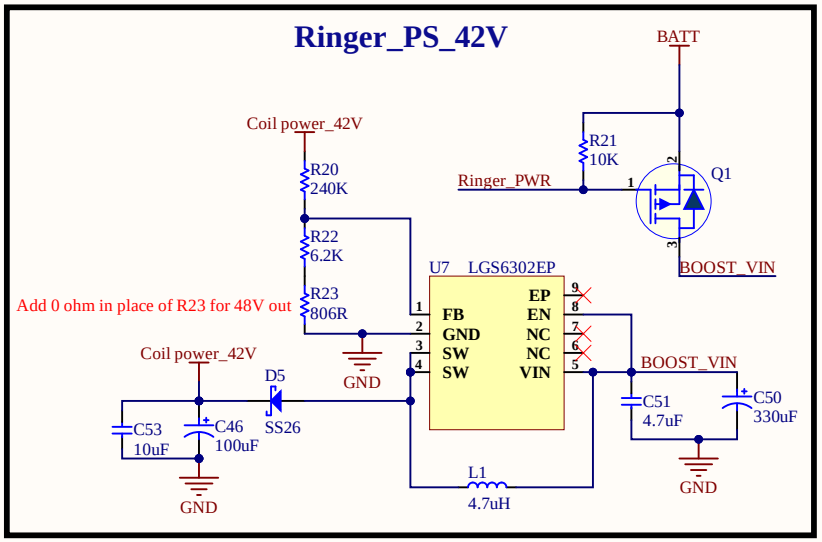

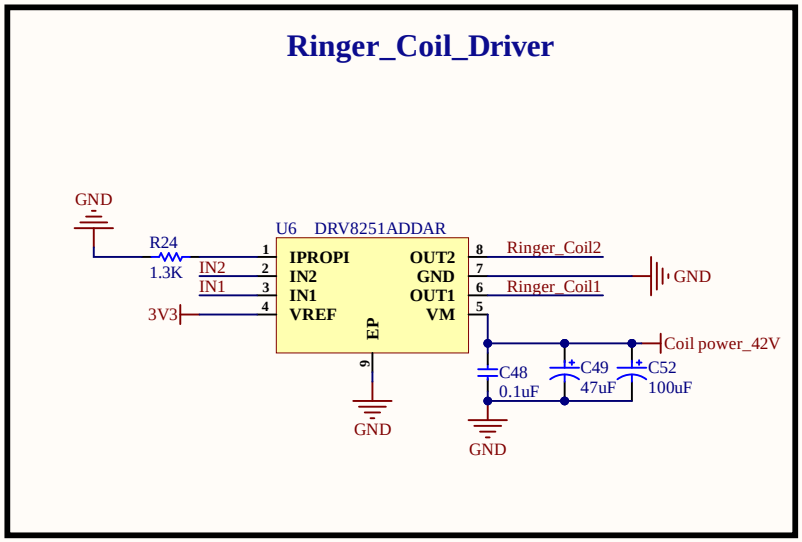



eSpark Consulting Group

Title: Ringer_Sheet.SchDoc		
File: Telephone Circuit V1.0.PrjPcb		
Date: 27/12/2024	Page	Num: 3
Drawn By: Huzaifa Ali	Page	Total: 6