

DECOUPLING CAPS

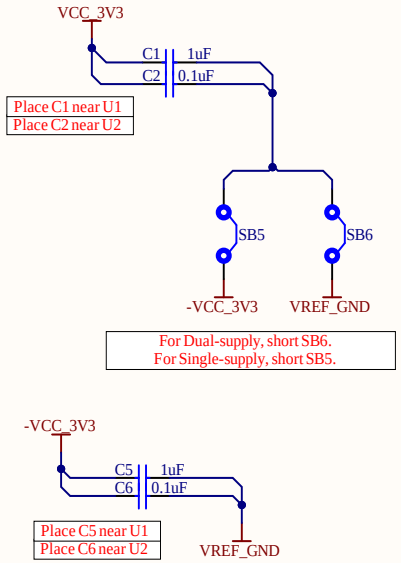


sEMG SENSOR

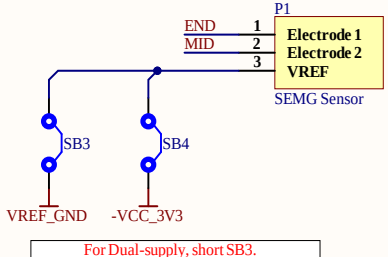

VREF_GND — VREF_GND
VCC_3V3 — VCC_3V3
-VCC_3V3 — -VCC_3V3
GND — GND

VREF input requires almost 50uA current. This would make the total current of 8 opamps equal to 400uA.

INSTRUMENTAL AMPLIFIER

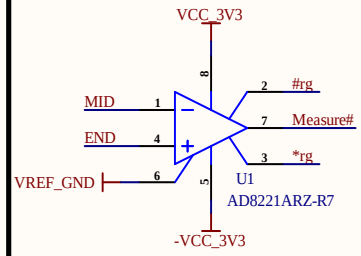


For Dual Supply Pin Configuration from J1 will be:
1=NC
2=Measure
3=GND
4=3.3V
5= -3.3V
6=NC

For Single Supply Pin Configuration from J1 will be:
1=NC
2=Measure
3=1.65V
4=3.3V
5=GND
6=NC

Supporting Component




SIGNAL SELECTION




Use SB7 for raw signal and SB8 for processed signal


SENSOR BOARD




FILTER OPAMPS

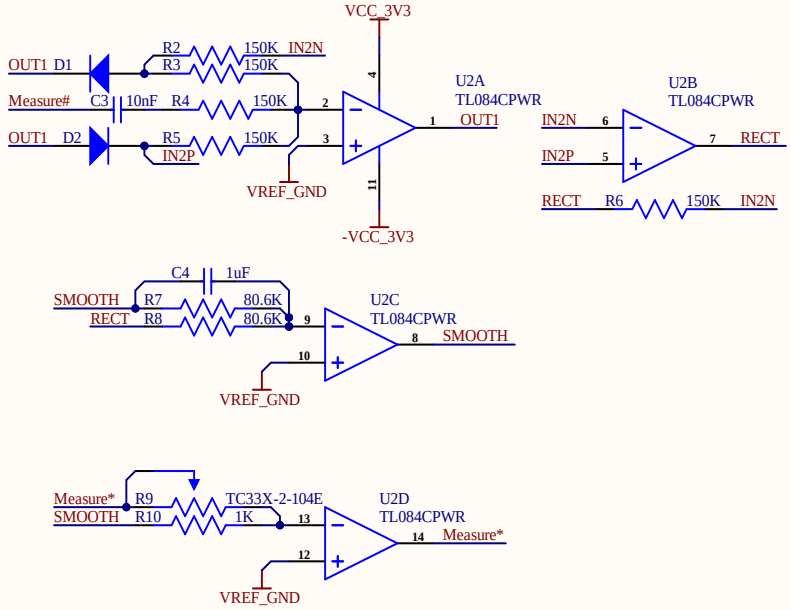


LED




Solder Bridges

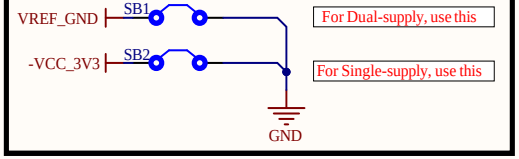



Cannot open file C:\Users\user\Pictures\Saved Pictures\espark-consulting-group-150x150.jpg. File does not exist.

Title	Electrode_Board_v2.1.PrjPcb		
Size	Number		Revision
A4	1		1
Date:	6/06/2023	Sheet 1 of	1
File:	C:\Users\..\OpAmp_Sheet.SchDoc	Drawn By:	Huzaifa Ali

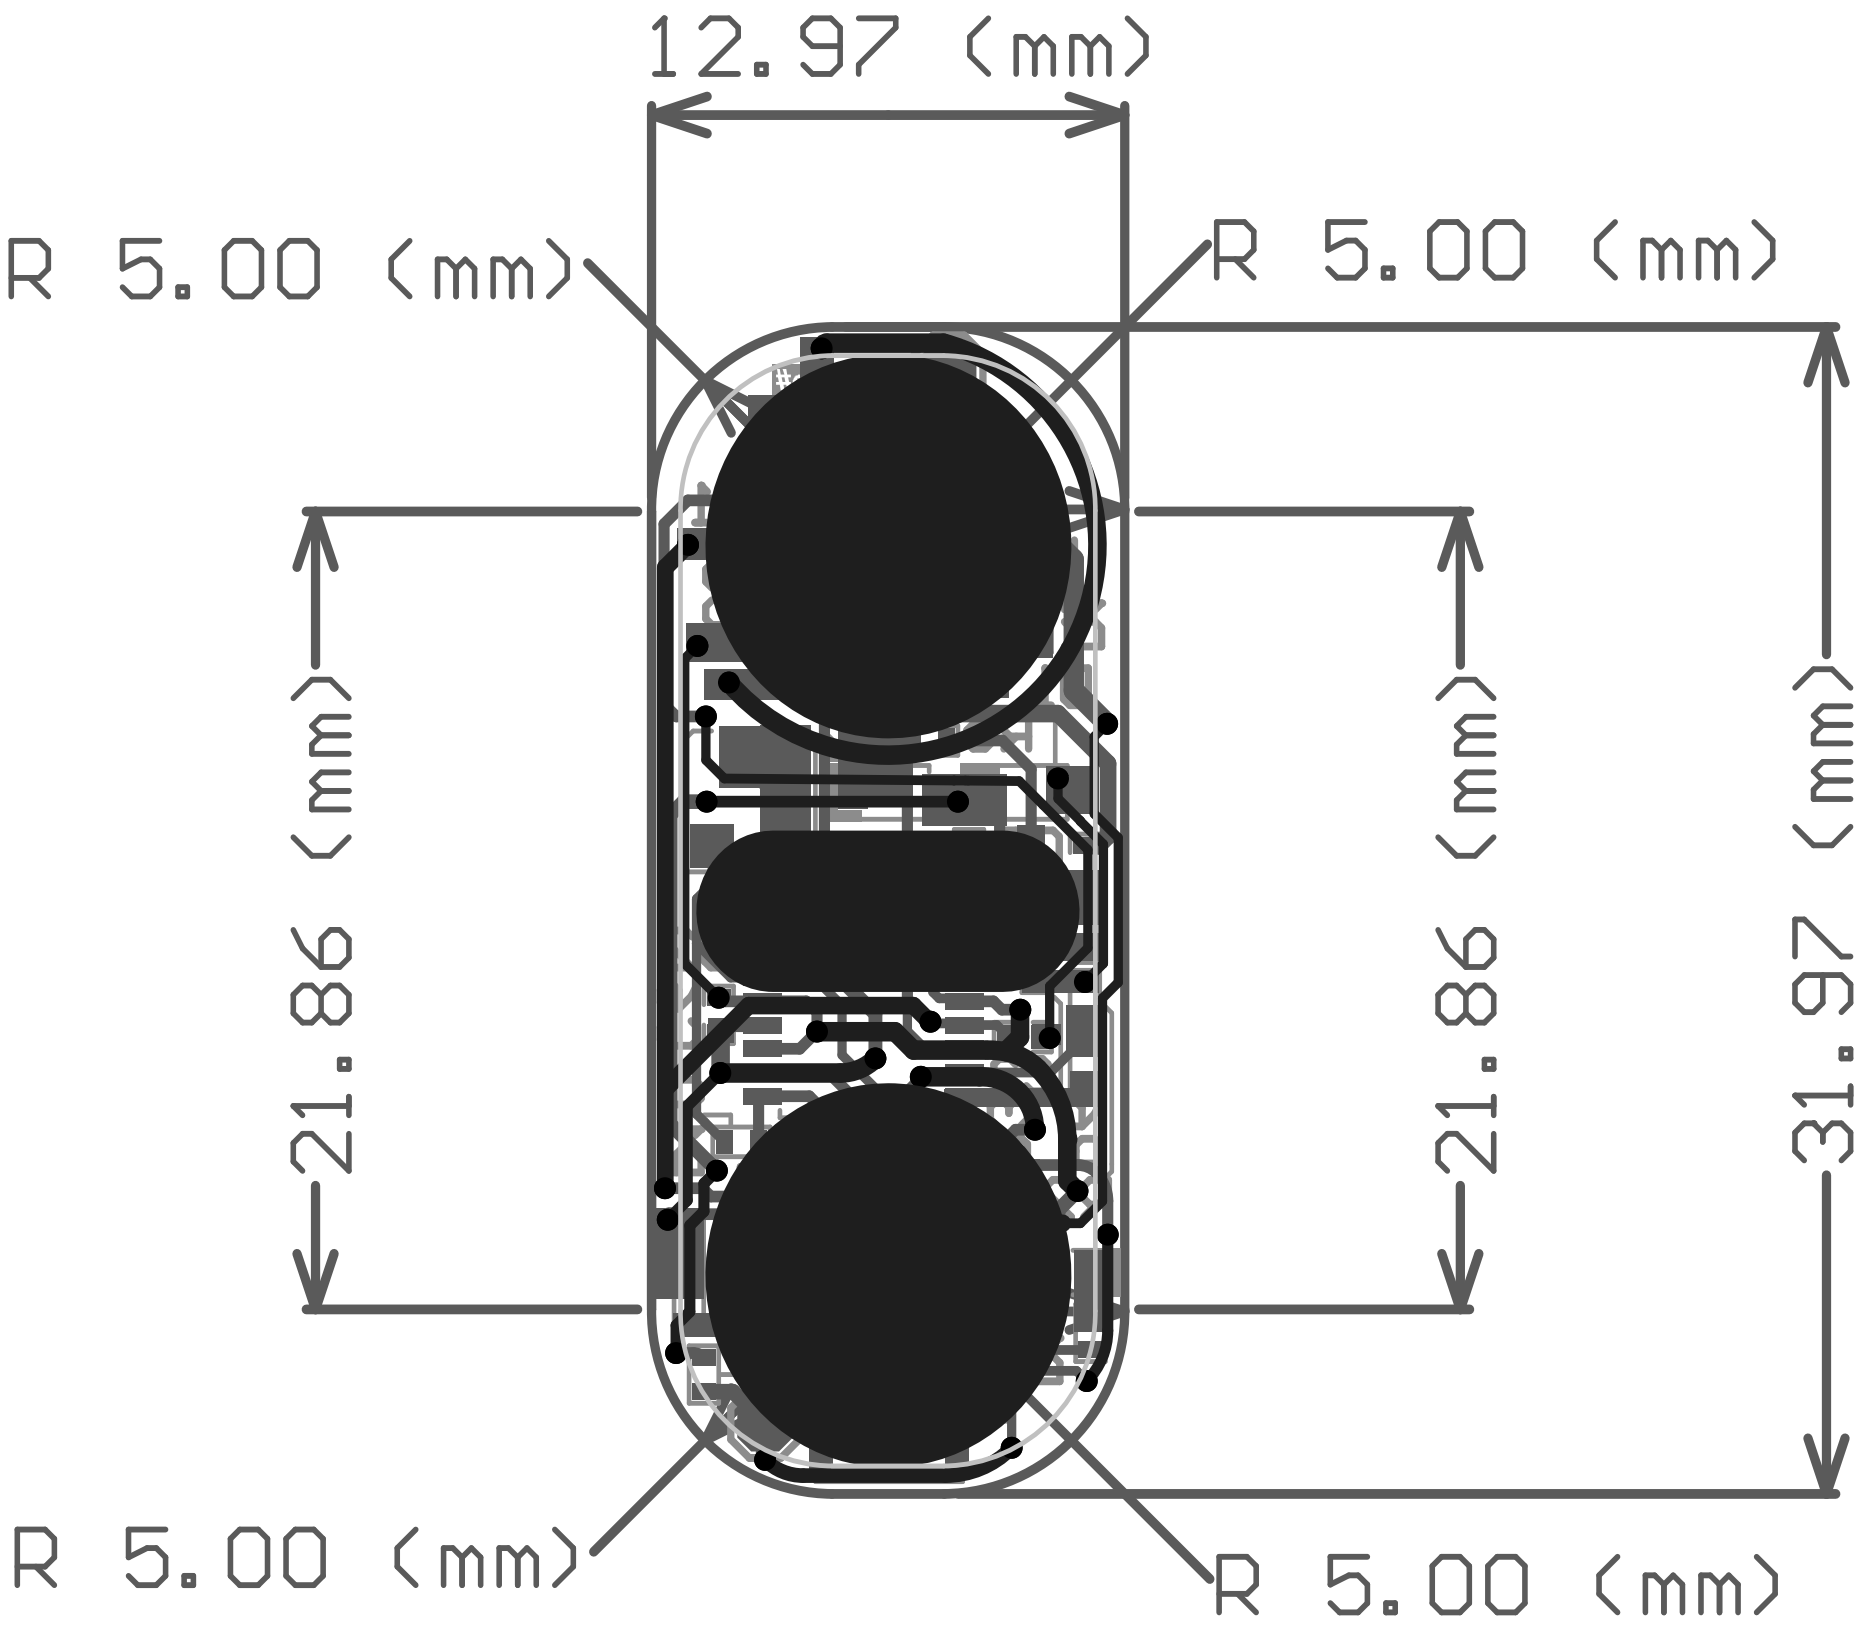
12.97 (mm)
R 5.00 (mm)
R 5.00 (mm)
21.86 (mm)
21.86 (mm)
31.97 (mm)
R 5.00 (mm)
R 5.00 (mm)