

DECOUPLING CAPS




INSTRUMENTAL AMPLIFIER




VREF input requires almost 50uA current. This would make the total current of 8 opamps equal to 400uA.

Supporting Component




SENSOR BOARD





6-pin FPC with longer pads is used to allow soldering strength. Ribbon cable will be hand soldered here and FPC will be DO NOT Mount

sEMG SENSOR




FILTER OPAMPS

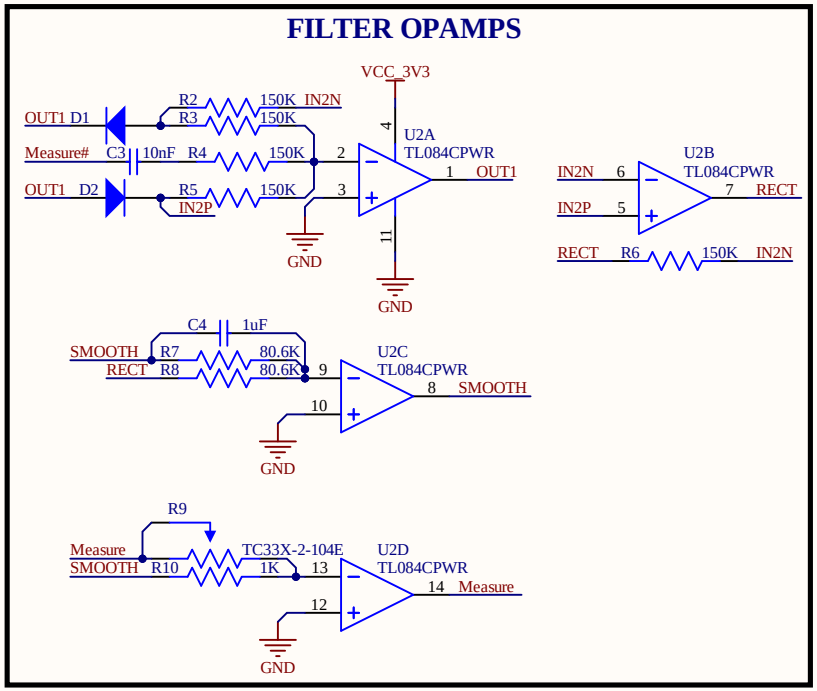



Cannot open file C:\Users\user\Pictures\Saved Pictures\espark-consulting-group-150x150.jpg. File does not exist.

Title: Electrode_Board.PrjPcb		
Size: A4	Number: 1	Revision: 1
Date: 7/07/2022	Sheet 1 of 1	
File: E:\ManarHarake-sEMGDevice\..\OpAmp_Sheet.SchDoc	Drawn By: Huzaifa Ali	

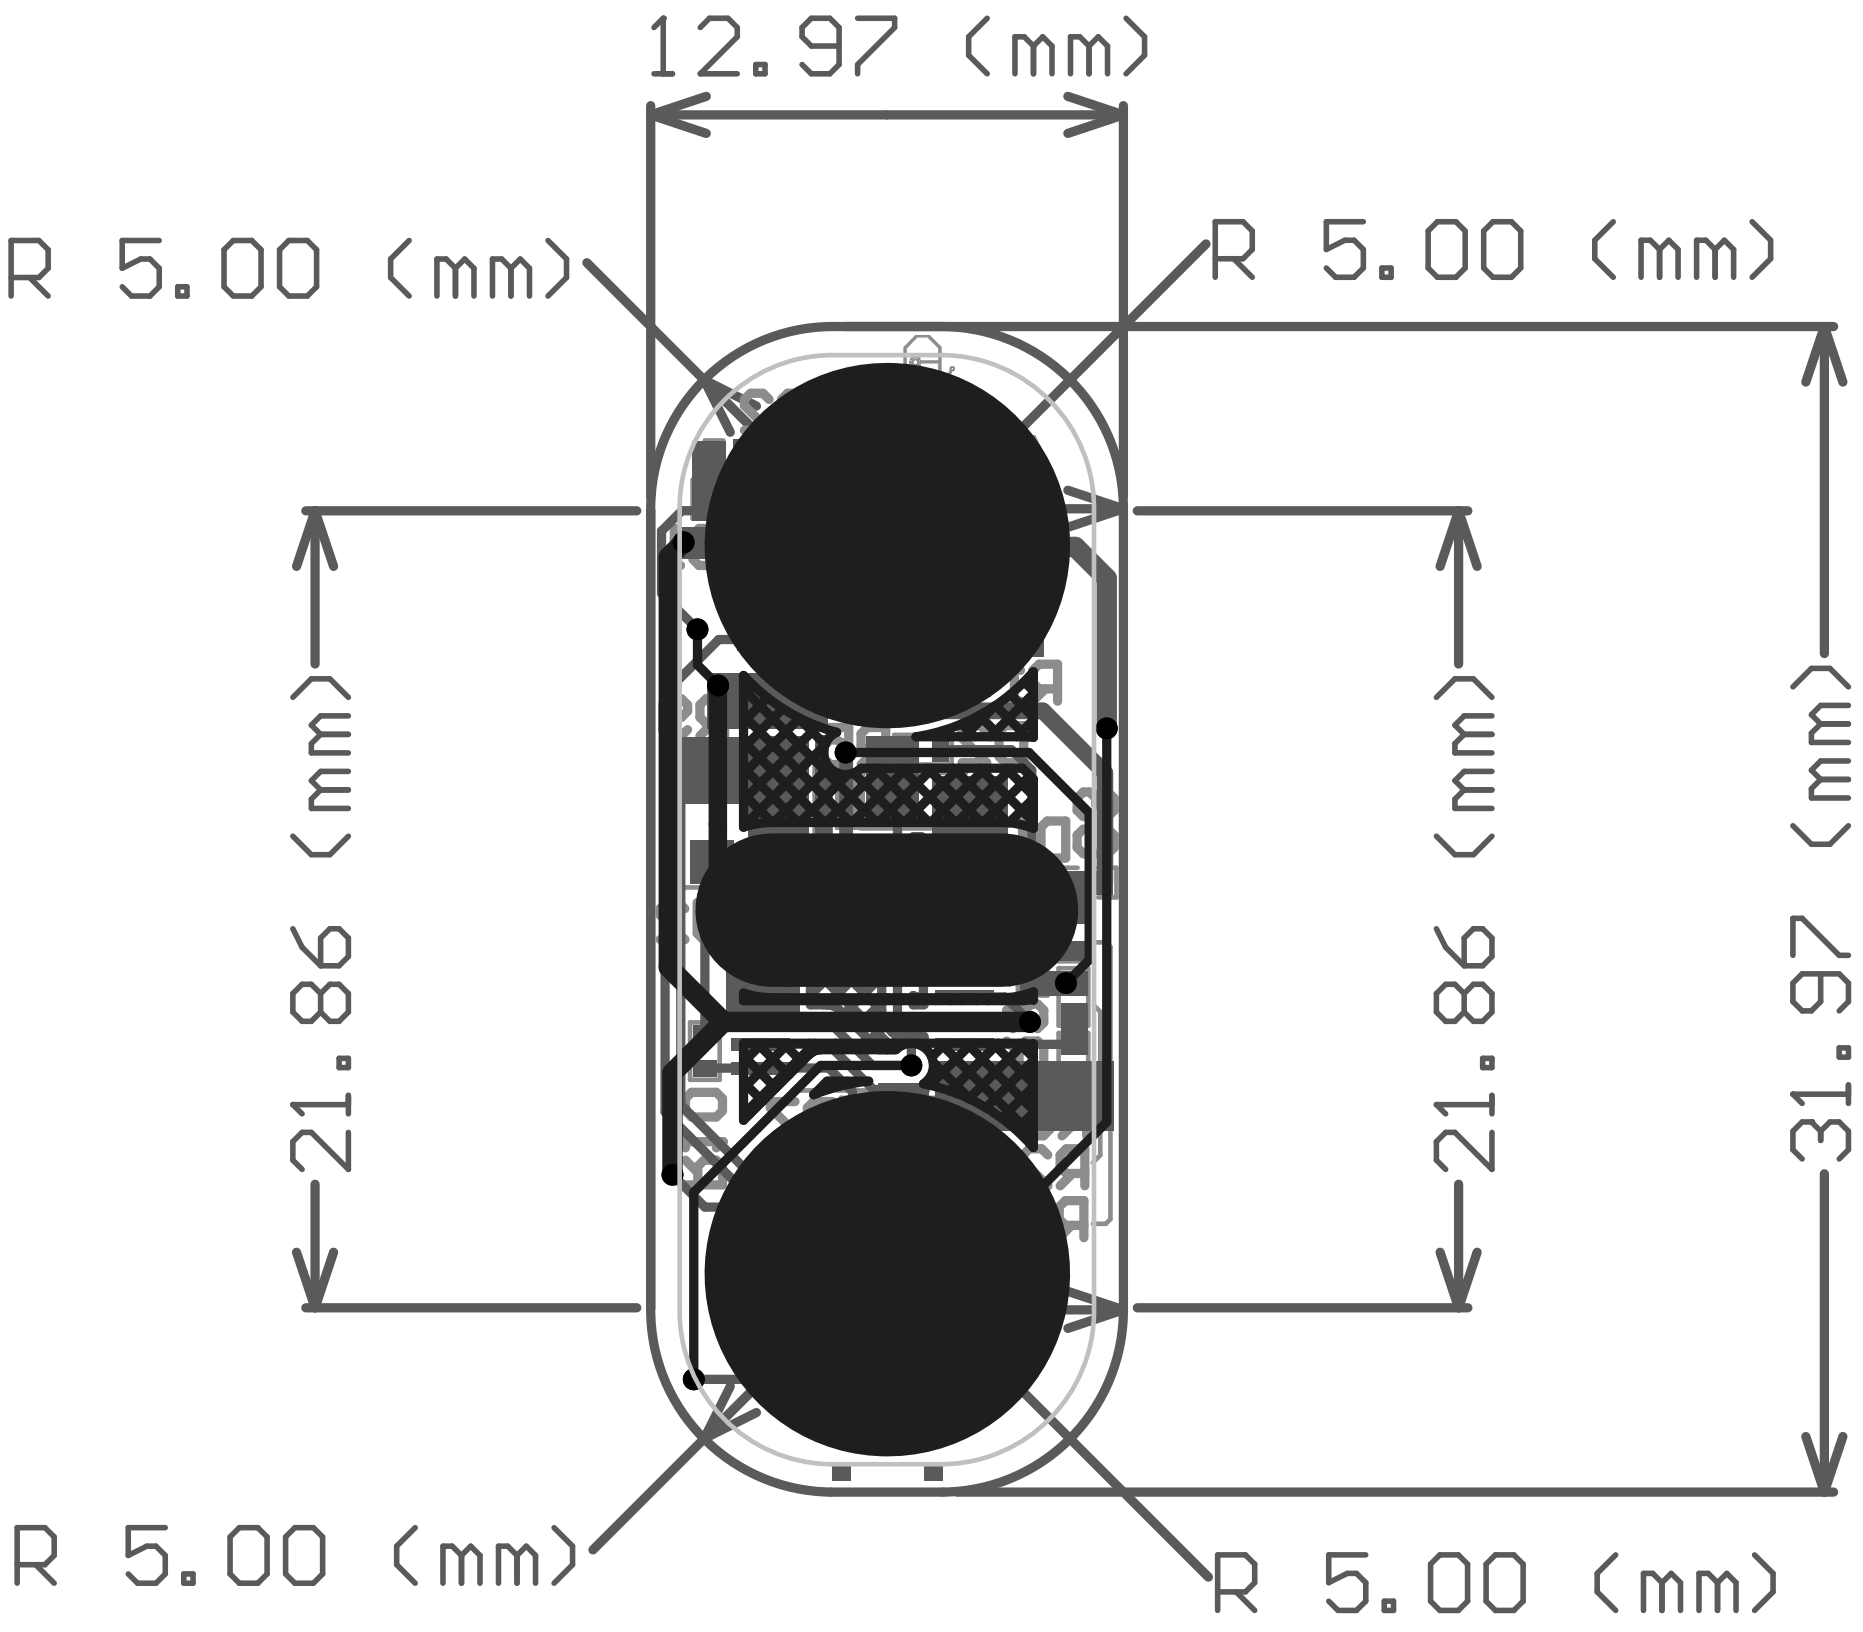
12.97 (mm)
R 5.00 (mm)
R 5.00 (mm)
21.86 (mm)
21.86 (mm)
31.97 (mm)
R 5.00 (mm)
R 5.00 (mm)