

DECOUPLING CAPS




INSTRUMENTAL AMPLIFIER

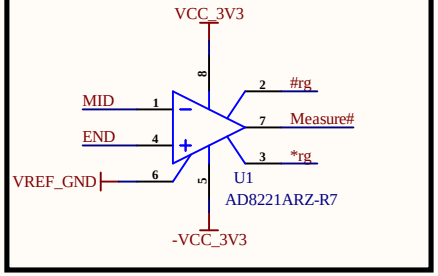


VREF input requires almost 50uA current. This would make the total current of 8 opamps equal to 400uA.


Supporting Component




SENSOR BOARD




sEMG SENSOR




FILTER OPAMPS

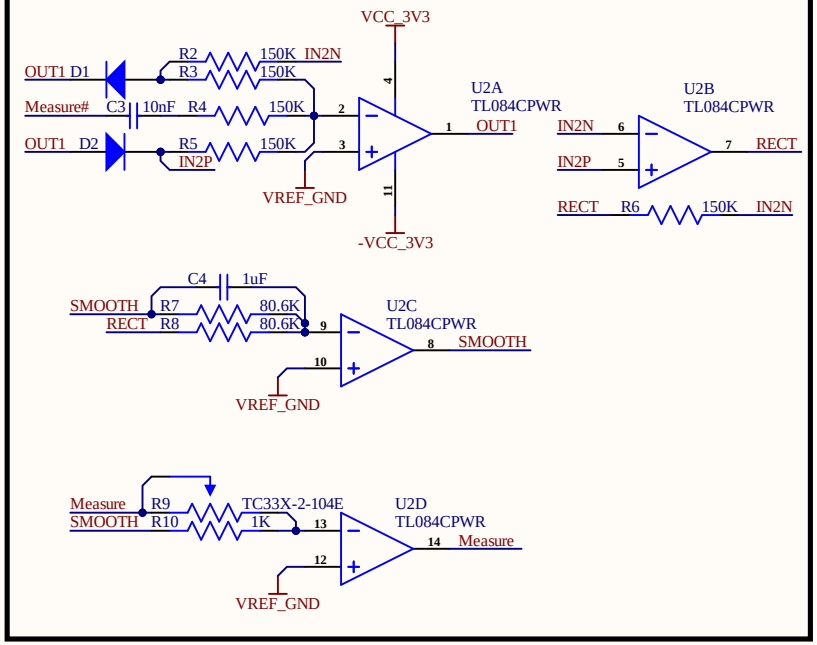



LED



Solder Bridges

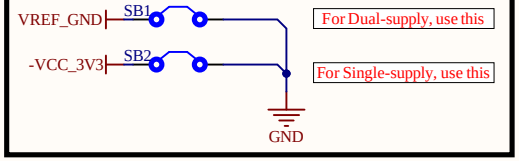





Cannot open file C:\Users\user\Pictures\Saved Pictures\espark-consulting-group-150x150.jpg. File does not exist.

Title: Electrode_Board.PrjPcb		
Size: A4	Number: 1	Revision: 1
Date: 1/31/2023	Sheet 1 of 1	
File: E:\ManarHarake-sEMGDevice\..\OpAmp_Sheet.SchDoc	Drawn By: Huzaifa Ali	

Layer	Name	Material	Thickness	Constant	Board Layer Stack
	Top Overlay				
	Top Solder	Solder Resist	3.00mil	3.5	
1	Top Layer		9.00mil		
	Dielectric 1	FR-4	16.00mil	4.8	
2	Bottom Layer		9.00mil		
	Bottom Solder	Solder Resist	3.00mil	3.5	
	Bottom Overlay				

