

DECOUPLING CAPS

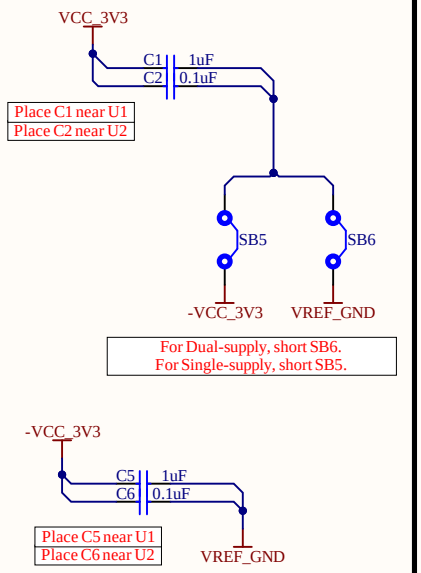

VREF input requires almost 50uA current. This would make the total current of 8 opamps equal to 400uA.


INSTRUMENTAL AMPLIFIER

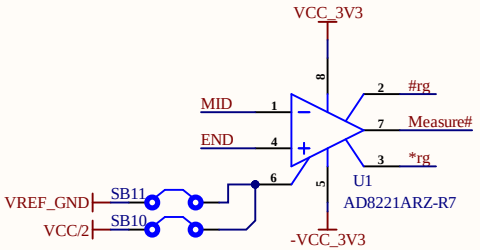

For Dual Supply Pin Configuration from J1 will be:
1=GND
2=-VCC_3V3
3=VCC_3V3
4=Measure


For Single Supply Pin Configuration from J1 will be:
1=VREF_GND [Reference Voltage]
2=GND
3=VCC_3V3
4=Measure

SIGNAL SELECTION




Use SB7 for raw signal and SB8 for processed signal


Supporting Component




FILTER OPAMPS

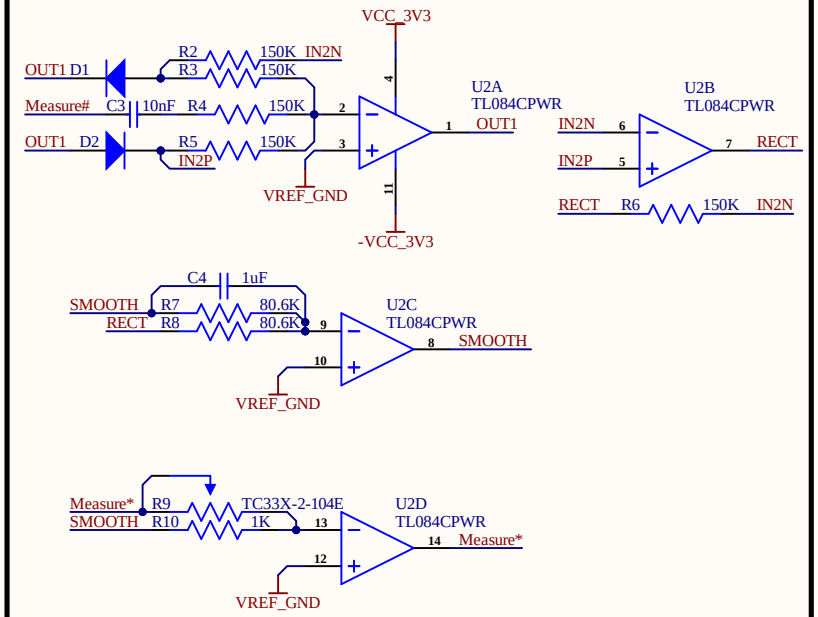


SENSOR BOARD

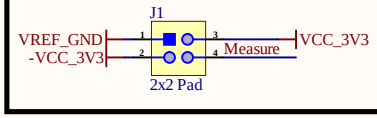


sEMG SENSOR

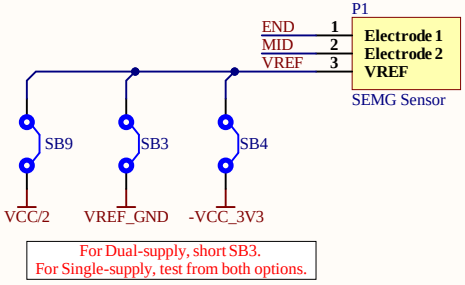


LED

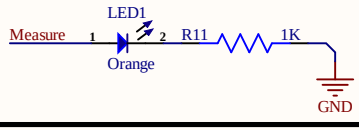



Solder Bridges

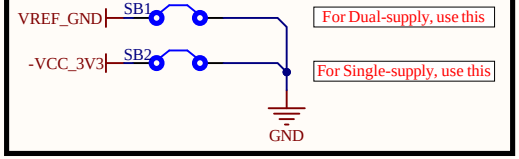

Voltage Divider

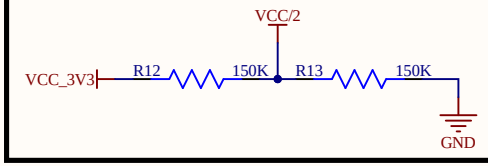





Cannot open file C:\Users\user\Pictures\Saved Pictures\espark-consulting-group-150x150.jpg. File does not exist.

Title	Electrode_Board_v4.0.1.PrjPcb		
Size	Number		Revision
A4	1		1
Date:	6/26/2024	Sheet 1 of	1
File:	C:\Users\..\OpAmp_Sheet.SchDoc	Drawn By:	Huzaifa Ali