

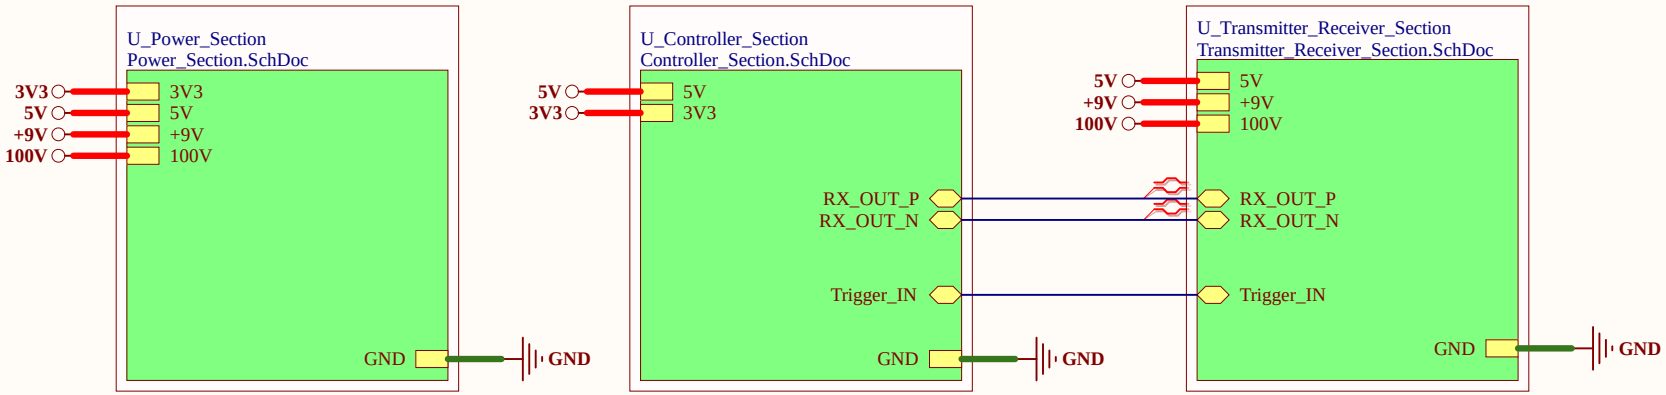


Title		
Size: A	Number	Revision
Date: 1/26/2024		Sheet of
File: C:\Users\..\Top_sheet.SchDoc		Drawn By:


MAIN POWER INPUT 9V




+9V TO -9V CONVERSION

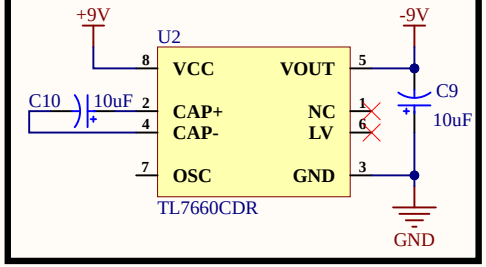

5V REGULATOR

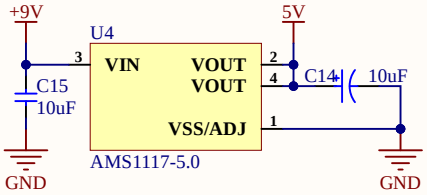


3V3 BUCK REGULATOR

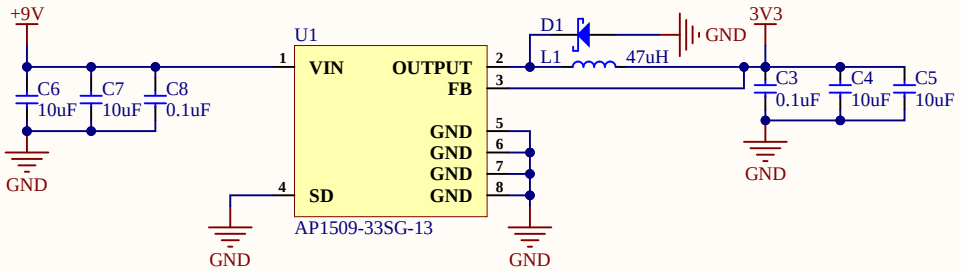


Output Load Current: 2A

100V BOOST REGULATOR

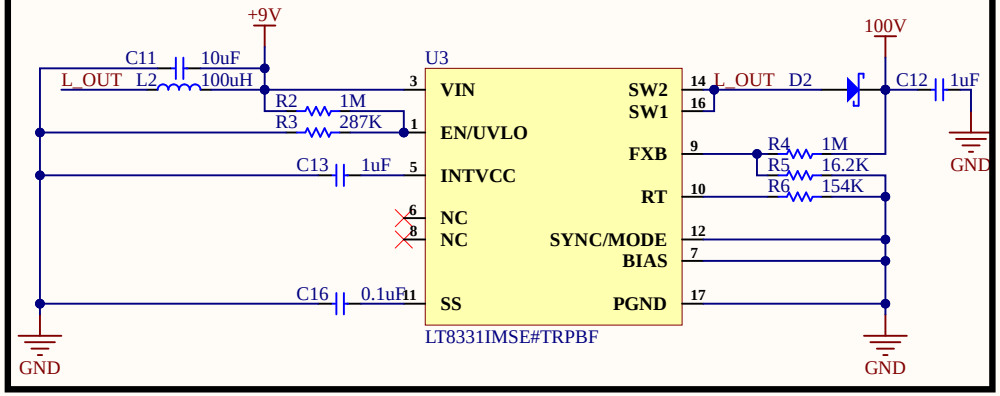



LT8331EMSE#TRPBF is out of stock from lcsc, may I used alternates [LT8331IMSE#TRPBF](stock = 105)
The Differnece between them is Operating juction temperature.


Connections in given schematic were different from reference schematic for R2 and C13.
Reference schematic from datasheet is followed for R2 and C13 connection




Title		
Size: A	Number	Revision
Date: 1/26/2024		Sheet of
File: C:\Users\..\Power_Section.SchDoc		Drawn By:

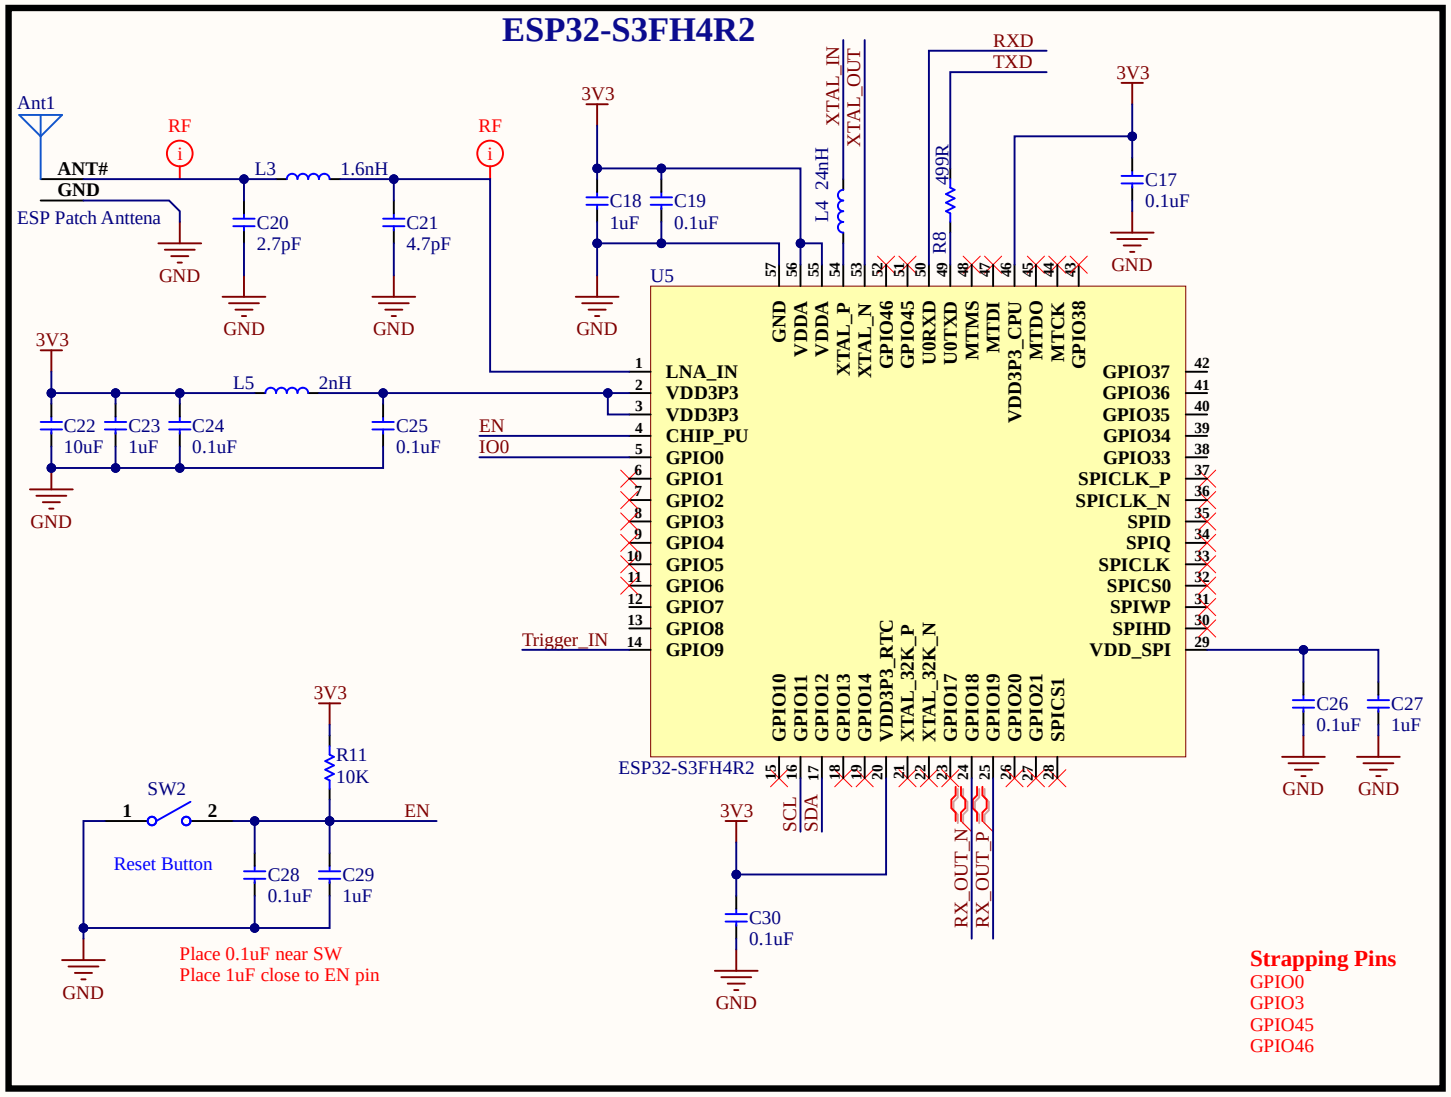

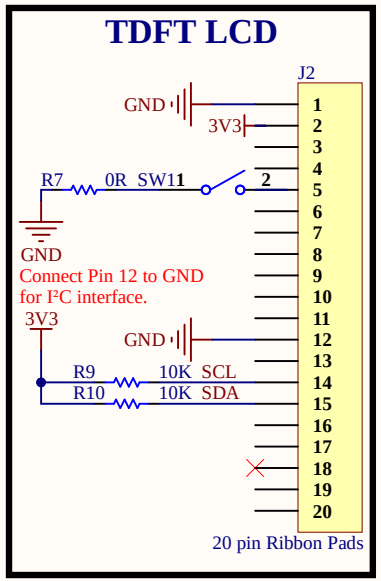

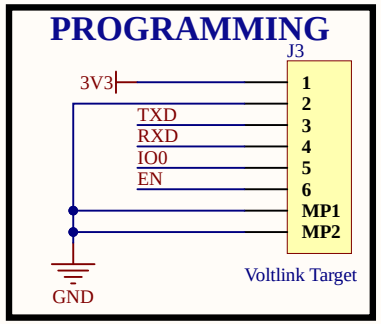

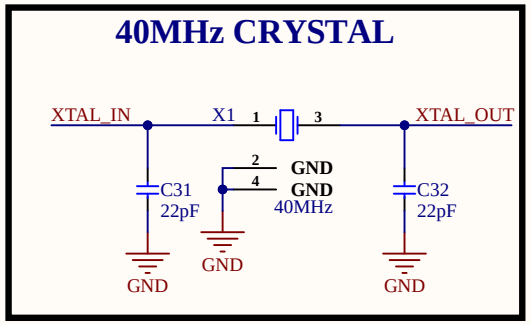




Title		
Size A	Number	Revision
Date: 1/26/2024		Sheet of
File: C:\Users\..\Controller_Section.SchDoc		Drawn By:

TRANSMITTER CIRCUIT


Trigger_IN through capacitor is given to input B,
otherwise in given reference schematic it is gounded through capacitor.

3kOhm (0.25W), 10kOhm (0.25W) and 50Ohm (1W) Required ratting mention in link

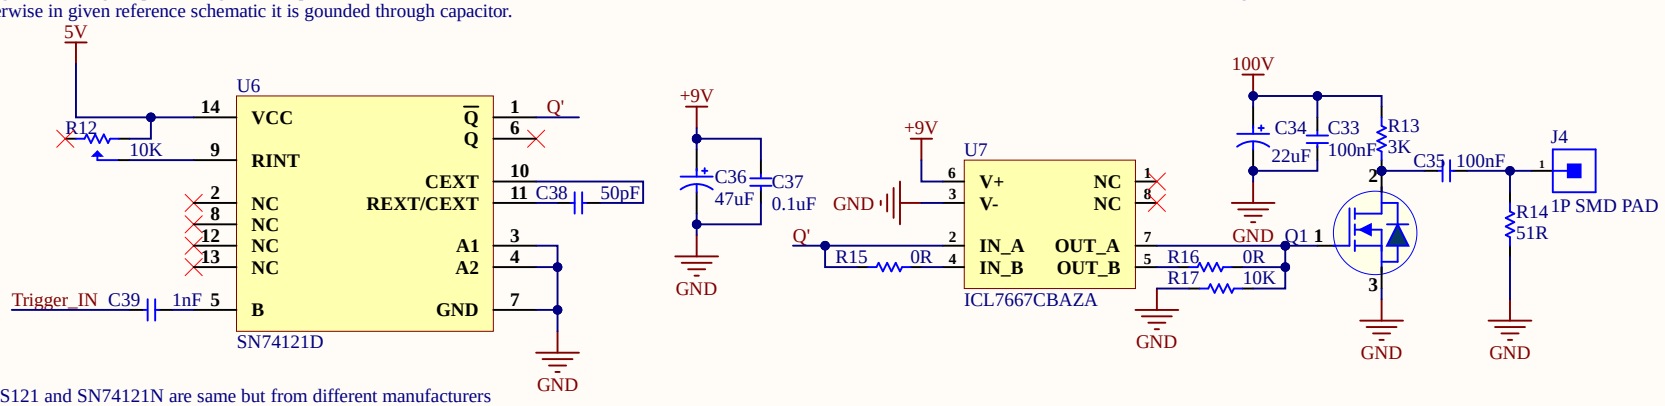

74LS121 and SN74121N are same but from different manufacturers

RECEIVER CIRCUIT

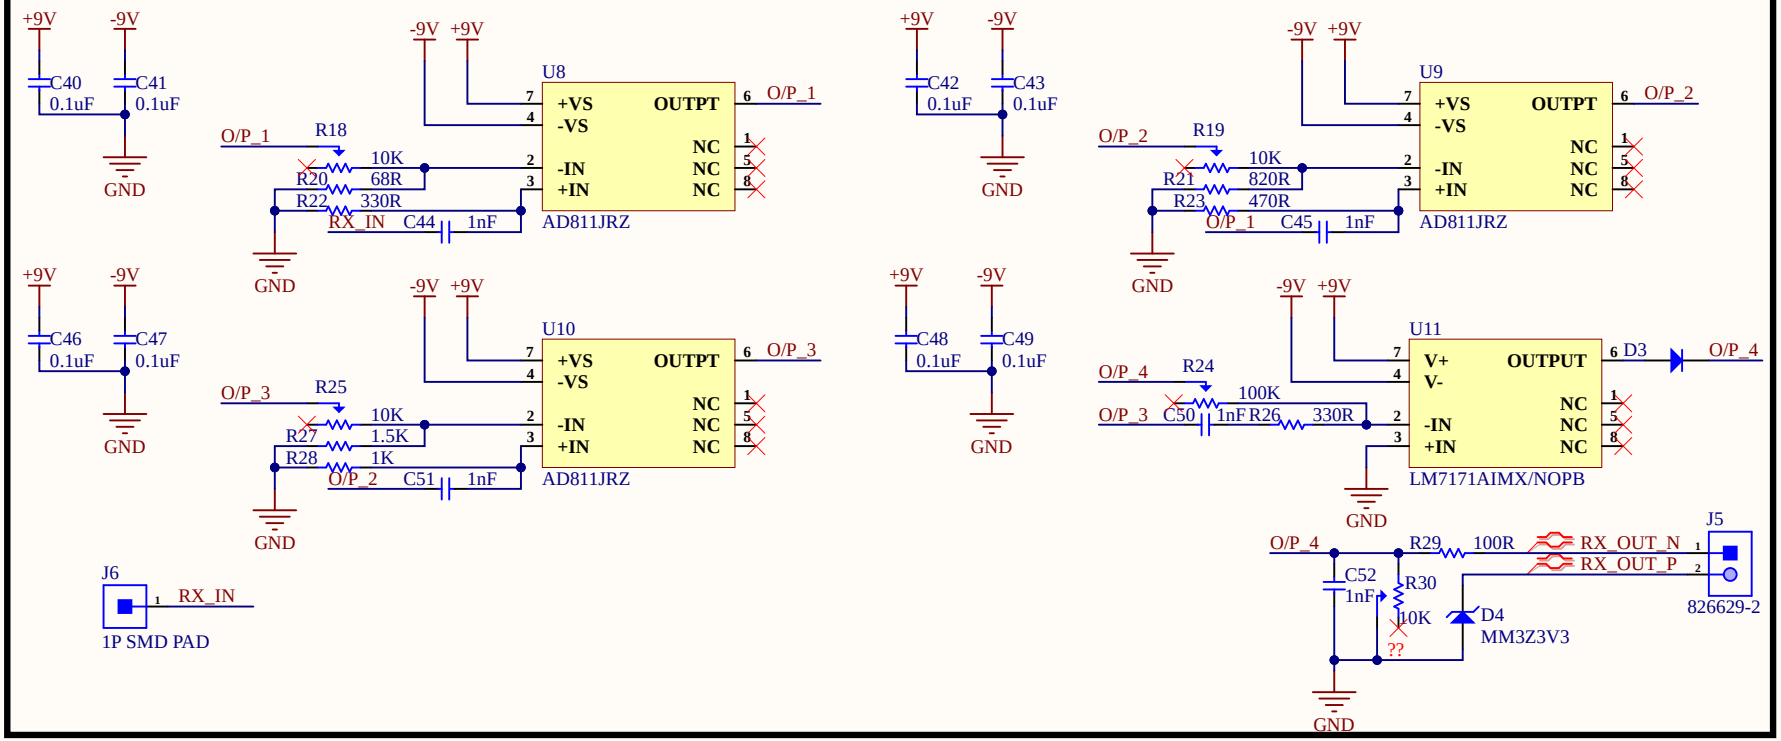

RX_OUT_N RX_OUT_N
RX_OUT_P RX_OUT_P

Trigger_IN Trigger_IN

5V 5V
+9V +9V
100V 100V
GND GND

Title		
Size: A	Number	Revision
Date: 1/26/2024	Sheet of	
File: C:\Users\..\Transmitter_Receiver_Section.SchDoc	Drawn By:	