



eSpark Consulting Group


Title: Top-Sheet.SchDoc	
File: 24V-7A-Power-Board-v1.0.PrjPcb	
Date: 10/15/2024	Page Num: 1
Drawn By: Huzaifa Ali	Page Total: 4


NOTE:

A 75mm x 30mm x 2.54mm heatsink is applied to D4, D1 & Q2

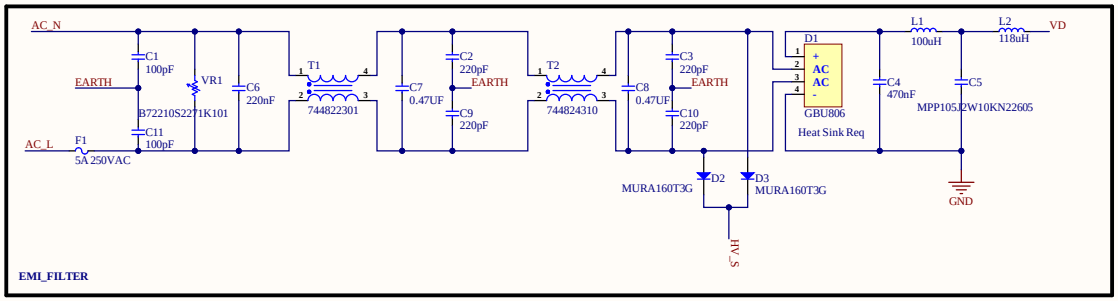

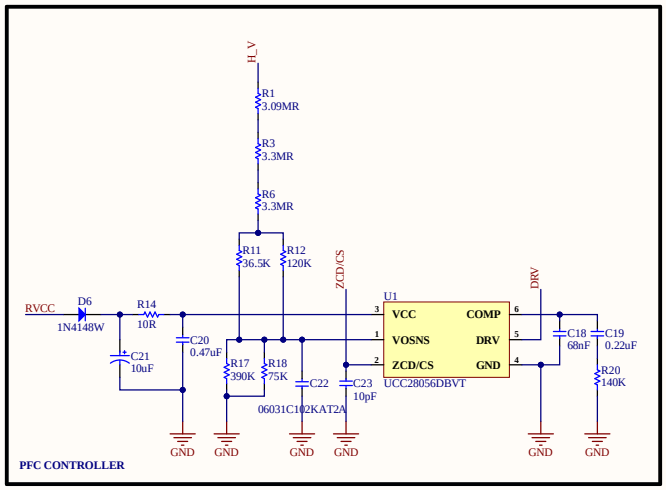

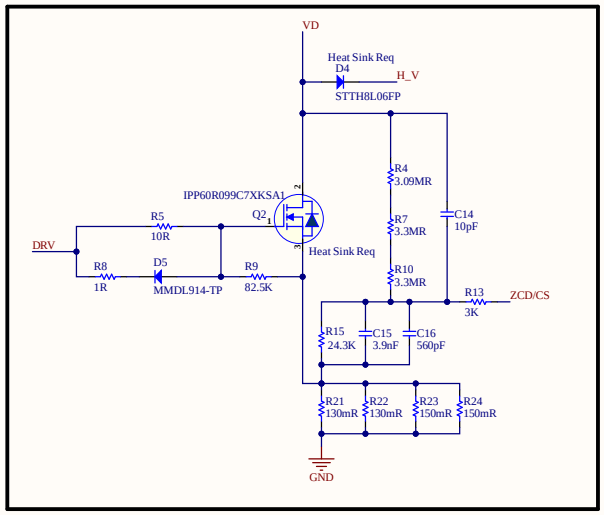

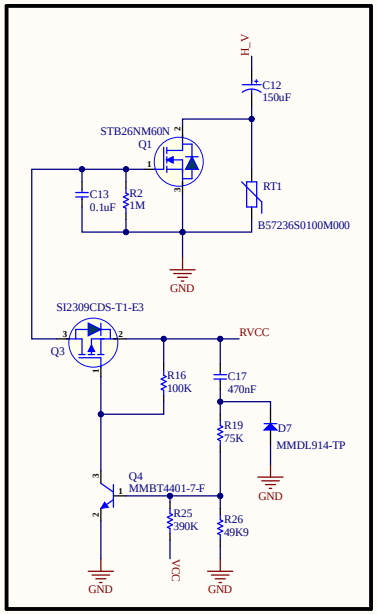

HV_S — HV_S

H_V — H_V

RVCC — RVCC

VCC — VCC


AC_L — AC_L


EARTH — EARTH


AC_N — AC_N


eSpark Consulting Group

Title: PFC-Sheet.SchDoc	
File: 24V-7A-Power-Board-v1.0.PrjPcb	
Date: 10/25/2024	Page Num: 2
Drawn By: Huzaifa Ali	Page Total: 4

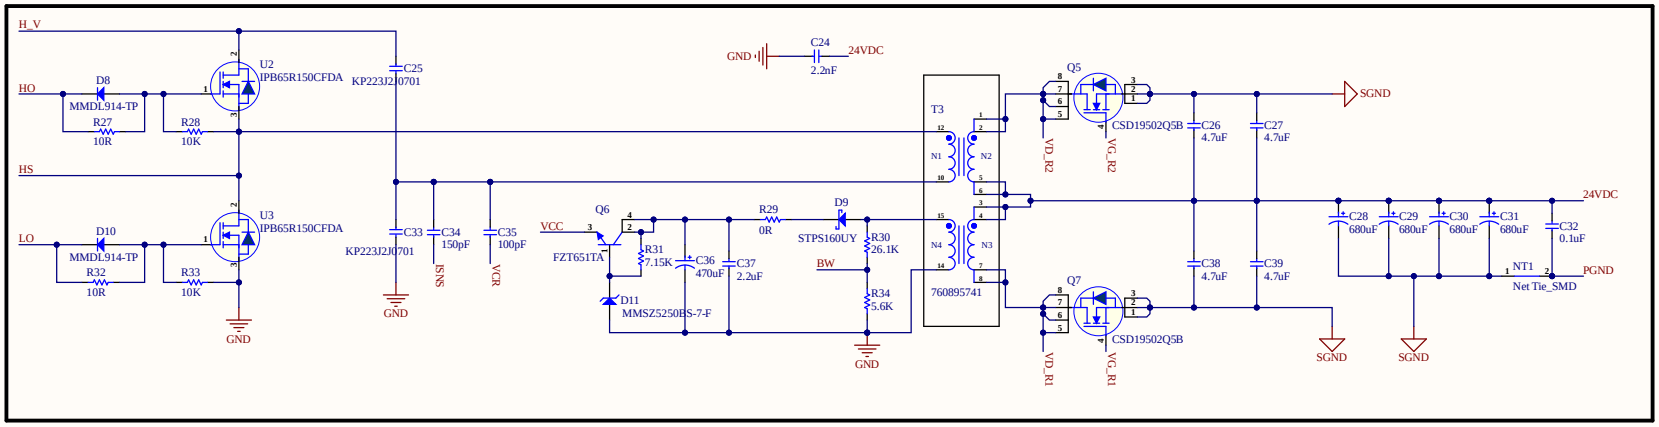

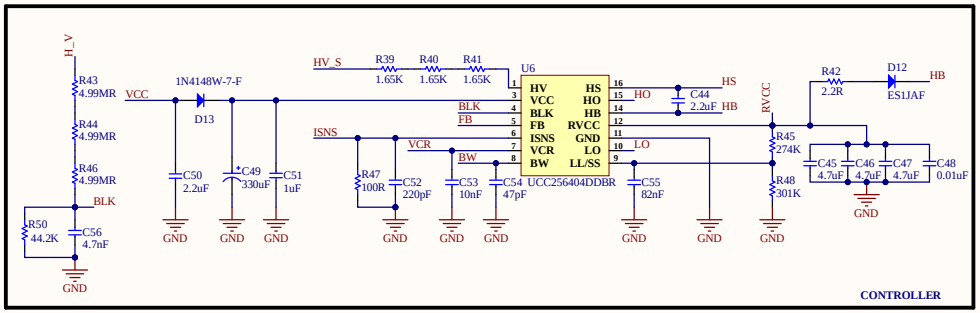

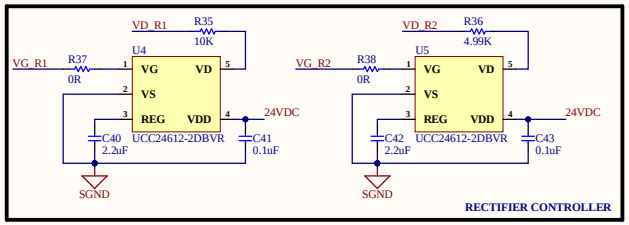

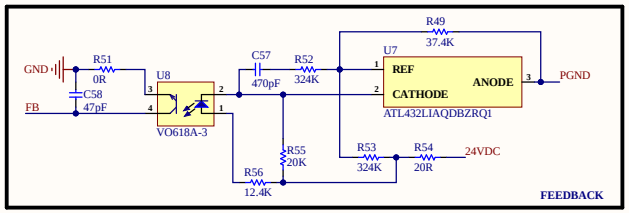

24VDC — 24VDC

PGND — PGND


HV_S — HV_S

H_V — H_V


RVCC — RVCC

VCC — VCC


Title: Power_Controller-Sheet.SchDoc	
File: 24V-7A-Power-Board-v1.0.PrjPcb	
Date: 10/25/2024	Page Num: 3
Drawn By: Huzaifa Ali	Page Total: 4




AC 110 ~ 230 VAC In

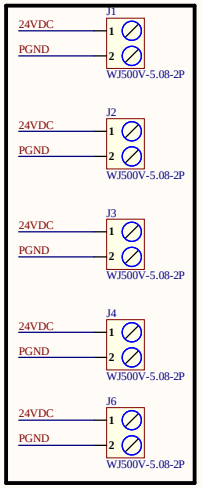

24VDC 7A Out





eSpark Consulting Group

Title: Connector-Sheet.SchDoc	
File: 24V-7A-Power-Board-v1.0.PrjPcb	
Date: 10/25/2024	Page Num: 4
Drawn By: Huzaifa Ali	Page Total: 4