REAL-TIME POWER MONITORING SYSTEM

MSM-8 AND MSM-12

Ein Technology Labs Sdn Bhd
Reg No: 202401003642 (1549492-V)

THREE PHASE MULTI-CHANNEL REAL-TIME METER

Built on an advanced and highly precise measurement engine with smart grid solutions, high data storage, data processing, and enhanced communications capabilities.



KEY FEATURES

- Large LCD Screen
- Interactive Touchscreen
- Anti-Tamper & Secure Access
- 4G LTE Standard
- Precise Measurement
- Over the Air Updates

INTRODUCTION

This multifunction power meter and real-time monitoring system features cellular data connectivity, a user-friendly full-colour touch screen LCD interface and is data-transfer ready to the server and platform of your choice via SFTP and/or MQTT protocols. It's primary function is for the onsite and remote real-time measurement of the following parameters of up to 12 Channels and 36 Current Inputs with Quick Access to:

- voltage, current, active power, reactive power, apparent power, power factor, bi-directional energy

REAL-TIME POWER MONITORING SYSTEM: MSM-8 / MSM-12

PRODUCT DESCRIPTION

2

Measurement Specification		
Voltage	Accuracy	
	Phase Voltage	2% of rdg
	Line Voltage	2% of rdg
Current	Phase Current	2% of rdg
Power	Phase Active Power	± 2%
	Phase Reactive Power	± 2%
	Phase Apparent Power	± 2%
Energy	Phase Import Active Energy	± 2%
	Phase Export Active Energy	± 2%
	Total Net Active Energy	± 2%
Specification		


Type	Panel Mounted
Dimensions	153mm(W) * 120mm(H) * 95.5mm(D)
Weight	0.5kg
Power supply	AC90V ~ 260V
Wiring connection types	3 phases 3-wire / 3 phases 4-wire
GSM Communication	SMT Built-in, WCDMA, LTE FDD: B1/B3/B5/B7/B8/B20 LTE TDD: B38/B40/B41 WCDMA: B1/B5/B8 GSM: B3/B8
Network Protocol	SFTP, MQTT, NTP
Current and Voltage Measurement type	TRMS
Temperature	5°C to 85°C
Humidity	5% to 95% (Non-condensing)
ESD	±8kV(Air), ±4kV(Contact)
LCD Display	Touch LCD 5",Back-Light ,Touch
SIM	Mini-PCIe 1 Slots

RATED INPUT

Voltage	Line 40 ~ 500 V	Power factor	± 0.200 ~ 1.000
Current	0.05 ~ 5A	Frequency	45 ~ 65 Hz

CONNECTION DIAGRAM & PRODUCT DIMENSION

6

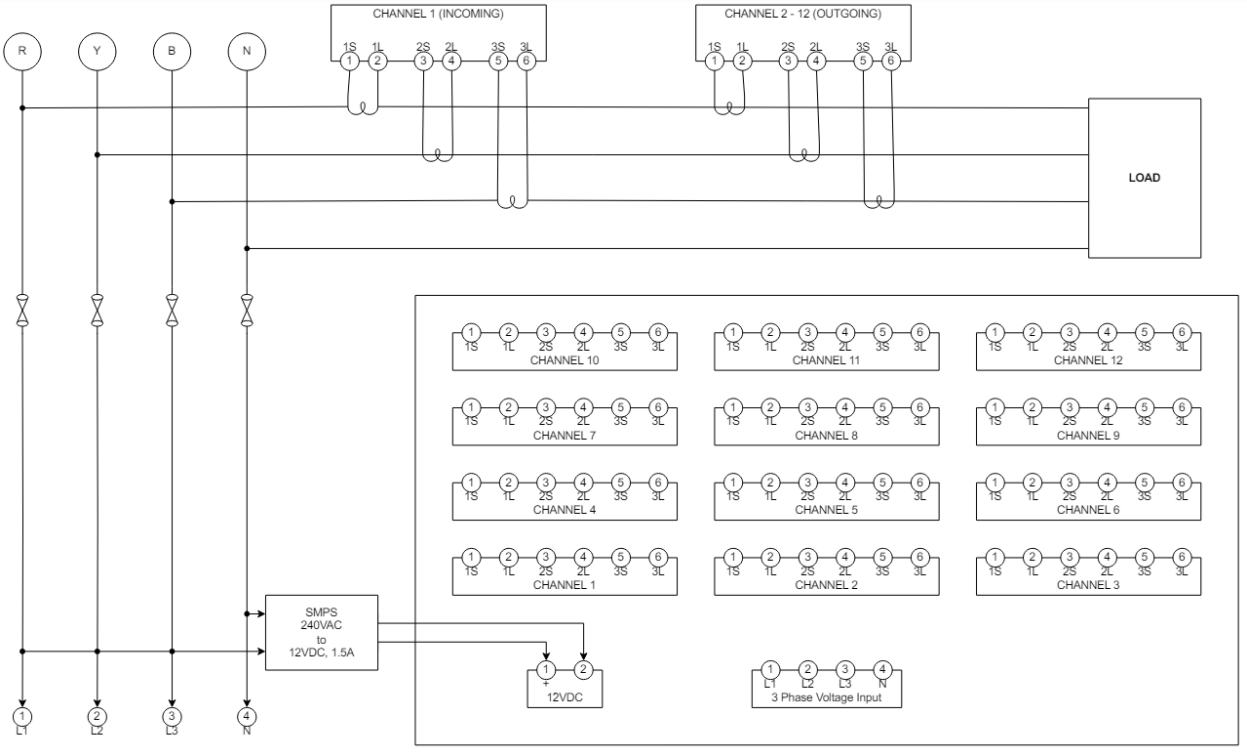

Product(mm) 154.44mm(W) * 136.94mm(H) * 167.91mm(D)

Panel Cutout(mm) 156mm(W) * 138.94mm(H)

