


ADE9000 POWER PROCESSOR

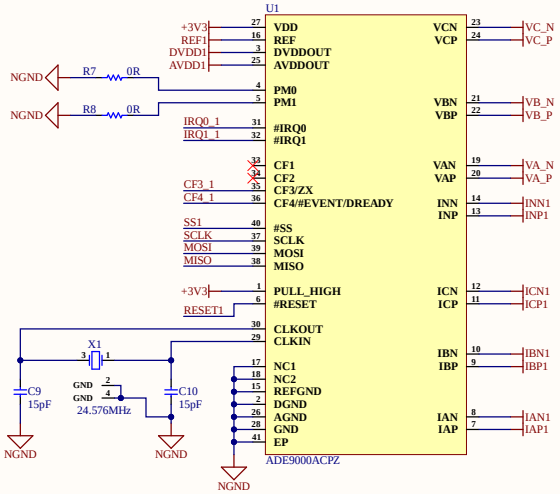


ADE9000 RESET




ADE9000 POWER DECOUPLING

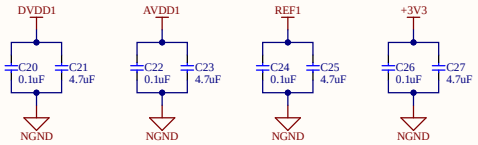


ADE9000 SYSTEM INDICATORS

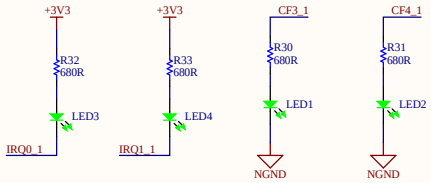


PHASE A CURRENT INPUT

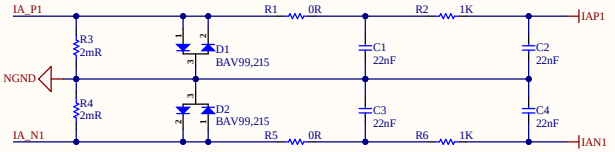


PHASE B CURRENT INPUT

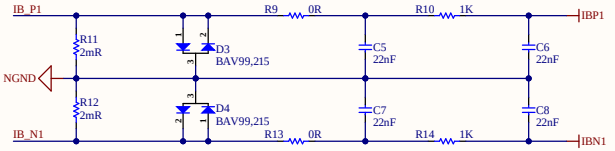

PHASE C CURRENT INPUT

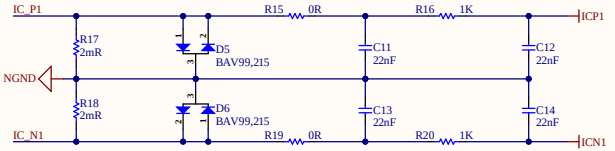


NEUTRAL CURRENT INPUT (Not Used)

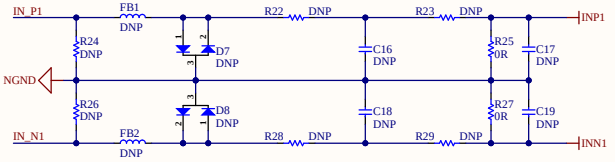


Reflect Ein Technology Labs Sdn Bhd

Title: Power-Processor-1-Sheet.SchDoc	
File: OFP_CIM_v1.5.PrjPcb	
Date: 3/5/2025	Page Num: 1
Drawn By: Nabil bin Feisal Bamadhaj	Page Total: 4


ADE9000 POWER PROCESSOR

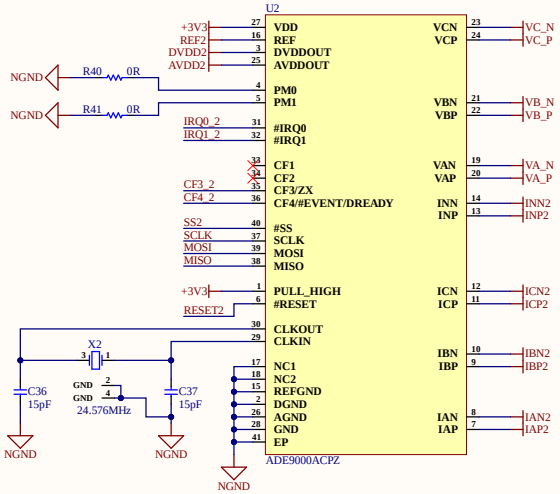


PHASE A CURRENT INPUT

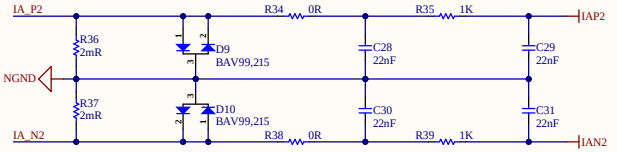


PHASE B CURRENT INPUT

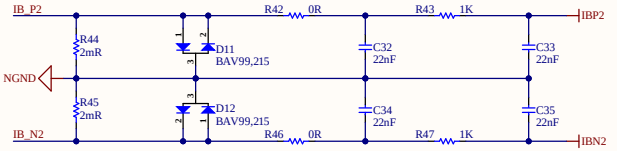


PHASE C CURRENT INPUT

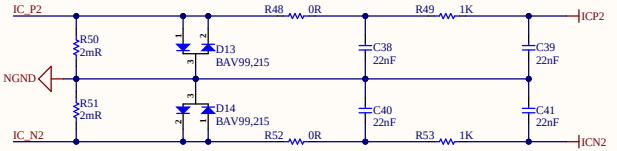


NEUTRAL CURRENT INPUT (Not Used)

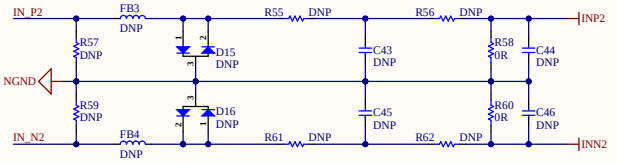


ADE9000 RESET



ADE9000 POWER DECOUPLING

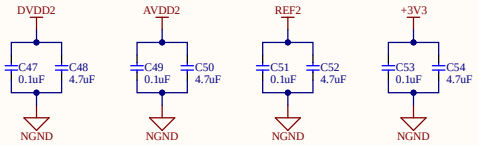


ADE9000 SYSTEM INDICATORS

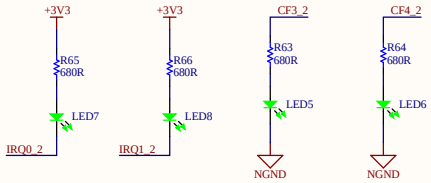


Reflect Ein Technology Labs Sdn Bhd

Title: Power-Processor-2-Sheet.SchDoc	
File: OFP_CIM_v1.5.PrjPcb	
Date: 3/5/2025	Page Num: 2
Drawn By: Nabil bin Feisal Bamadhaj	Page Total: 4


ADE9000 POWER PROCESSOR

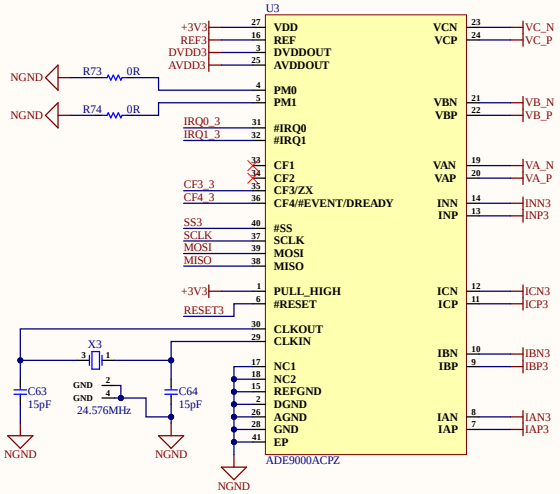


PHASE A CURRENT INPUT

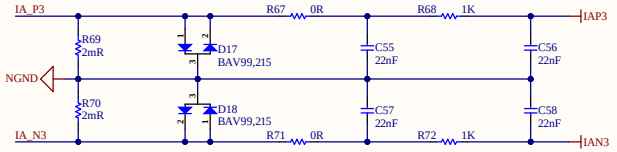


PHASE B CURRENT INPUT

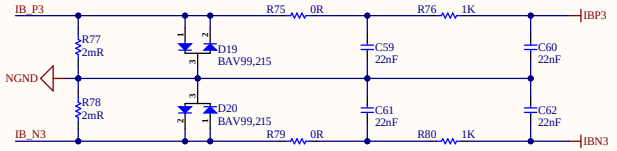


PHASE C CURRENT INPUT

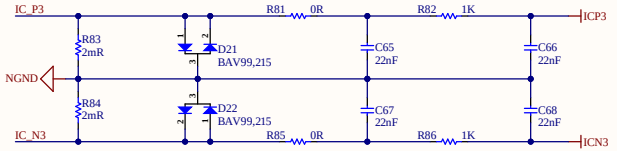


NEUTRAL CURRENT INPUT (Not Used)

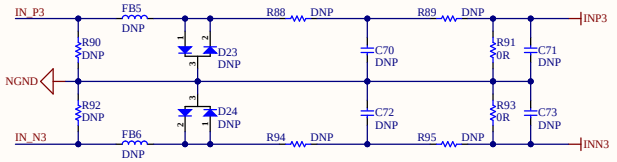


ADE9000 RESET



ADE9000 POWER DECOUPLING

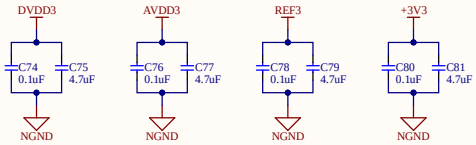


ADE9000 SYSTEM INDICATORS

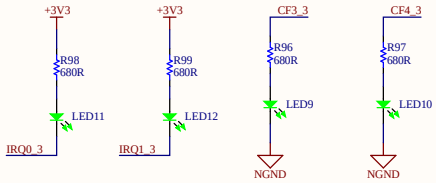


Reflect Ein Technology Labs Sdn Bhd


Title: Power-Processor-3-Sheet.SchDoc	
File: OFP_CIM_v1.5.PrjPcb	
Date: 3/5/2025	Page Num: 3
Drawn By: Nabil bin Feisal Bamadhaj	Page Total: 4


CURRENT CHANNELS TERMINAL INPUT





CURRENT CHANNELS CONNECTOR






Reflect Ein Technology Labs Sdn Bhd

Title: Connectors-Sheet.SchDoc

File: OFP_CIM_v1.5.PrjPcb

Date: 3/5/2025	Page Num: 4
Drawn By: Nabil bin Feisal Bamadhaj	Page Total: 4

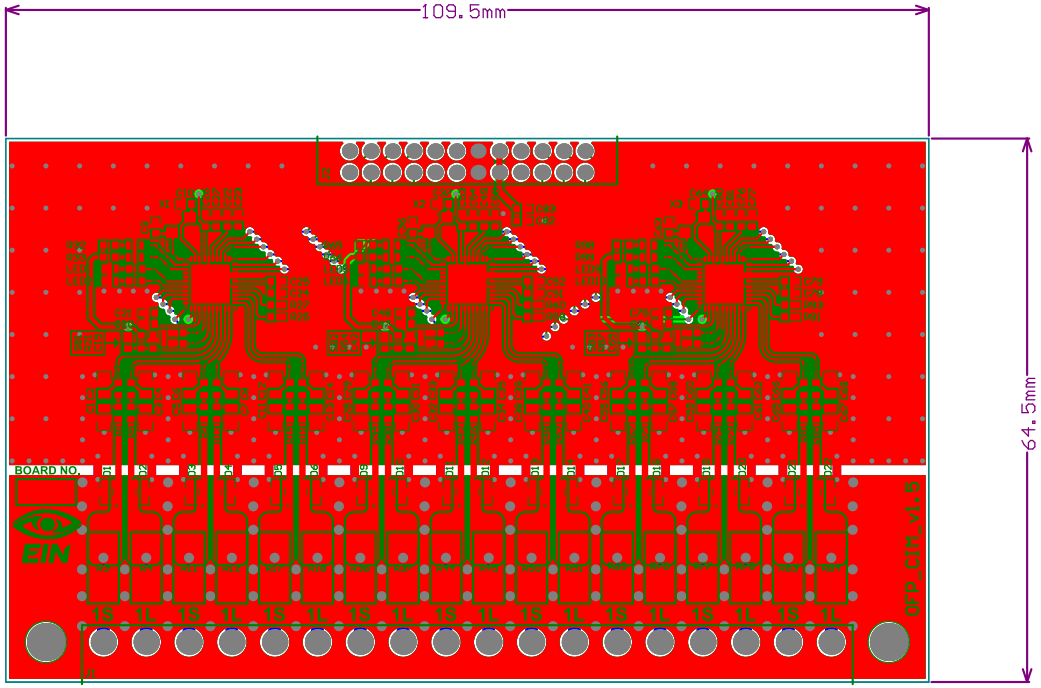

Layer	Name	Material	Thickness	Constant	Board Layer Stack
	Top Overlay				
	Top Solder	Solder Resist	0.010mm	3.5	
1	Top Layer		0.035mm		
	Dielectric 2	PP-006	0.203mm	4.1	
2	Layer 1	CF-004	0.035mm		
	Dielectric 1	FR-4	1.030mm	4.8	
3	Layer 2	CF-004	0.035mm		
	Dielectric 3	PP-006	0.203mm	4.1	
4	Bottom Layer		0.035mm		
	Bottom Solder	Solder Resist	0.010mm	3.5	
	Bottom Overlay				
Total board thickness:			1.596mm		