





U_Power_Section
Power_Section.SchDoc
IO_4
IO_4
U_Battery Charging_Section
Battery Charging_Section.SchDoc
B_ADC
CHG
B_ADC
CHG
U_Audio_Section
Audio_Section.SchDoc
#12-P
#13-P
#14-P
#15-P
#12-P
#13-P
#14-P
#15-P
#O_MIC
#O_MIC
U_Controller_Section
Controller_Section.SchDoc
#12-P
#13-P
#14-P
#15-P
RX
TX
RTS
DTR
IO_4
#12-P
#13-P
#14-P
#15-P
RX
TX
RTS
DTR
IO_4
B_ADC
CHG
#O_MIC
SOFT_P
SDA_
SCL_
B_ADC
CHG
#O_MIC
SOFT_P
SDA_
SCL_
U_Sensor_Section
Sensor_Section.SchDoc
SDA_
SCL_
SDA_
SCL_
U_Connector_Section
Connector_Section.SchDoc
RX
TX
RTS
DTR
RX
TX
RTS
DTR
AC2
AC1
AC2
AC1
U_SMPS_Section
SMPS_Section.SchDoc
AC1
AC2
AC1
AC2

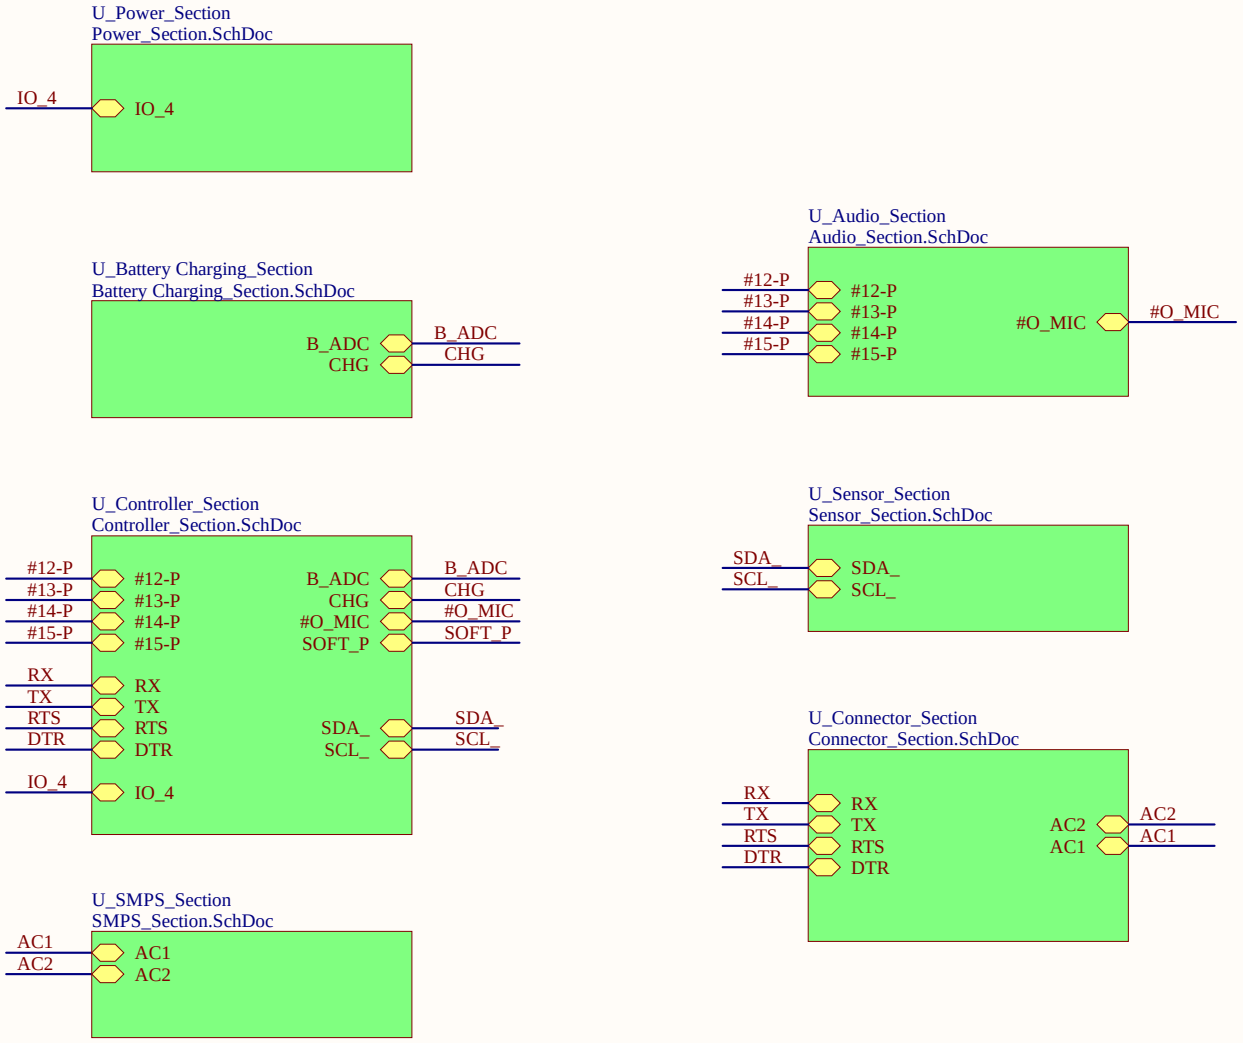



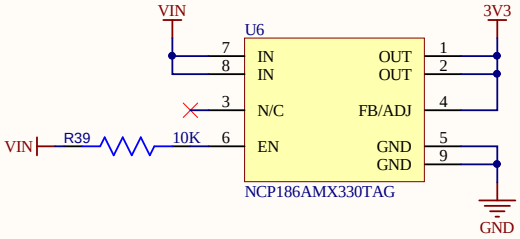


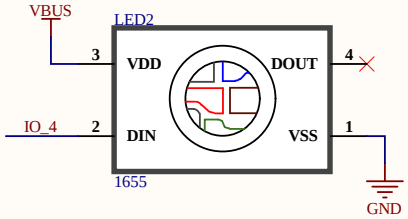


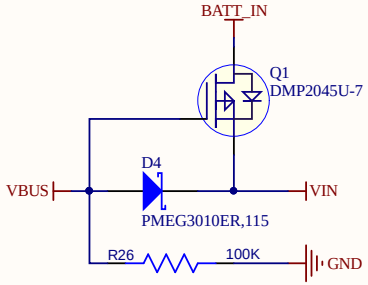

Power Section



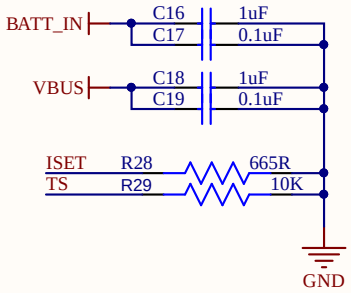

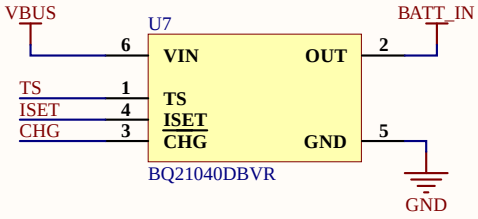


Place Decoupling Capacitor with there respective pins.

ISET Resistor Value is changed in Parameters, please be careful.


As per Datasheet, the value should not exceed 675 Ohm.









Battery Charging Section

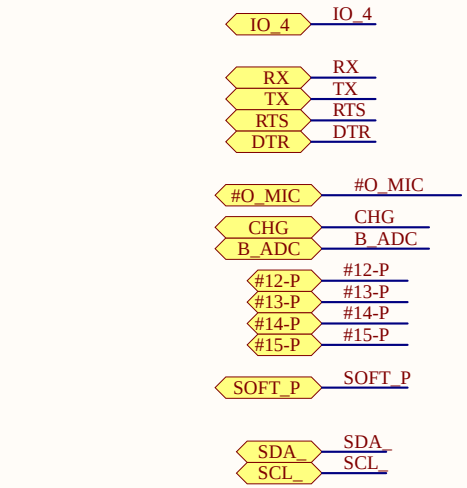



External Enable wouldn't be used as Development board already had circuit.


SW2 is being used for Software Reset.

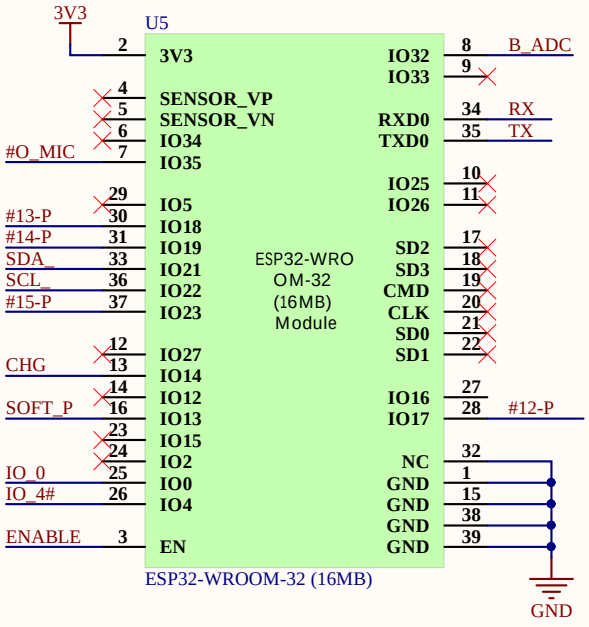

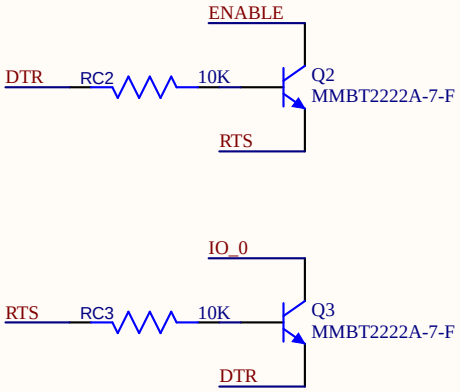




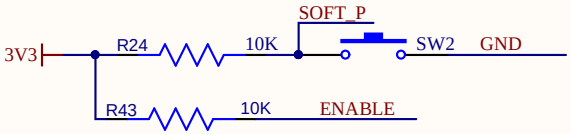

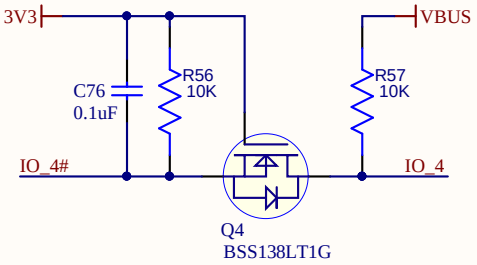



Controller Section

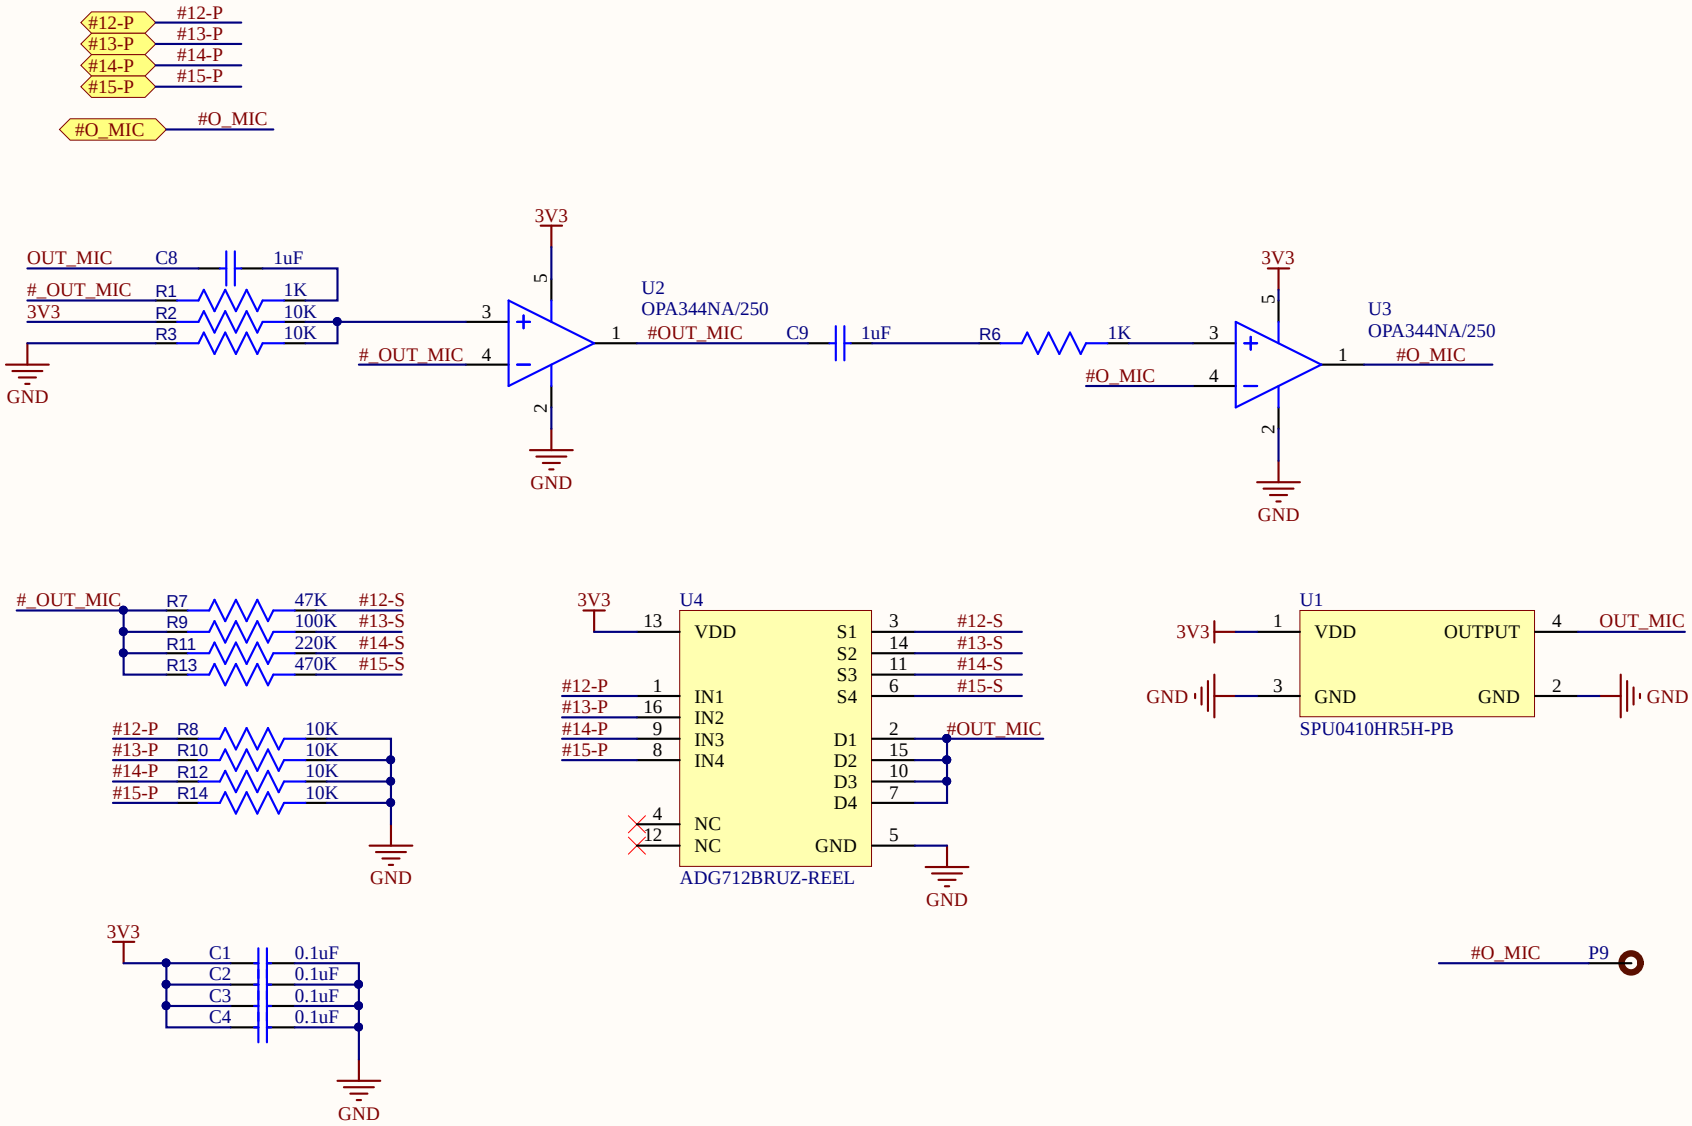


Audio Section





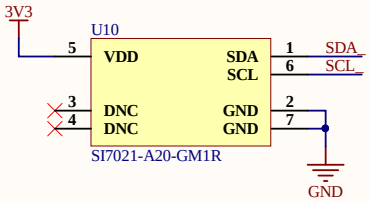



Sensor Section





Mentioned Capacitors will be placed with Battery Connector and with USB Main Connector.


No Need to place Decoupling Capacitors with Switch as this is just path.









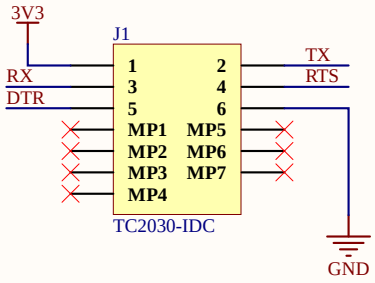



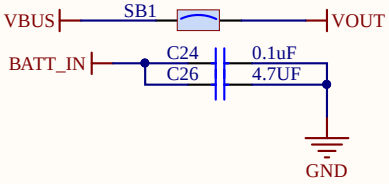

Connector Section

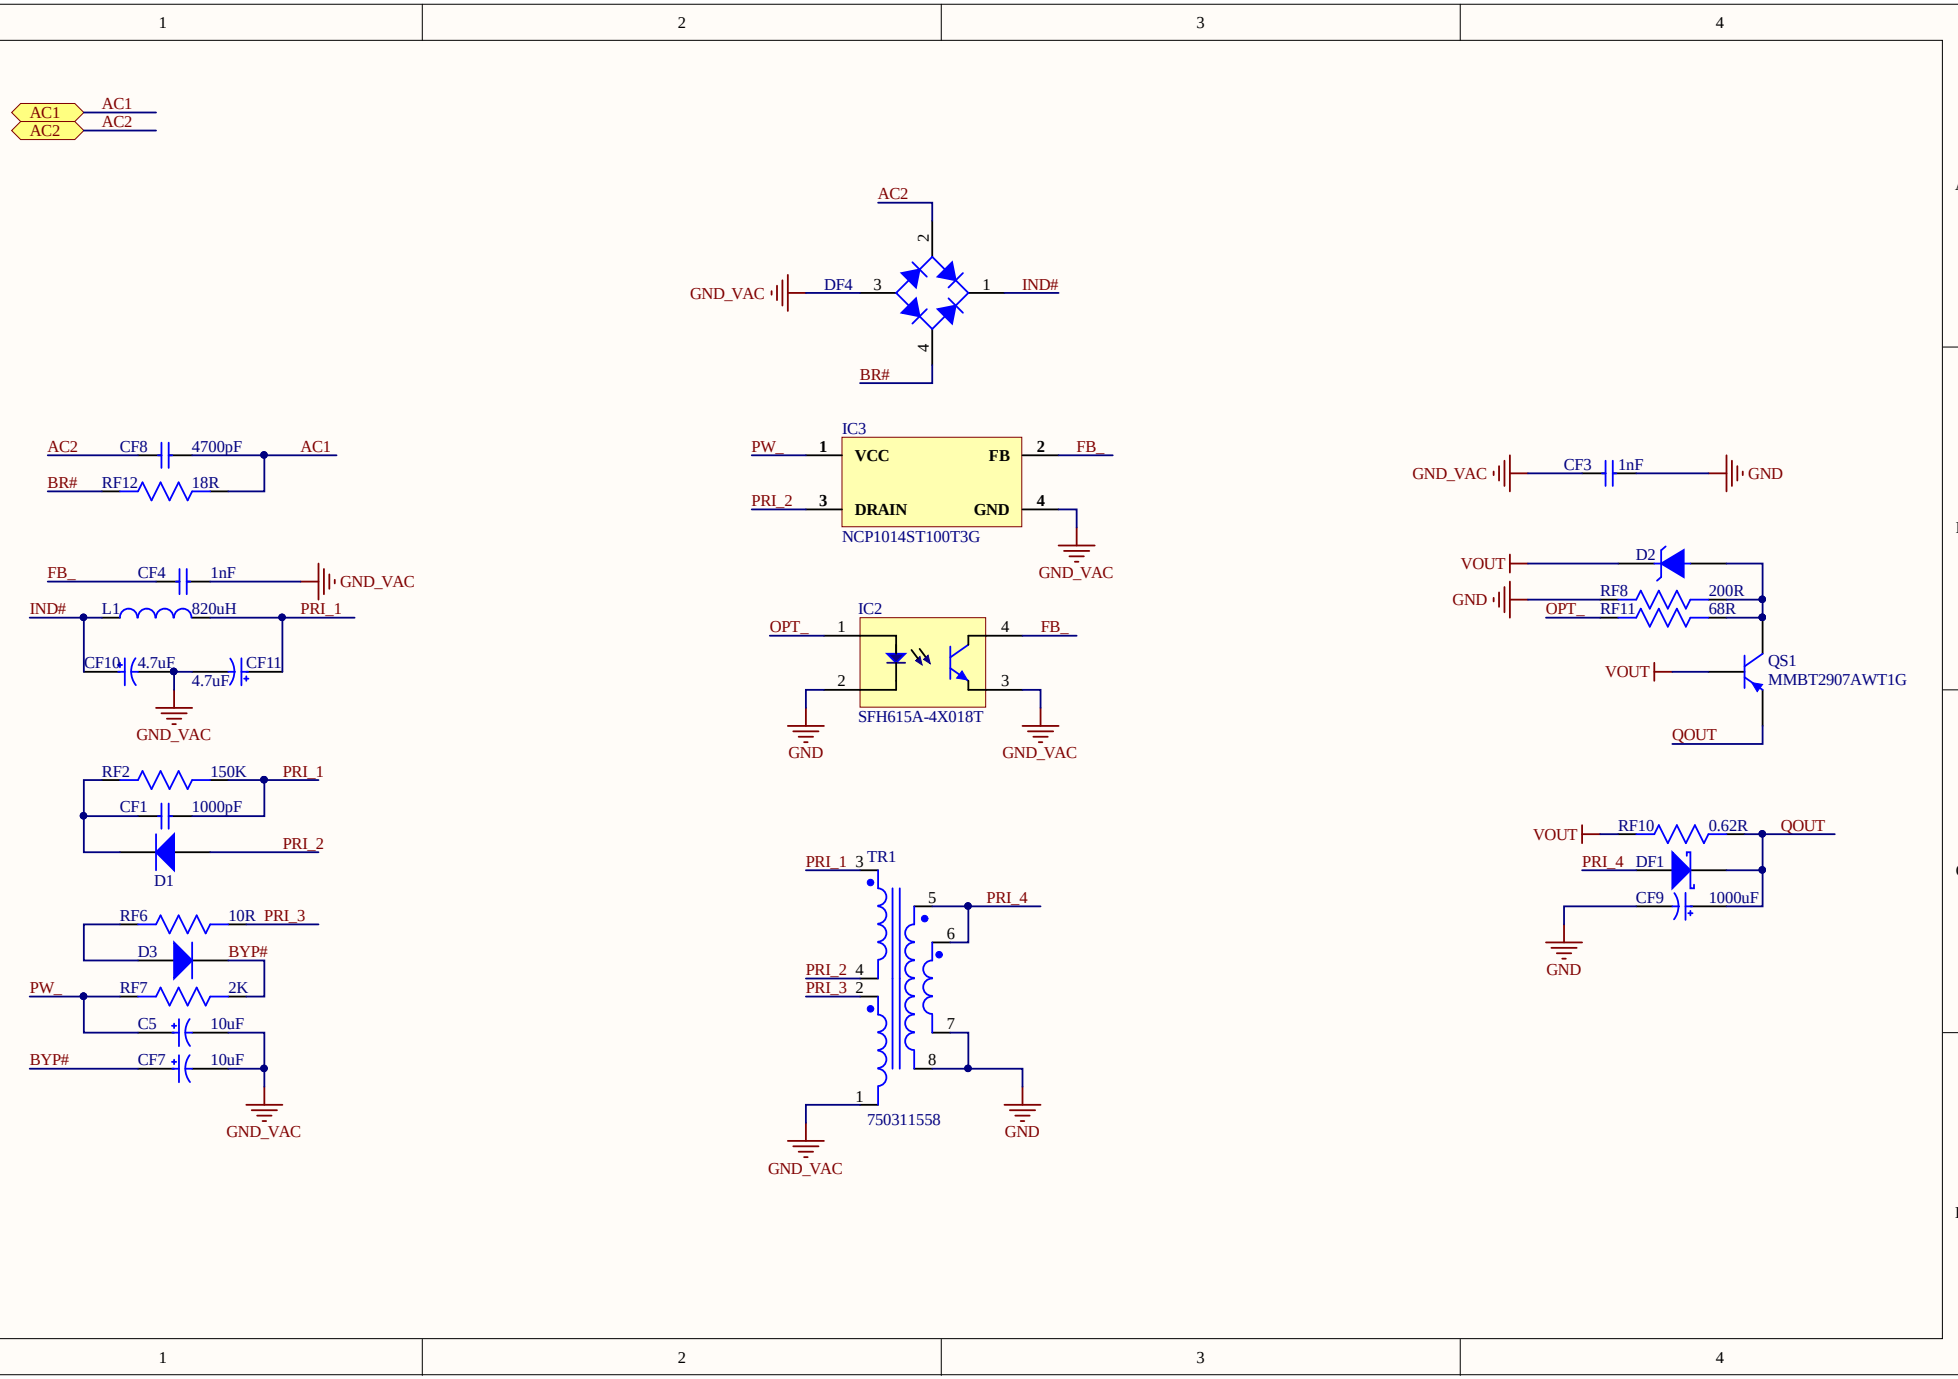
AC1
AC2
AC1
AC2
AC2
2
GND_VAC
DF4
3
1
IND#
4
BR#
AC2
CF8
4700pF
AC1
BR#
RF12
18R
IC3
PW_
1
VCC
FB
2
FB_
PRI_2
3
DRAIN
GND
4
NCP1014ST100T3G
GND_VAC
GND_VAC
CF3
1nF
GND
FB_
CF4
1nF
GND_VAC
IND#
L1
820uH
PRI_1
CF10
4.7uF
4.7uF
CF11
GND_VAC
OPT_
1
IC2
4
FB_
2
3
SFH615A-4X018T
GND
GND_VAC
VOUT
D2
GND
RF8
200R
OPT_
RF11
68R
VOUT
QS1
MMBT2907AWT1G
QOUT
RF2
150K
PRI_1
CF1
1000pF
PRI_2
D1
VOUT
RF10
0.62R
QOUT
PRI_4
DF1
CF9
1000uF
GND
RF6
10R
PRI_3
D3
BYP#
PW_
RF7
2K
C5
10uF
BYP#
CF7
10uF
GND_VAC
PRI_1
3
TR1
5
PRI_4
6
PRI_2
4
PRI_3
2
7
8
1
750311558
GND
GND_VAC