





U_Power_Section
Power_Section.SchDoc
IO_4
IO_4
U_Battery Charging_Section
Battery Charging_Section.SchDoc
B_ADC
CHG
B_ADC
CHG
U_Audio_Section
Audio_Section.SchDoc
#12-P
#13-P
#14-P
#15-P
#12-P
#13-P
#14-P
#15-P
#O_MIC
#O_MIC
U_Controller_Section
Controller_Section.SchDoc
#12-P
#13-P
#14-P
#15-P
RX
TX
RTS
DTR
IO_4
#12-P
#13-P
#14-P
#15-P
RX
TX
RTS
DTR
IO_4
B_ADC
CHG
#O_MIC
SOFT_P
SDA_
SCL_
B_ADC
CHG
#O_MIC
SOFT_P
SDA_
SCL_
U_Sensor_Section
Sensor_Section.SchDoc
SDA_
SCL_
SDA_
SCL_
U_Connector_Section
Connector_Section.SchDoc
RX
TX
RTS
DTR
RX
TX
RTS
DTR
AC2
AC1
AC2
AC1
U_SMPS_Section
SMPS_Section.SchDoc
AC1
AC2
AC1
AC2

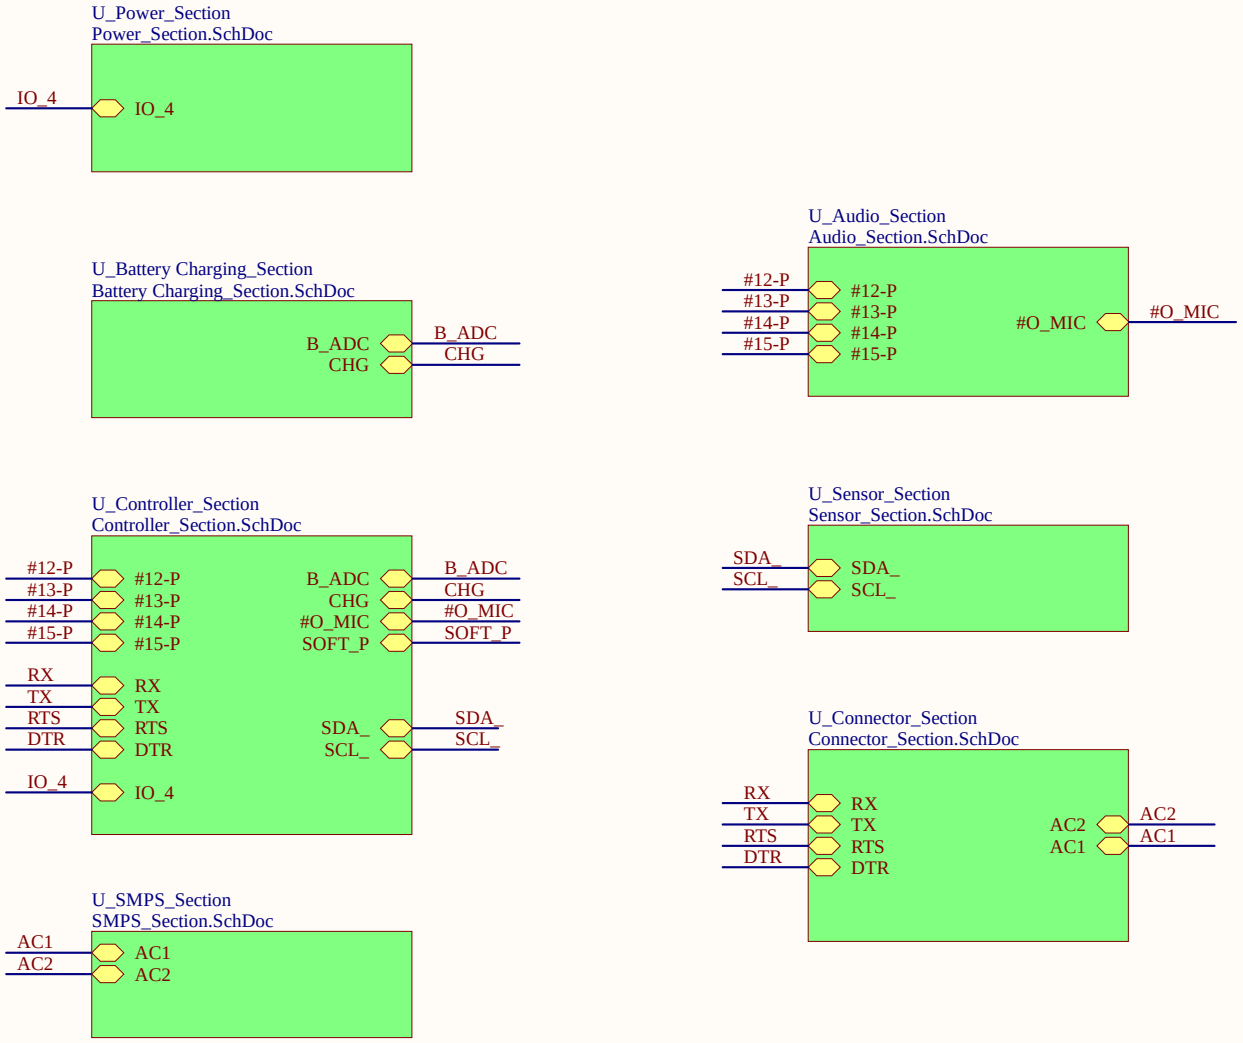



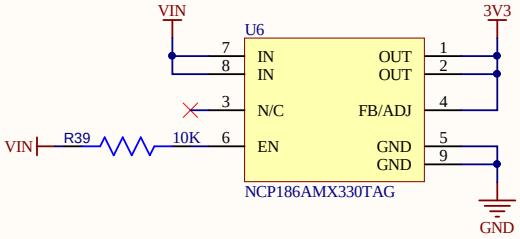


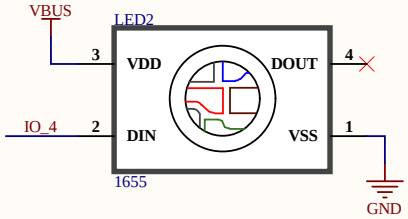


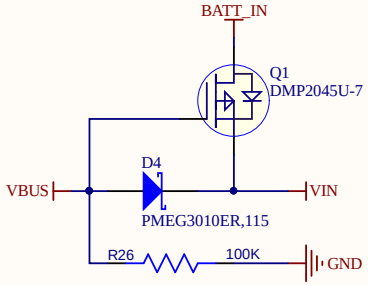

Power Section



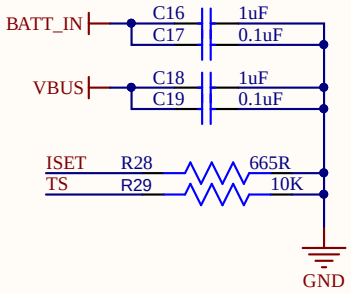

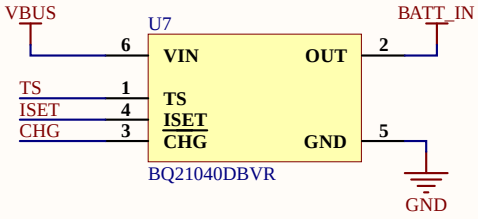


Place Decoupling Capacitor with there respective pins.

ISET Resistor Value is changed in Parameters, please be careful.


As per Datasheet, the value should not exceed 675 Ohm.









Battery Charging Section

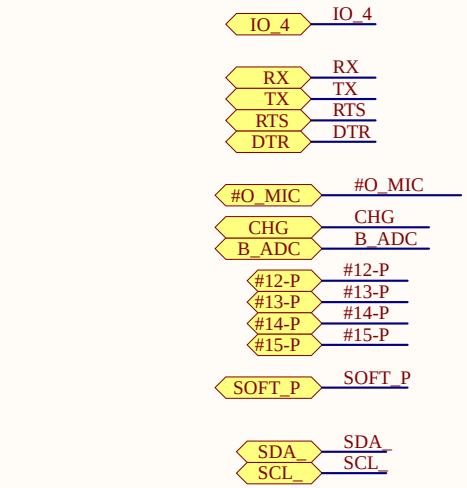



External Enable wouldn't be used as Development board already had circuit.


SW2 is being used for Software Reset.

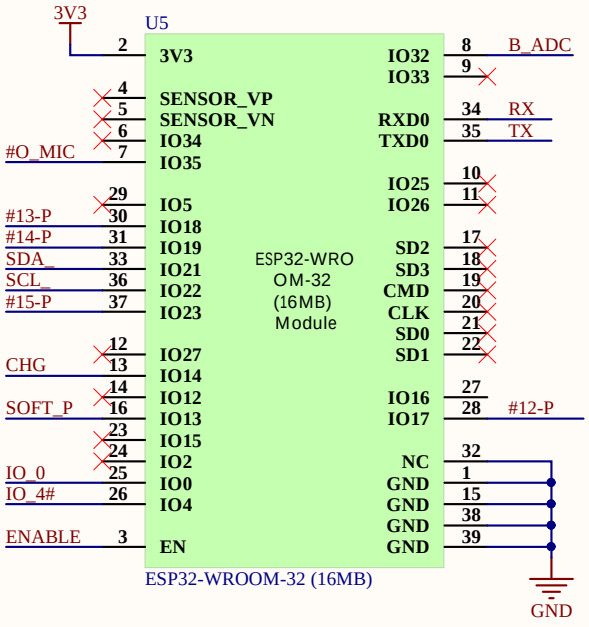

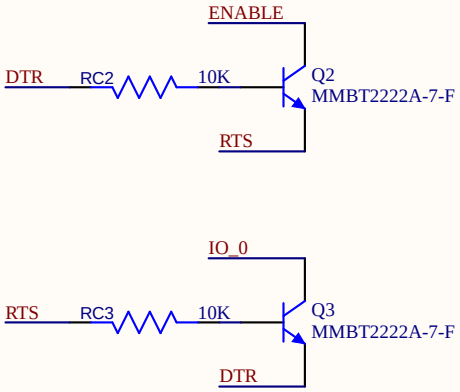




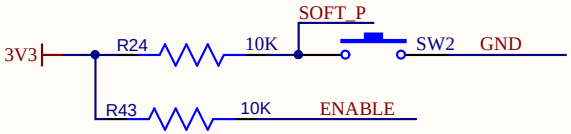

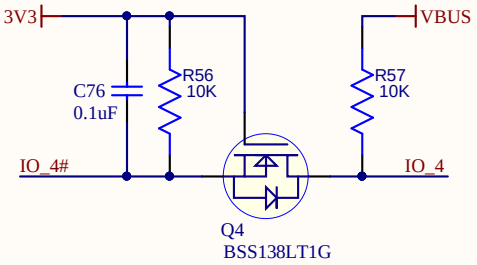



Controller Section

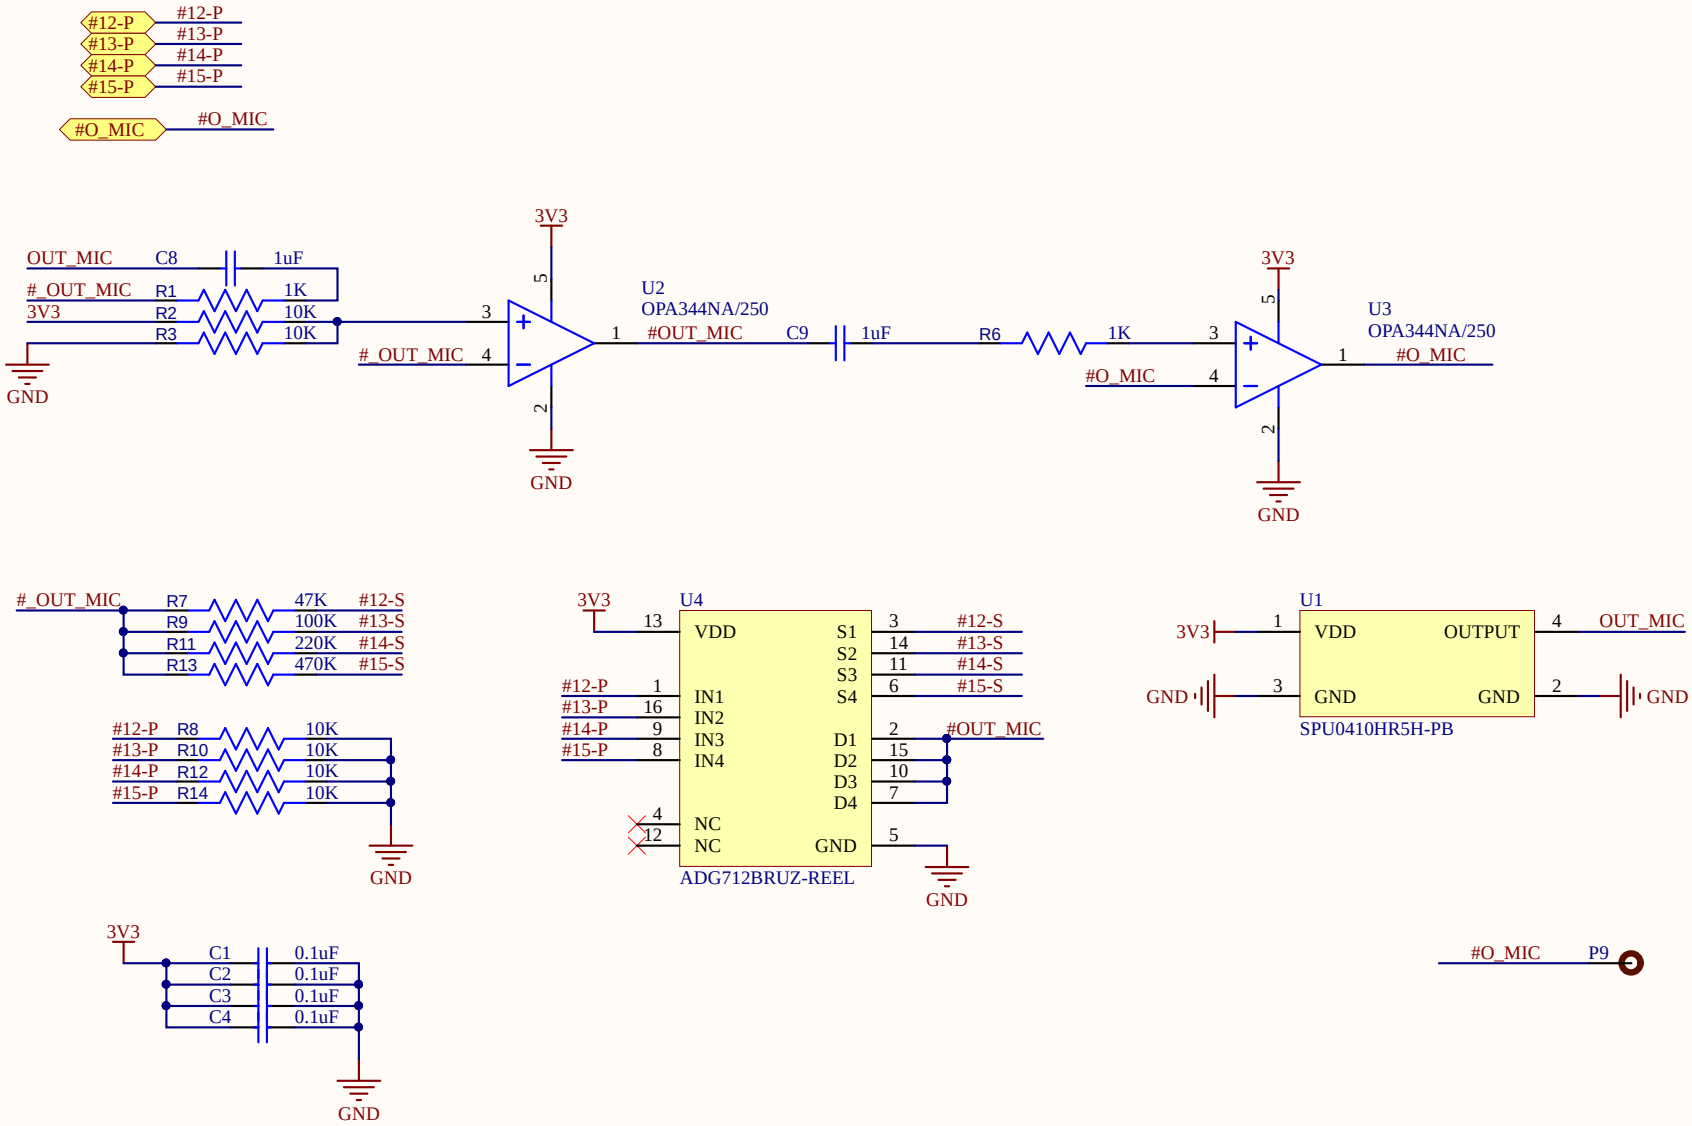


Audio Section





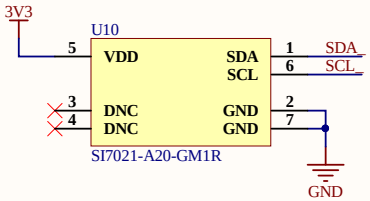



Sensor Section





Mentioned Capacitors will be placed with Battery Connector and with USB Main Connector.


No Need to place Decoupling Capacitors with Switch as this is just path.




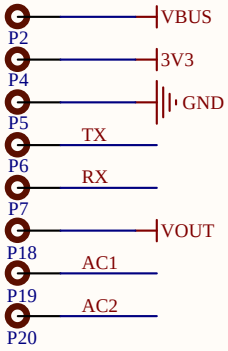




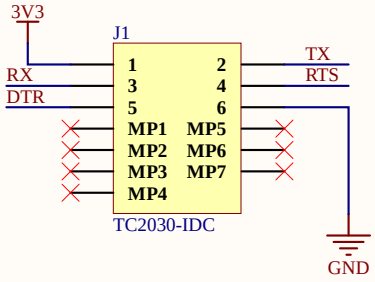



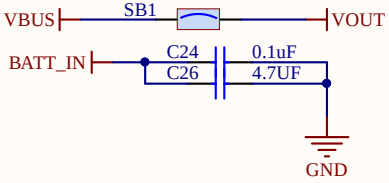

Connector Section

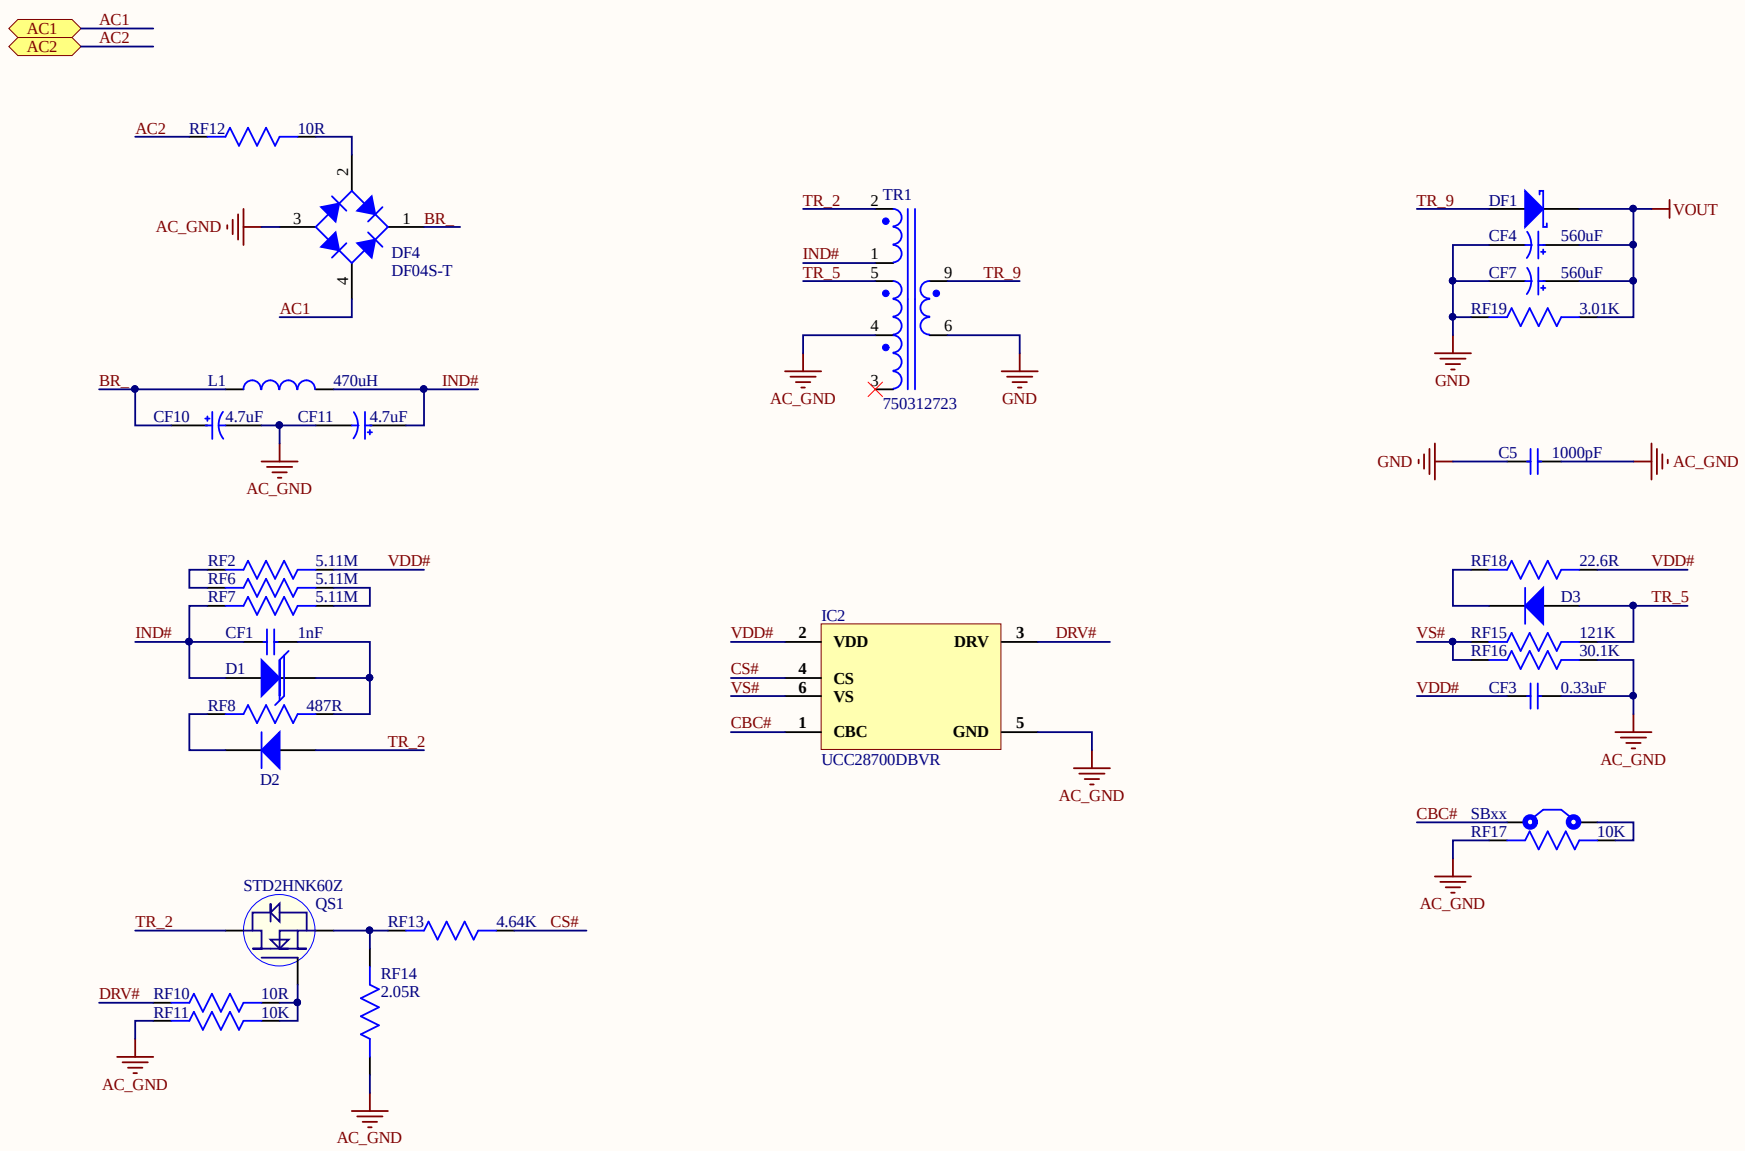
AC1
AC2
AC2
RF12
10R
2
AC_GND
3
1
BR
DF4
DF04S-T
4
AC1
BR
L1
470uH
IND#
CF10
4.7uF
CF11
4.7uF
AC_GND
TR_2
2
TR1
IND#
1
TR_5
5
9
TR_9
4
6
3
AC_GND
750312723
GND
TR_9
DF1
VOUT
CF4
560uF
CF7
560uF
RF19
3.01K
GND
GND
C5
1000pF
AC_GND
RF2
5.11M
VDD#
RF6
5.11M
RF7
5.11M
IND#
CF1
1nF
D1
RF8
487R
TR_2
D2
IC2
VDD#
2
VDD
DRV
3
DRV#
CS#
4
CS
VS#
6
VS
CBC#
1
CBC
GND
5
UCC28700DBVR
AC_GND
RF18
22.6R
VDD#
D3
TR_5
VS#
RF15
121K
RF16
30.1K
VDD#
CF3
0.33uF
AC_GND
CBC#
SBxx
RF17
10K
AC_GND
STD2HNK60Z
QS1
TR_2
RF13
4.64K
CS#
RF14
2.05R
DRV#
RF10
10R
RF11
10K
AC_GND
AC_GND