
Layer	Name	Material	Thickness	Constant	Board Layer Stack
	Top Overlay				
	Top Solder	Solder Resist	3.00mil	3.5	
1	Top Layer		10.00mil		
	Dielectric 1	FR-4	37.00mil	4.8	
2	Bottom Layer		10.00mil		
	Bottom Solder	Solder Resist	3.00mil	3.5	
	Bottom Overlay				

Fabrication Note:

J1 is used for FS1000A TX Module placement. If same type is used then it should be mounted with an offset of atleast 10mm from Surface of PCB as height of Module is 8mm.

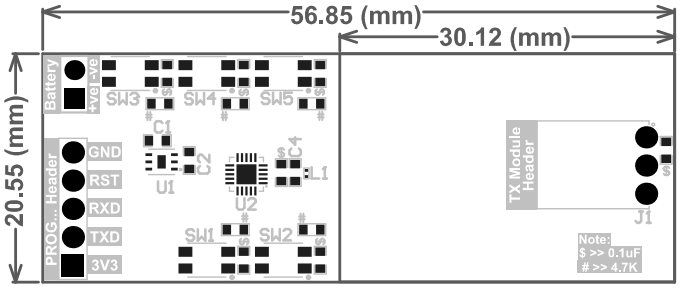


Note:

30.12 mm is the Area reserved for FS10000A Transmitter Module which needs to be mounted within PCB area.

Layer	Name	Material	Thickness	Constant	Board Layer Stack
	Top Overlay				
	Top Solder	Solder Resist	3.00mil	3.5	
1	Top Layer		10.00mil		
	Dielectric 1	FR-4	37.00mil	4.8	
2	Bottom Layer		10.00mil		
	Bottom Solder	Solder Resist	3.00mil	3.5	
	Bottom Overlay				

Fabrication Note:

J1 is used for FS1000A TX Module placement. If same type is used then it should be mounted with an offset of atleast 10mm from Surface of PCB as height of Module is 8mm.

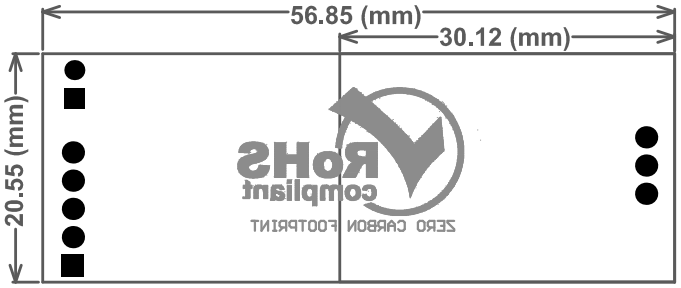

Note:

30.12 mm is the Area reserved for FS10000A Transmitter Module which needs to be mounted within PCB area.