
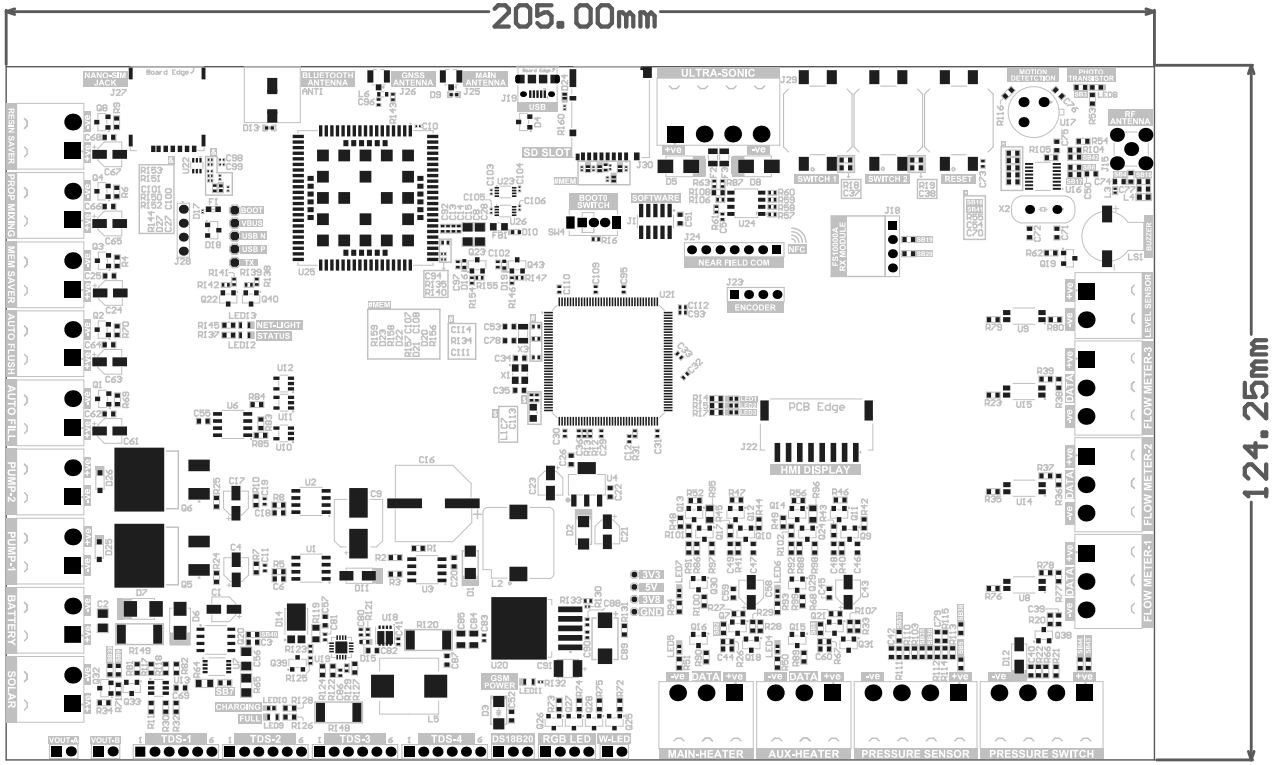


Layer	Name	Material	Thickness	Constant	Board Layer Stack
	Top Overlay				
	Top Solder	Solder Resist	0.71mil	3.5	
1	Top Layer		1.38mil		
	Dielectric 2	PP-006	7.99mil	4.4	
2	GND	CF-004	1.18mil		
	Dielectric 1	FR-4	40.55mil	4.6	
3	PWR	CF-004	1.18mil		
	Dielectric 3	PP-006	7.99mil	4.4	
4	Bottom Layer		1.38mil		
	Bottom Solder	Solder Resist	0.71mil	3.5	
	Bottom Overlay				
Total board thickness:			63.07mil		

Note:
J18 is the header placed for FS10000A Receiver Module and it should be mounted on board with an offset of atleast 3mm from the surface of PCB.

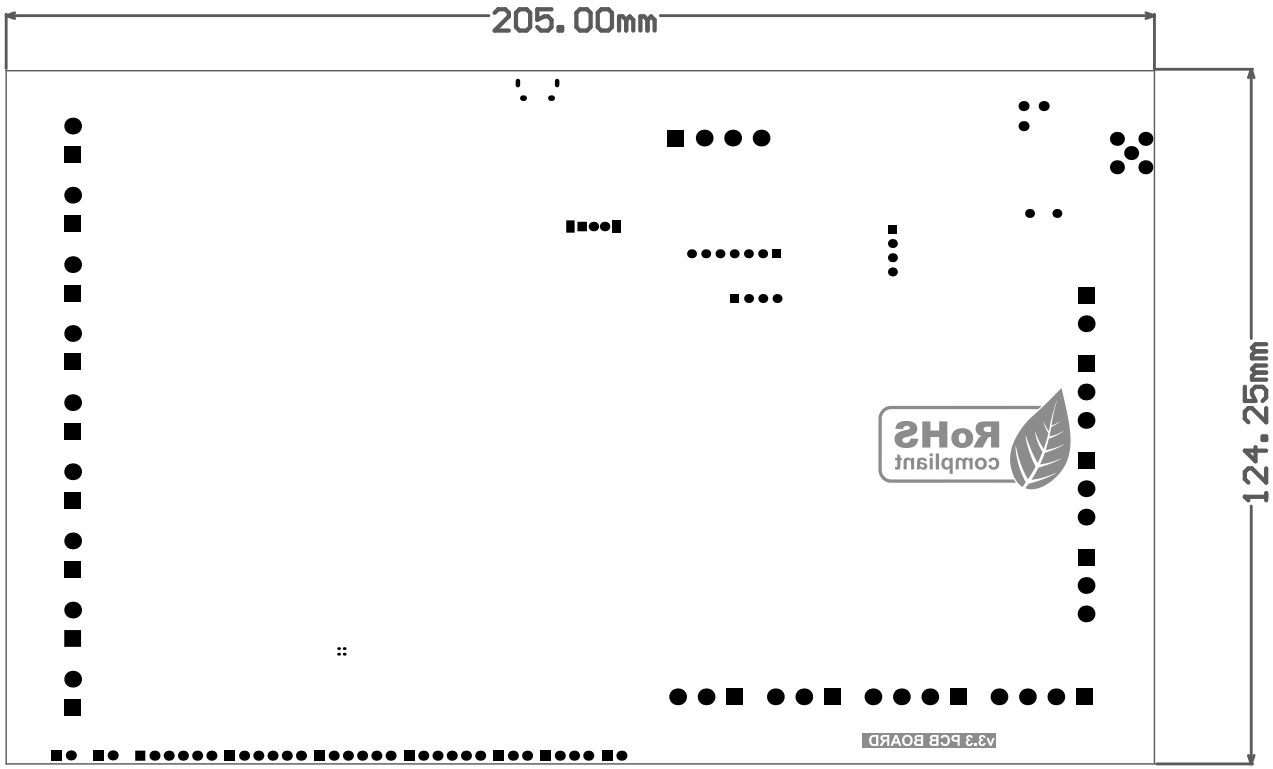

Layer	Name	Material	Thickness	Constant	Board Layer Stack
	Top Overlay				
	Top Solder	Solder Resist	0.71mil	3.5	
1	Top Layer		1.38mil		
	Dielectric 2	PP-006	7.99mil	4.4	
2	GND	CF-004	1.18mil		
	Dielectric 1	FR-4	40.55mil	4.6	
3	PWR	CF-004	1.18mil		
	Dielectric 3	PP-006	7.99mil	4.4	
4	Bottom Layer		1.38mil		
	Bottom Solder	Solder Resist	0.71mil	3.5	
	Bottom Overlay				
Total board thickness:			63.07mil		

Note:
J18 is the header placed for FS10000A Receiver Module and it should be mounted on board with an offset of atleast 3mm from the surface of PCB.