
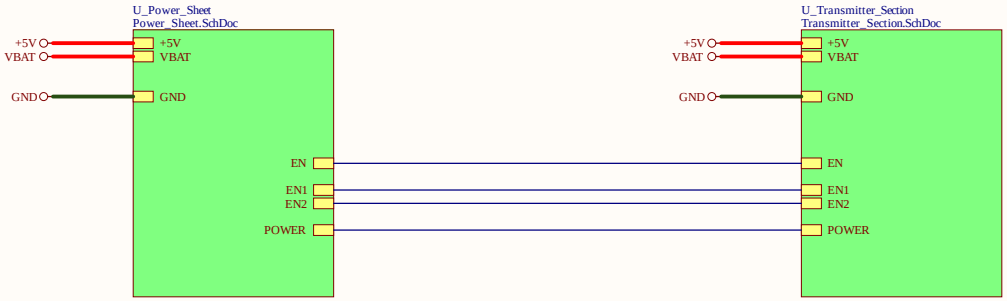



eSpark Consulting Group

Title: Top_Sheet.SchDoc		
File: Fob_Transmitter.PrjPcb		
Date: 22/08/2024	Page	Num: 1
Drawn By: Huzaifa Ali	Page	Total: 3


TP4054-200mA

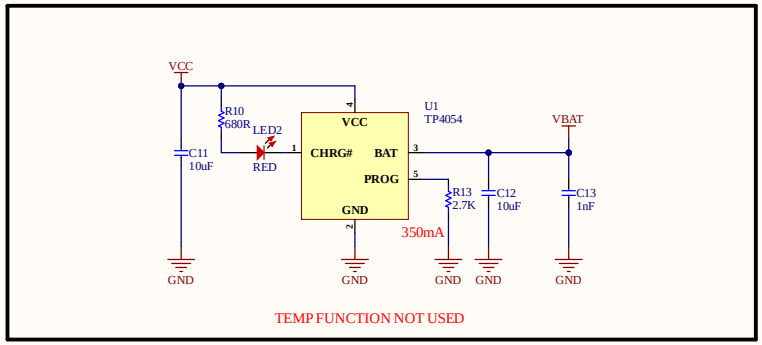


BOOST

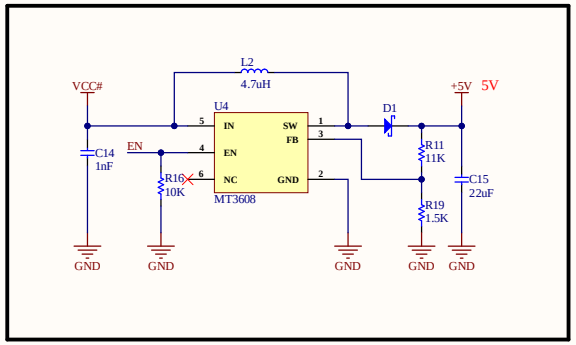


POWER ORING

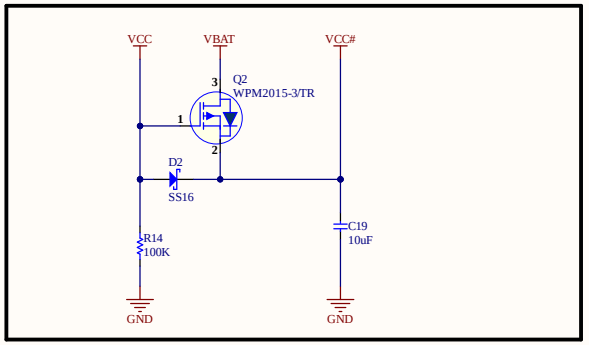

USB C

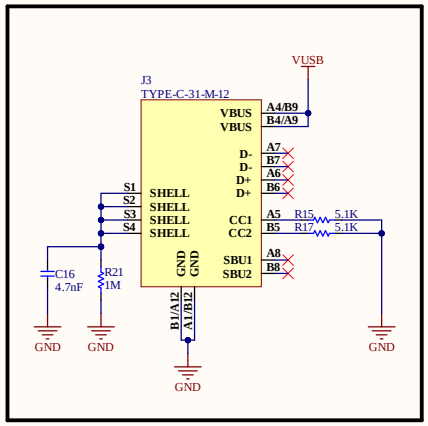

WIRELESS CHARGING

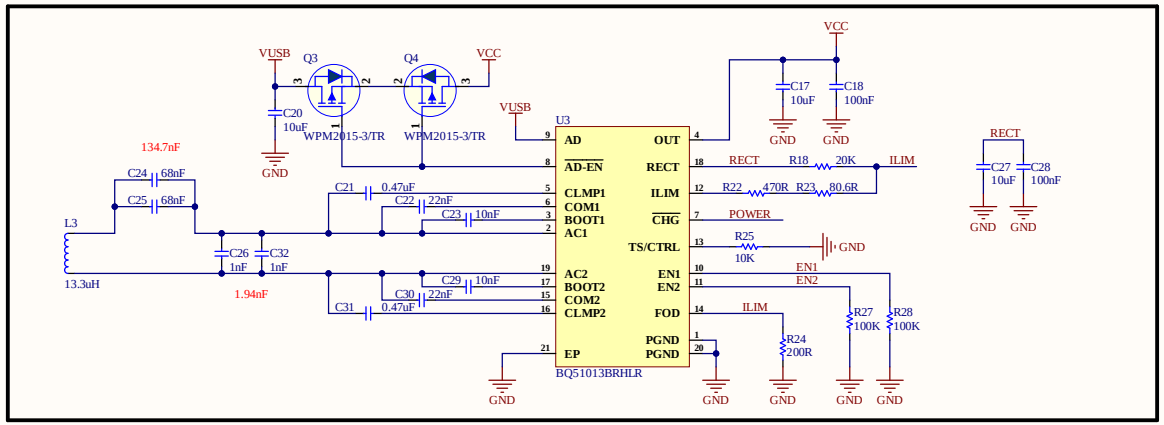

Iilim = 420mA, Rilim = 747R
ROS= 20k,
RFOD = 196R,
R1 = 551R


EN1
EN2
EN
POWER

VBAT
+5V
GND


eSpark Consulting Group

Title: Power_Sheet.SchDoc	
File: Fob_Transmitter.PrjPcb	
Date: 04/09/2024	Page Num: 2
Drawn By: Huzaifa Ali	Page Total: 3


DECOUPLING CAPS



RESET SWITCH




BATTERY INPUT




BATTERY LINK


PROGRAMMING HEADER



INDICATION LEDS

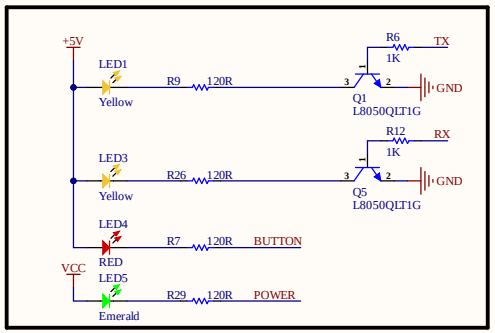


HC-12 433MHz MODULE

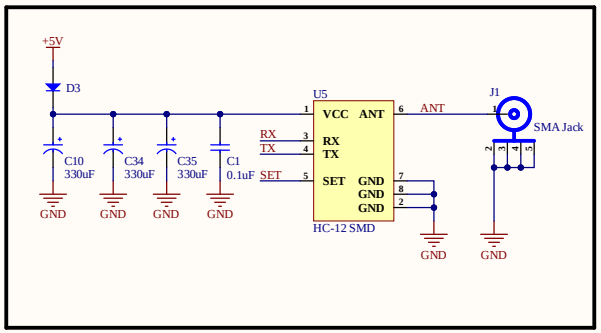



Helical Spring Antenna
HJ Tech RF2111027


MICROCONTROLLER

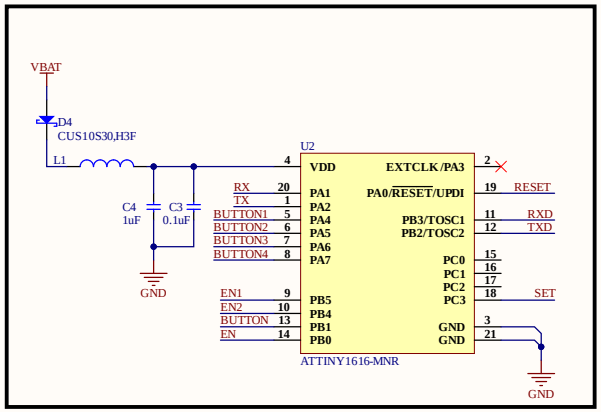

USER INPUT

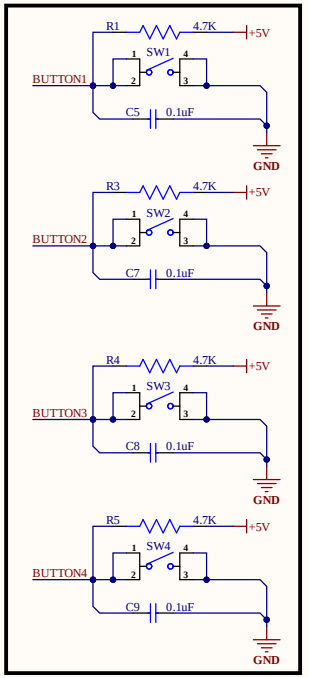





eSpark Consulting Group

Title: Transmitter_Section.SchDoc		
File: Fob_Transmitter.PrjPcb		
Date: 04/09/2024	Page	Num: 3
Drawn By: Huzaifa Ali	Page	Total: 3

Layer	Name	Material	Thickness	Constant	Board Layer Stack
	Top Overlay				
	Top Solder	Solder Resist	3.00mil	3.5	
1	Top Layer		10.00mil		
	Dielectric 1	FR-4	37.00mil	4.8	
2	Bottom Layer		10.00mil		
	Bottom Solder	Solder Resist	3.00mil	3.5	
	Bottom Overlay				
Total board thickness:			63.00mil		

