


Cannot open file D:\eSpark-Consultants\eSpark-Hardware\Altium Template\espark-consulting-group-800x300.jpg. File does not exist.

Title: Top_Sheet.SchDoc


File: Fob_Transmitter_V4.0.PrjPcb

Date: 11/19/2025	Page Num: 1
Drawn By: Huzaifa Ali	Page Total: 3


TP4054-200mA

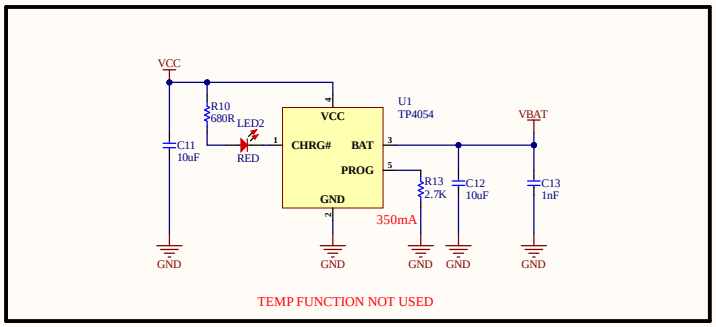


BOOST

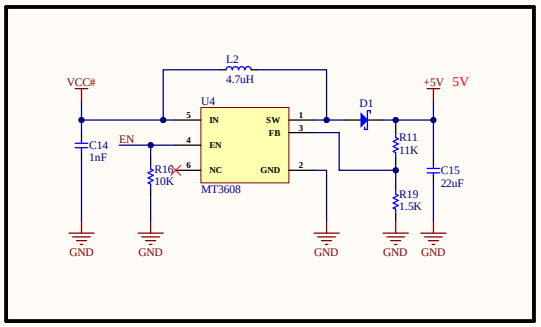


POWER ORING

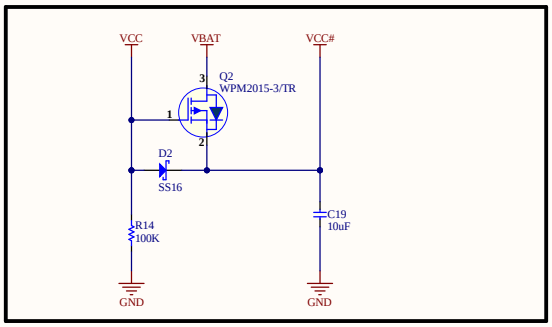

USB C

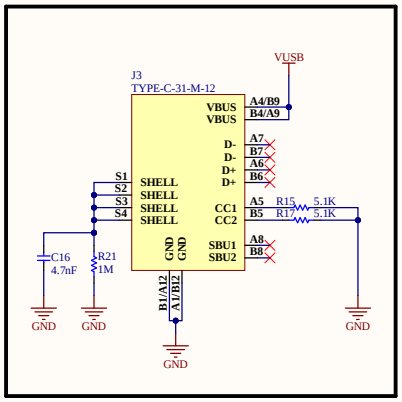


WIRELESS CHARGING

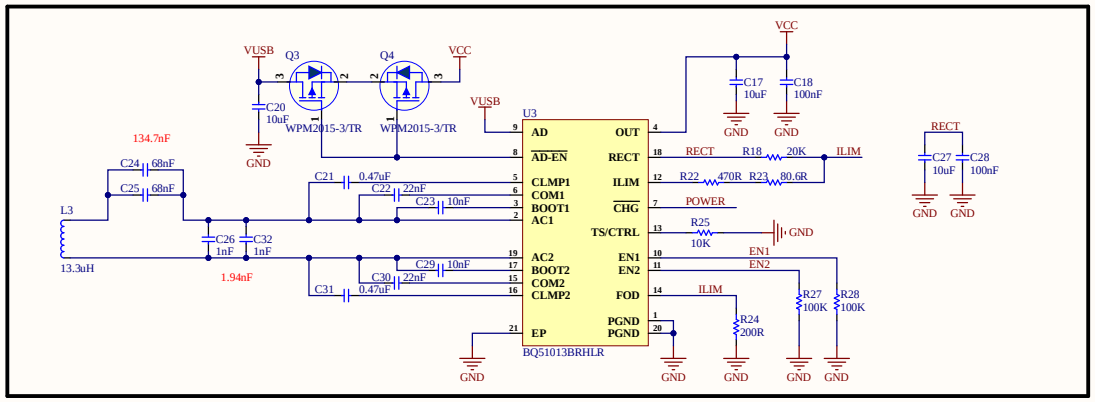

Ilim = 420mA, Rilim = 747R
ROS= 20k,
RFOD = 196R,
R1 = 551R

3V3 LDO




EN1 — EN1
EN2 — EN2
EN — EN
POWER — POWER

VBAT — VBAT
+5V — +5V
GND — GND


Cannot open file
D:\eSpark-Consultants\eSpark-Hardware\Altium Template\espark-consulting-group-800x300.jpg.
File does not exist.

Title: Power_Sheet.SchDoc	
File: Fob_Transmitter_V4.0.PrjPcb	
Date: 11/19/2025	Page Num: 2
Drawn By: Huzaifa Ali	Page Total: 3

DECOUPLING CAPS




BATTERY INPUT




BATTERY LINK


PROGRAMMING HEADER




INDICATION LEDS

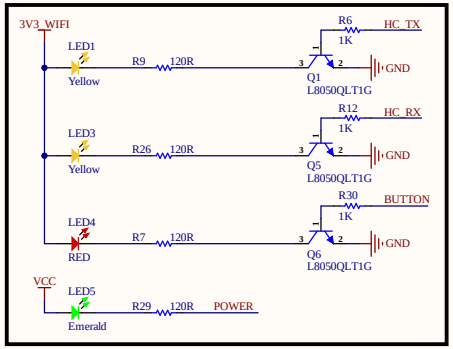

CONTROLLER

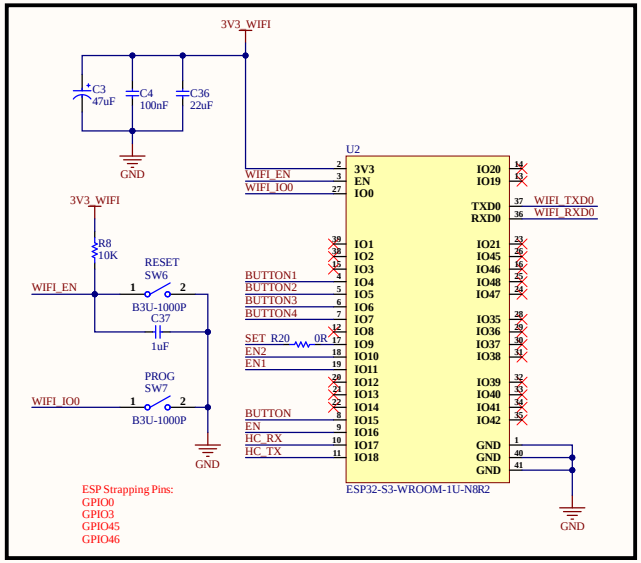


HC-12 433MHz MODULE

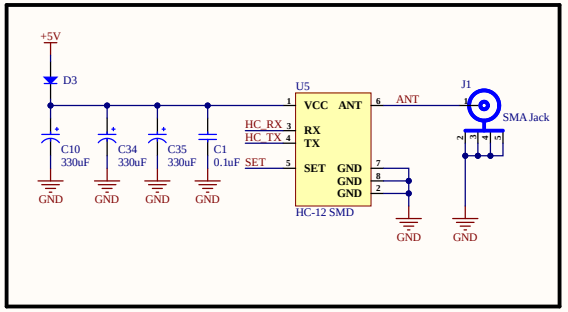

Helical Spring Antenna
HJ Tech RF2111027

USER INPUT

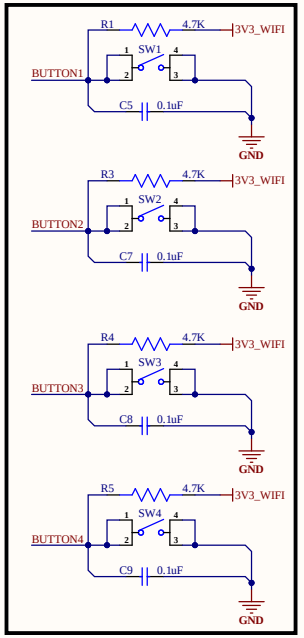

EN1 — EN1
EN2 — EN2
EN — EN
POWER — POWER

VBAT — VBAT
V — +5V
GND — GND

Cannot open file
D:\eSpark-Consultants\eSpark-Hardware\Altium Template\espark-consulting-group-800x300.jpg.
File does not exist.

Title:	Transmitter_Section.SchDoc
File:	Fob_Transmitter_V4.0.PrjPcb
Date: 11/19/2025	Page Num: 3
Drawn By: Huzaifa Ali	Page Total: 3

Layer	Name	Material	Thickness	Constant	Board Layer Stack
	Top Overlay				
	Top Solder	Solder Resist	3.00mil	3.5	
1	Top Layer		10.00mil		
	Dielectric 1	FR-4	37.00mil	4.8	
2	Bottom Layer		10.00mil		
	Bottom Solder	Solder Resist	3.00mil	3.5	
	Bottom Overlay				
Total board thickness:			63.00mil		

