Operating Warnings

Set up your system carefully. Follow these instructions very closely and pay close attention to the warnings and diagrams.

The S2 is fused at 5A. Always fit the correct 5A quick blow mains fuse. The S2 can control pumps up to 1000VA (1000W). DO NOT USE THE S2 WITH PUMPS GREATER THAN 1000VA.

Although the S2 and the Pump Mains Socket are supplied in waterproof enclosures, the mains plug IS NOT WATERPROOF. Do not plug the mains plug into a socket that could become wet during pumping as this will prove extremely hazardous.

CLOSE 230Vac PUMP MAINS SOCKET BEFORE TURNING ON S2 AND PUMP IF CONNECTION CAN GET SPLASHED OR WET IN USE.

KEEP 230Vac 5A MAINS PLUG DRY AND WELL AWAY FROM ANY WATER OR MOISTURE.

Specification	Value
Mains Supply Voltage	90 - 260 Vac
Pump Voltage	90 - 260 Vac
Fuse Rating	5A Quick Blow
Maximum Pump Power	1000VA
Enclosure Material	ABS
Water Resistance	IP65 (S2 box and socket)
Dimensions - S2	120 x 120 x 55(mm)
Working Temperature	0 to 40 Deg C

DISCLAIMER
THE MANUFACTURER RESERVES THE RIGHT TO MAKE CHANGES TO ANY PRODUCT HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. THE MANUFACTURER DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN.

Operator Controls

The controller is equipped with the following controls.


User Buttons

Start/Stop filling — FILL


Start or stop pump — PUMP


Display TDS1 value — TDS1

Display TDS2 value — TDS2

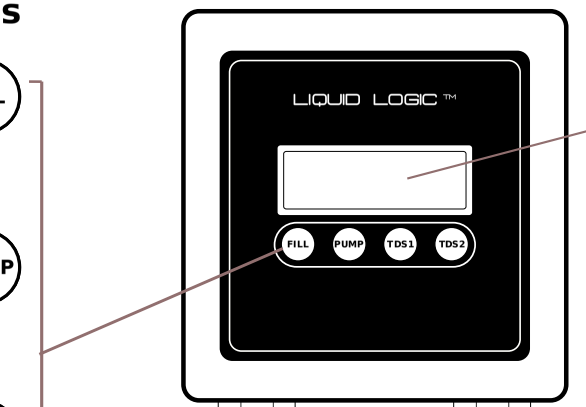

4 Digit display

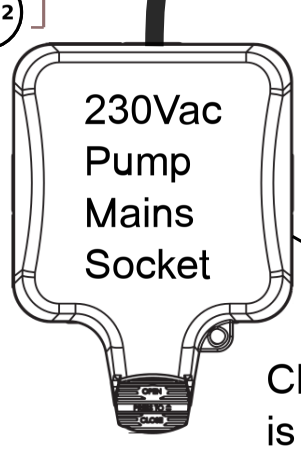



230Vac 5A Mains Plug

Close this cover if environment is wet or there is moisture

ALWAYS DISCONNECT THE MAINS SUPPLY BEFORE OPENING UNIT.

ALWAYS DISCONNECT THE MAINS SUPPLY BEFORE MAKING CONNECTIONS TO PUMP