



eSpark Consulting Group

Title: Top-Sheet.SchDoc	
File: IoT-Speaker-v2.1.PrjPcb	
Date: 3/10/2025	Page Num: 1
Drawn By: Huzaifa Ali	Page Total: 4


VUSB 5V INPUT

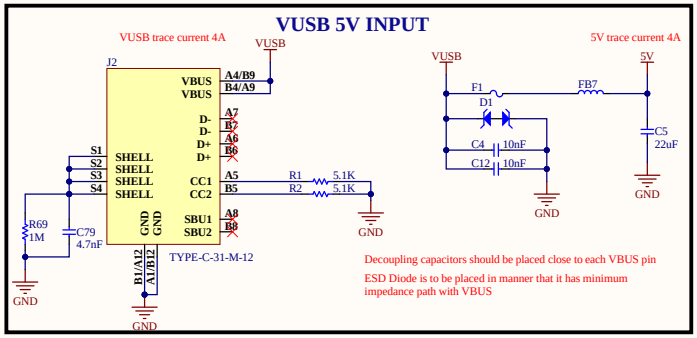


3V3 LDO

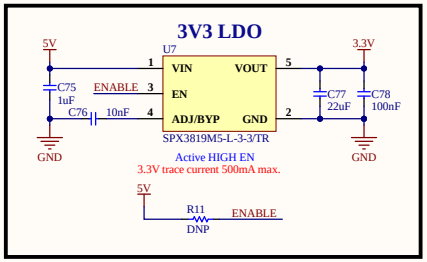


12V BOOST

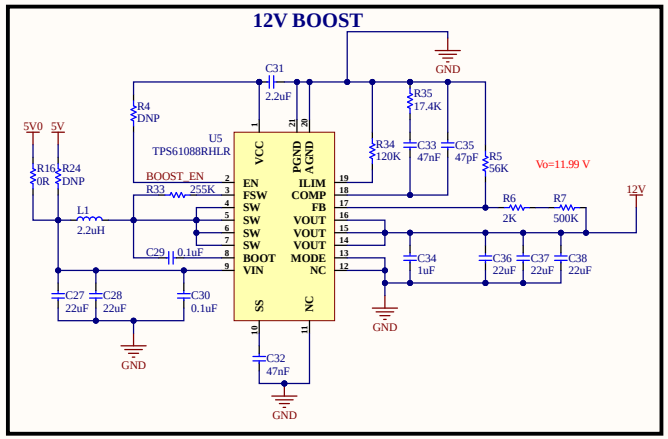


TEST POINTS



LATCH ON/OFF CONTROLLER

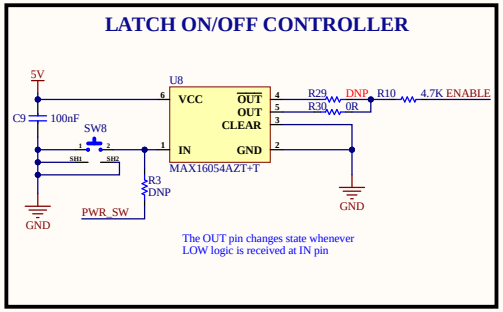

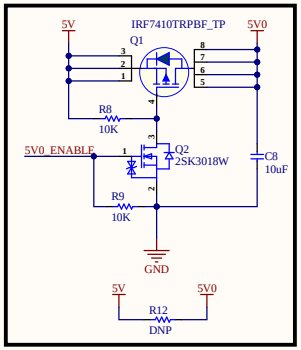


BOOST_EN
PWR_SW
5V0_ENABLE


12V
5V0
3.3V
GND


eSpark Consulting Group


Title: Power_Sheet.SchDoc	
File: IoT-Speaker-v2.1.PrjPcb	
Date: 3/13/2025	Page Num: 2
Drawn By: Huzaifa Ali	Page Total: 4


ESP32 CONTROLLER

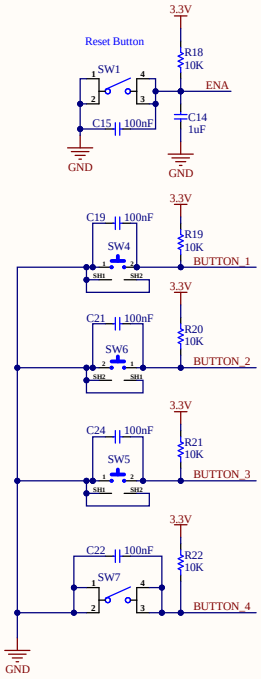


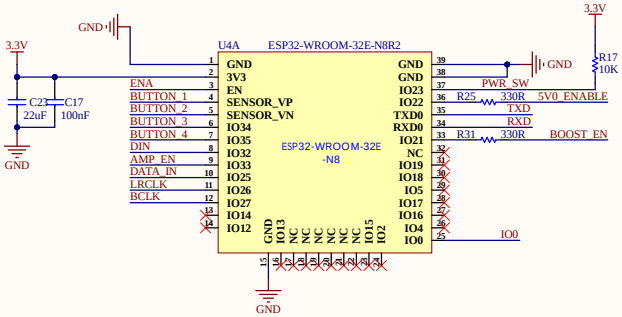








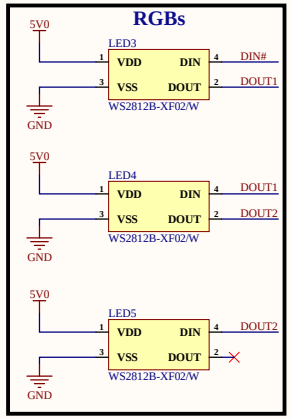


Strapping Pins
GPIO0
GPIO2
GPIO5
GPIO12
GPIO15
GPIO16 (PSRAM)

ESP32 should be routed such that the antenna is cutout properly and not subject to any traces / routes below it
All decoupling caps should be placed closest to their pins
All debouncing capacitors should be close to their buttons








eSpark Consulting Group

Title: Controller_Sheet.SchDoc	
File: IoT-Speaker-v2.1.PrjPcb	
Date: 3/10/2025	Page Num: 3
Drawn By: Huzaifa Ali	Page Total: 4

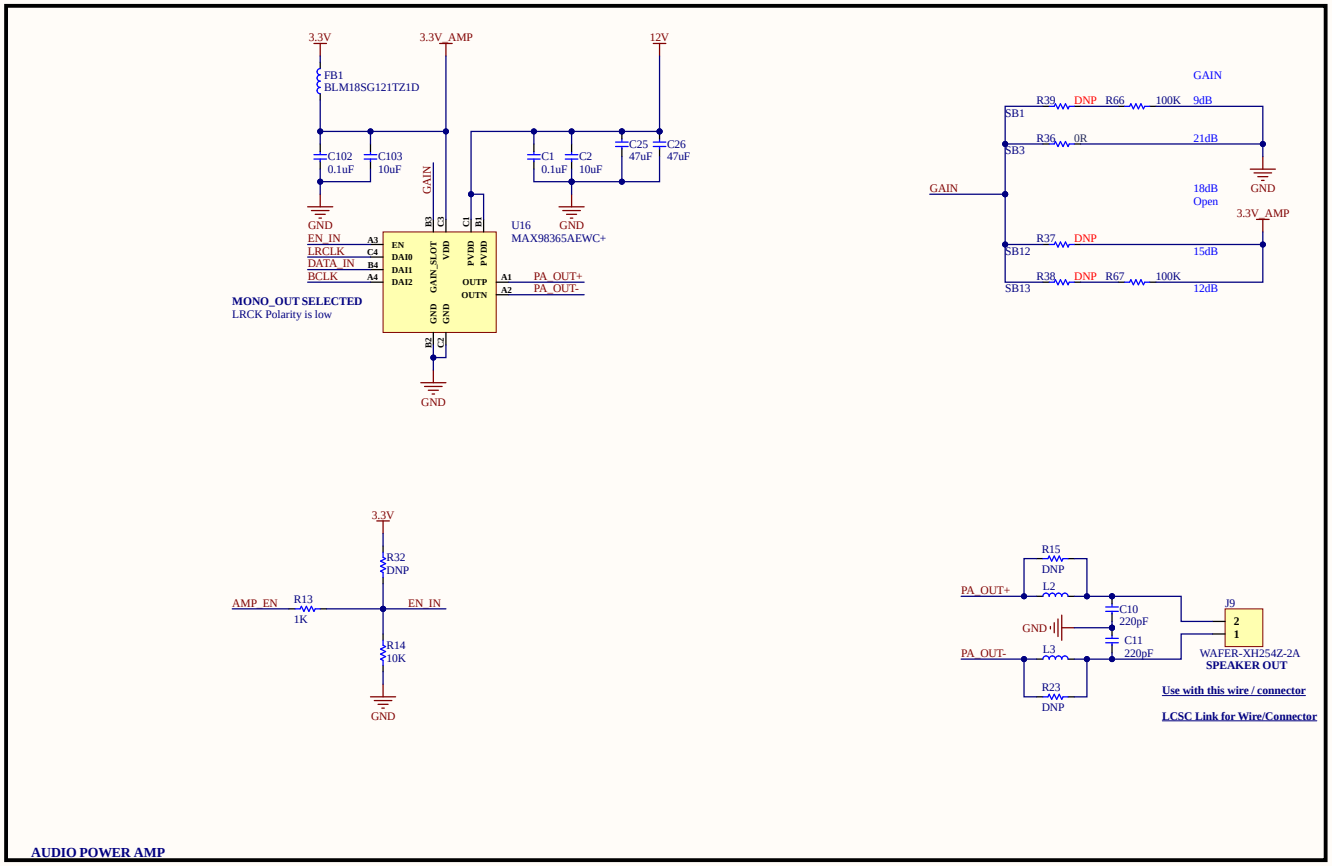

AMP_EN — AMP_EN

I2S_PORT: DATA_IN, LRCLK, BCLK — I2S_PORT

12V, 3.3V, 5V0, GND

Title:	Audio_Amplifier.SchDoc
File:	IoT-Speaker-v2.1.PrjPcb
Date: 3/13/2025	Page Num: 4
Drawn By: Huzaifa Ali	Page Total: 4

eSpark Consulting Group