



eSpark Consulting Group


Title: Top-Sheet.SchDoc	
File: IoT-Speaker-v2.0.PrjPcb	
Date: 3/10/2025	Page Num: 1
Drawn By: Huzaifa Ali	Page Total: 4

VUSB 5V CHARGE INPUT

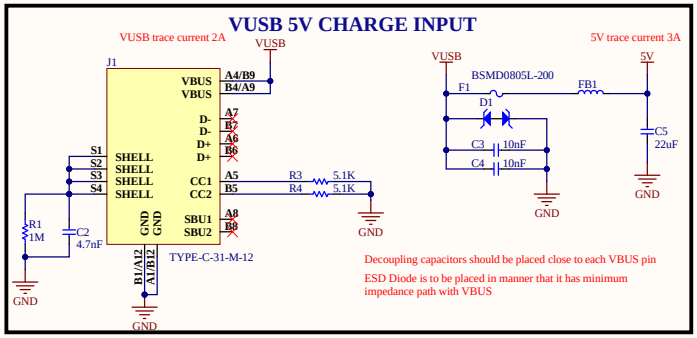


3V3 LDO

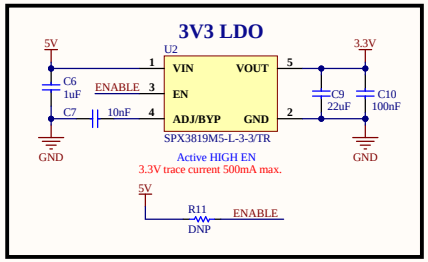






TEST POINTS

LATCH ON/OFF CONTROLLER

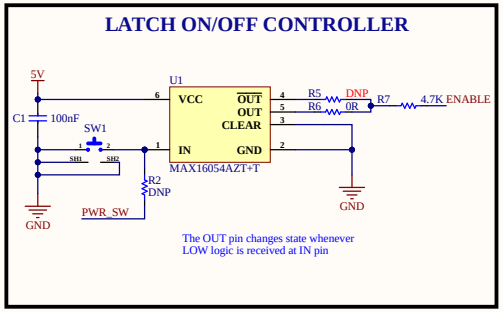

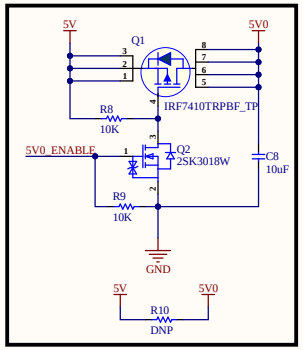







eSpark Consulting Group


Title: Power_Sheet.SchDoc	
File: IoT-Speaker-v2.0.PrjPcb	
Date: 5/8/2025	Page Num: 2
Drawn By: Huzaifa Ali	Page Total: 4


ESP32 CONTROLLER

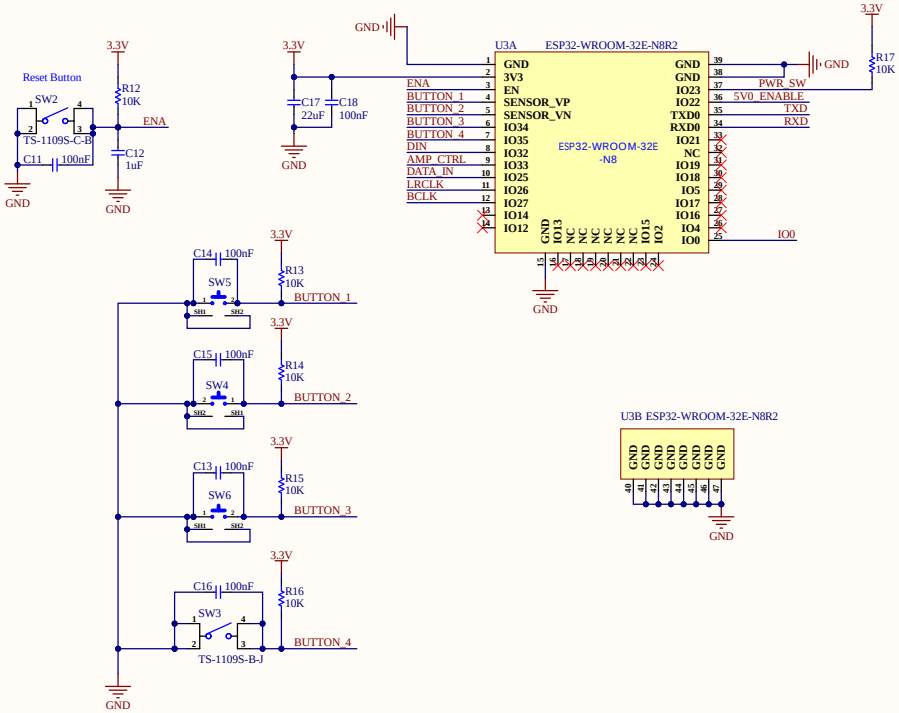







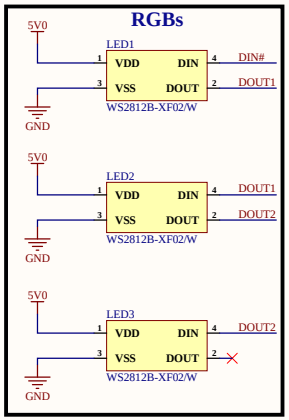

Strapping Pins
GPIO0
GPIO2
GPIO5
GPIO12
GPIO15
GPIO16 (PSRAM)

ESP32 should be routed such that the antenna is cutout properly and not subject to any traces / routes below it
All decoupling caps should be placed closest to their pins
All debouncing capacitors should be close to their buttons











eSpark Consulting Group

Title: Controller_Sheet.SchDoc	
File: IoT-Speaker-v2.0.PrjPcb	
Date: 5/8/2025	Page Num: 3
Drawn By: Huzaifa Ali	Page Total: 4

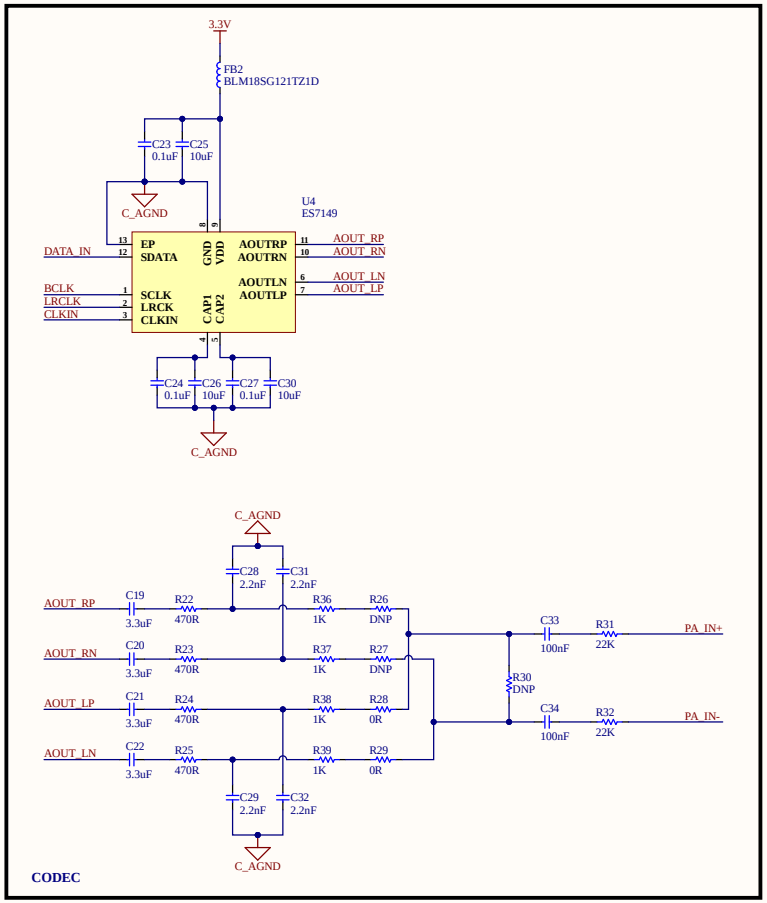

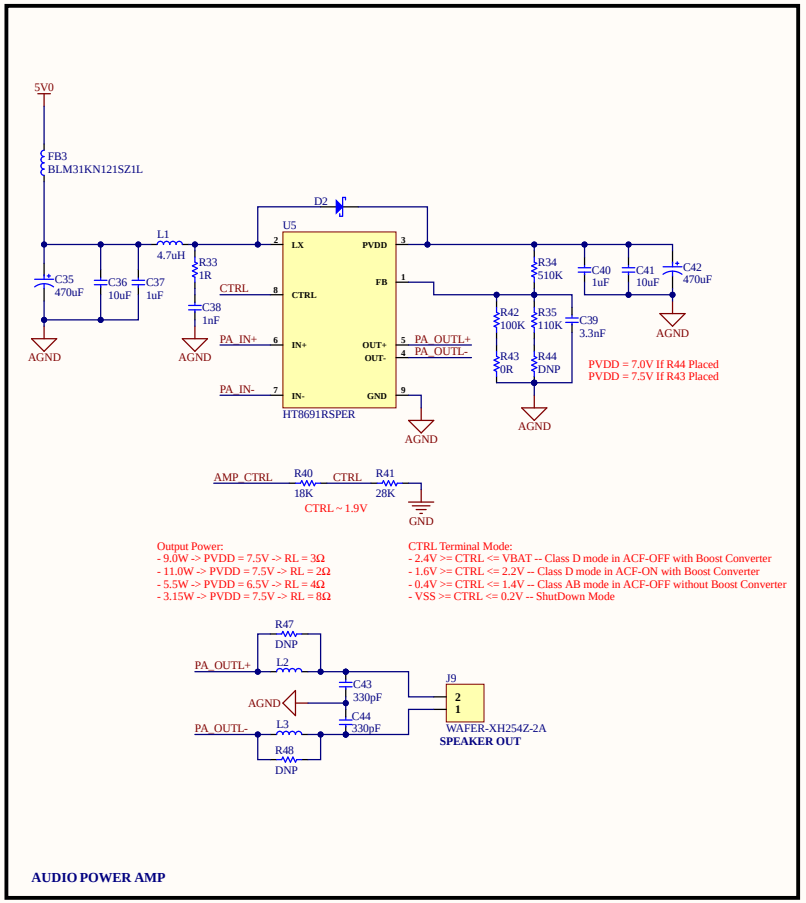





eSpark Consulting Group

Title: Audio_Amplifier.SchDoc	
File: IoT-Speaker-v2.0.PrjPcb	
Date: 5/8/2025	Page Num: 4
Drawn By: Huzaifa Ali	Page Total: 4