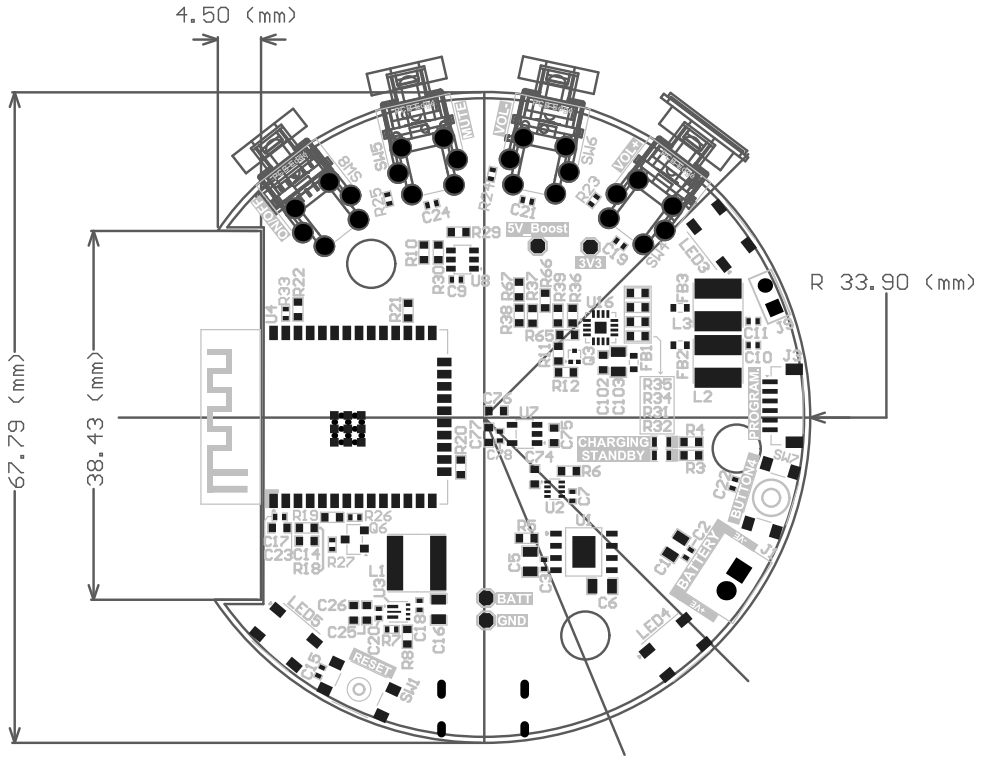

4.50 (mm)
67.79 (mm)
38.43 (mm)
R 33.90 (mm)
5V_Boost
3V3
CHARGING
STANDBY
BATT
GND
BATTERY
BUTTON
PROGRAM
RESET
LED3
LED4
LED5

Lay

1

2

Tot

Layer	Name	Material	Thickness	Constant	Board Layer Stack
	Top Overlay				
	Top Solder	Solder Resist	0.39mil	3.5	
1	Top Layer		1.38mil		
	Dielectric 1	FR-4	59.06mil	4.8	
2	Bottom Layer		1.38mil		
	Bottom Solder	Solder Resist	0.39mil	3.5	
	Bottom Overlay				

Total board thickness: 62.60mil

4.50 (mm)
67.79 (mm)
38.43 (mm)
R 33.90 (mm)
RoHS
compliant
ZERO CARBON FOOTPRINT

Lay
1
2

Tot

Layer	Name	Material	Thickness	Constant	Board Layer Stack
	Top Overlay				
	Top Solder	Solder Resist	0.39mil	3.5	
1	Top Layer		1.38mil		
	Dielectric 1	FR-4	59.06mil	4.8	
2	Bottom Layer		1.38mil		
	Bottom Solder	Solder Resist	0.39mil	3.5	
	Bottom Overlay				

Total board thickness: 62.60mil