Setup & Firmware Uploading Guide
Smart Button

Assembly Guide

1. **Prepare the Board for programming by connecting it to Voltlink programmer**
   Use the connection cable provided with the Voltlink adapter to connect with the Voltlink connector marked Serial Programming as shown in the image below

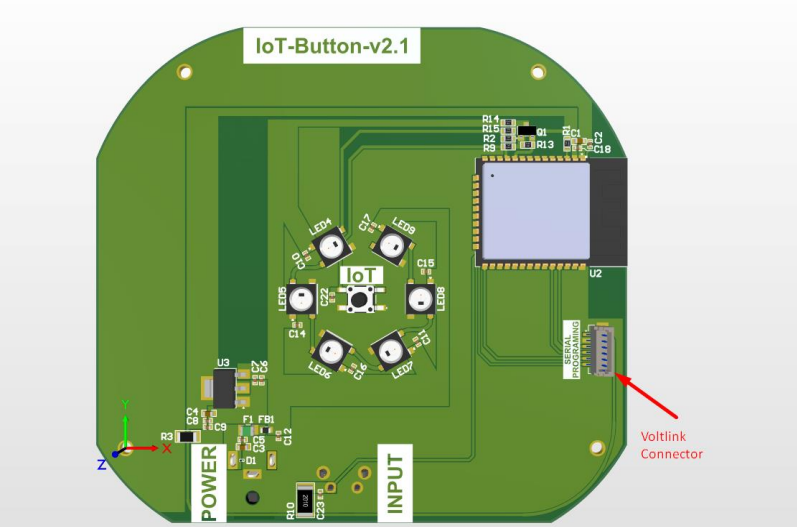


Figure: 1

Power up Sequence

Insert the Type-C cable into the Voltlink programmer. Next power the Smart speaker board by connecting it with the provided 5V adapter make sure the DC barrel jack connector lead is center positive (+Ve).