Setup & Firmware Uploading Guide
Smart Speaker

Assembly Guide

1. **Connect the Speaker connecting cable to the speaker**
   Carefully solder the Black wire to the Speaker terminal marked (-Ve). And Red wire to the speaker terminal marked (+Ve). As shown in figure: 3

   After soldering the wires, connect the speaker connector (as shown in Figure 2) to the speaker connector J9 on the PCB (as shown in Figure 1).

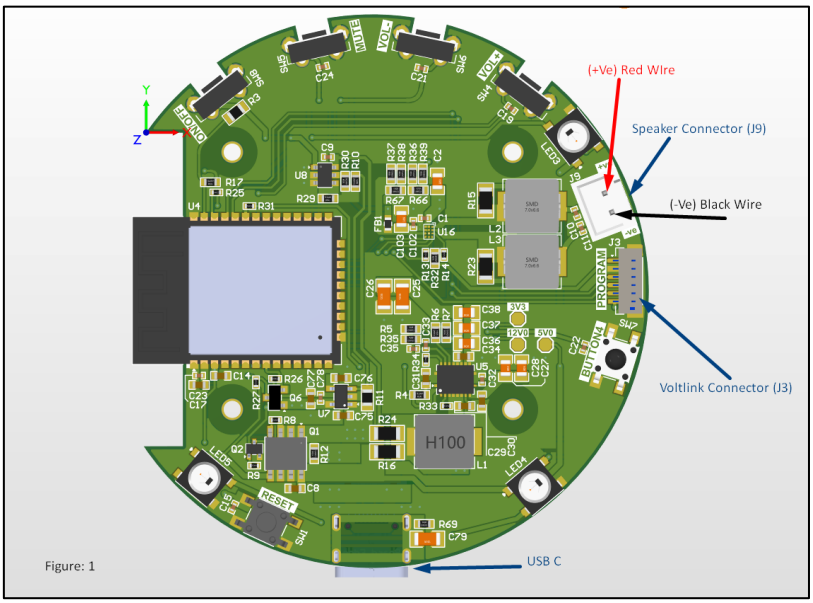


Figure: 1


Figure 2



Figure: 3

2. **Prepare the Board for programming by connecting it to Voltlink programmer as shown in Figure 4**

   Use the connection cable provided with the Voltlink adapter to connect with the Voltlink connector marked J3 in the Board

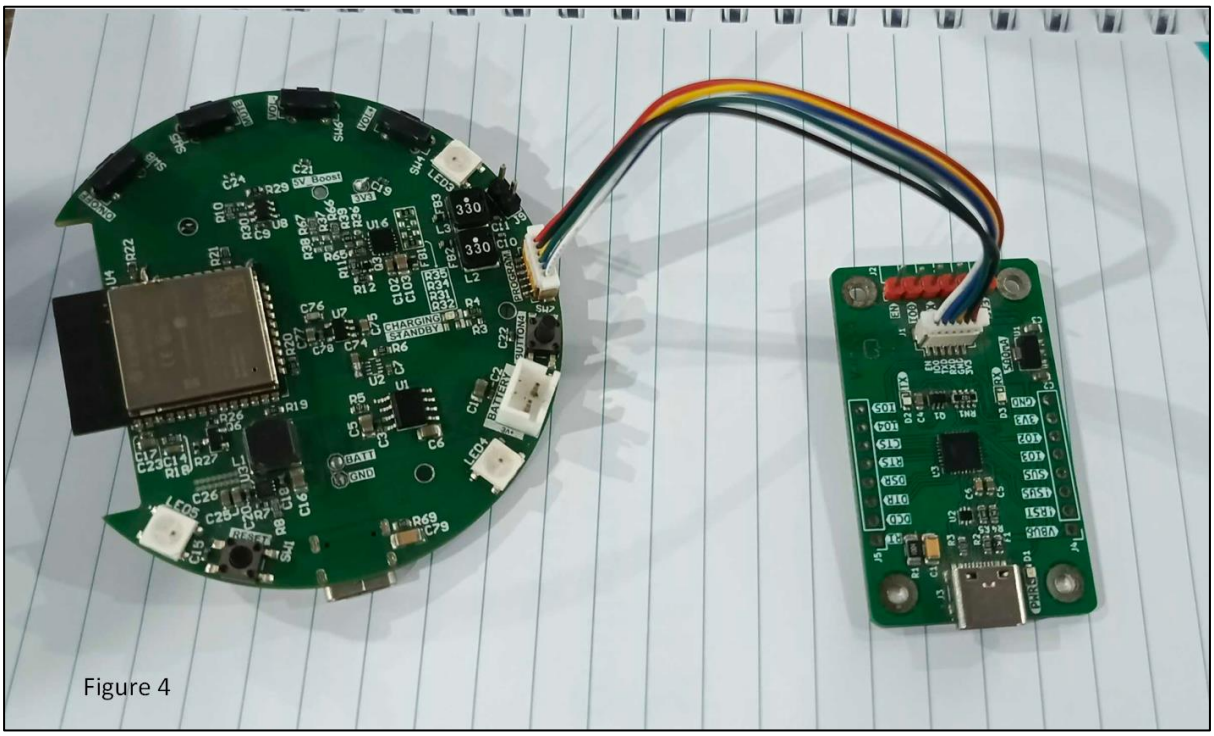


Figure 4

Power up Sequence

Insert the Type-C cable into the Voltlink programmer and Smart speaker board as shown in image below

