



POWER
DECOUPLING
DEBUG
CLOCKS
USB
MIC
PRE-AMP
SRAM
VOLTAGE REF
PMOD
BATTERY MONITOR
NOISE ISOLATION
Design Info: AN0046
- Place ferrite beads close to USB plug
- Place 15R close to CPU
- Route D+ and D- as 90R diff pair
Default resistor populated to use x16 SRAM mode.
x16 mode = R7 and R12 populated, R8, R13 are NC.
x8 mode = R8 and R13 populated, R7 and R12 are NC.
x16 mode = All pins used. Pin 45 acts as D15
x8 mode = Pin 45 acts as A20, UB, LB and I/O8 to I/O14 pins are not used.
Cannot open file D:\eSpark-Consultants\eSpark-Hardware\Altium Template\espark-consulting-group-800x300.jpg. File does not exist.
Title: Sheet1.SchDoc
File: AudioMoth-v1.2.0.PrjPcb
Date: 11/11/2024
Page Num: 1
Drawn By: Huzaifa Ali
Page Total: 2

IO EXPANDER

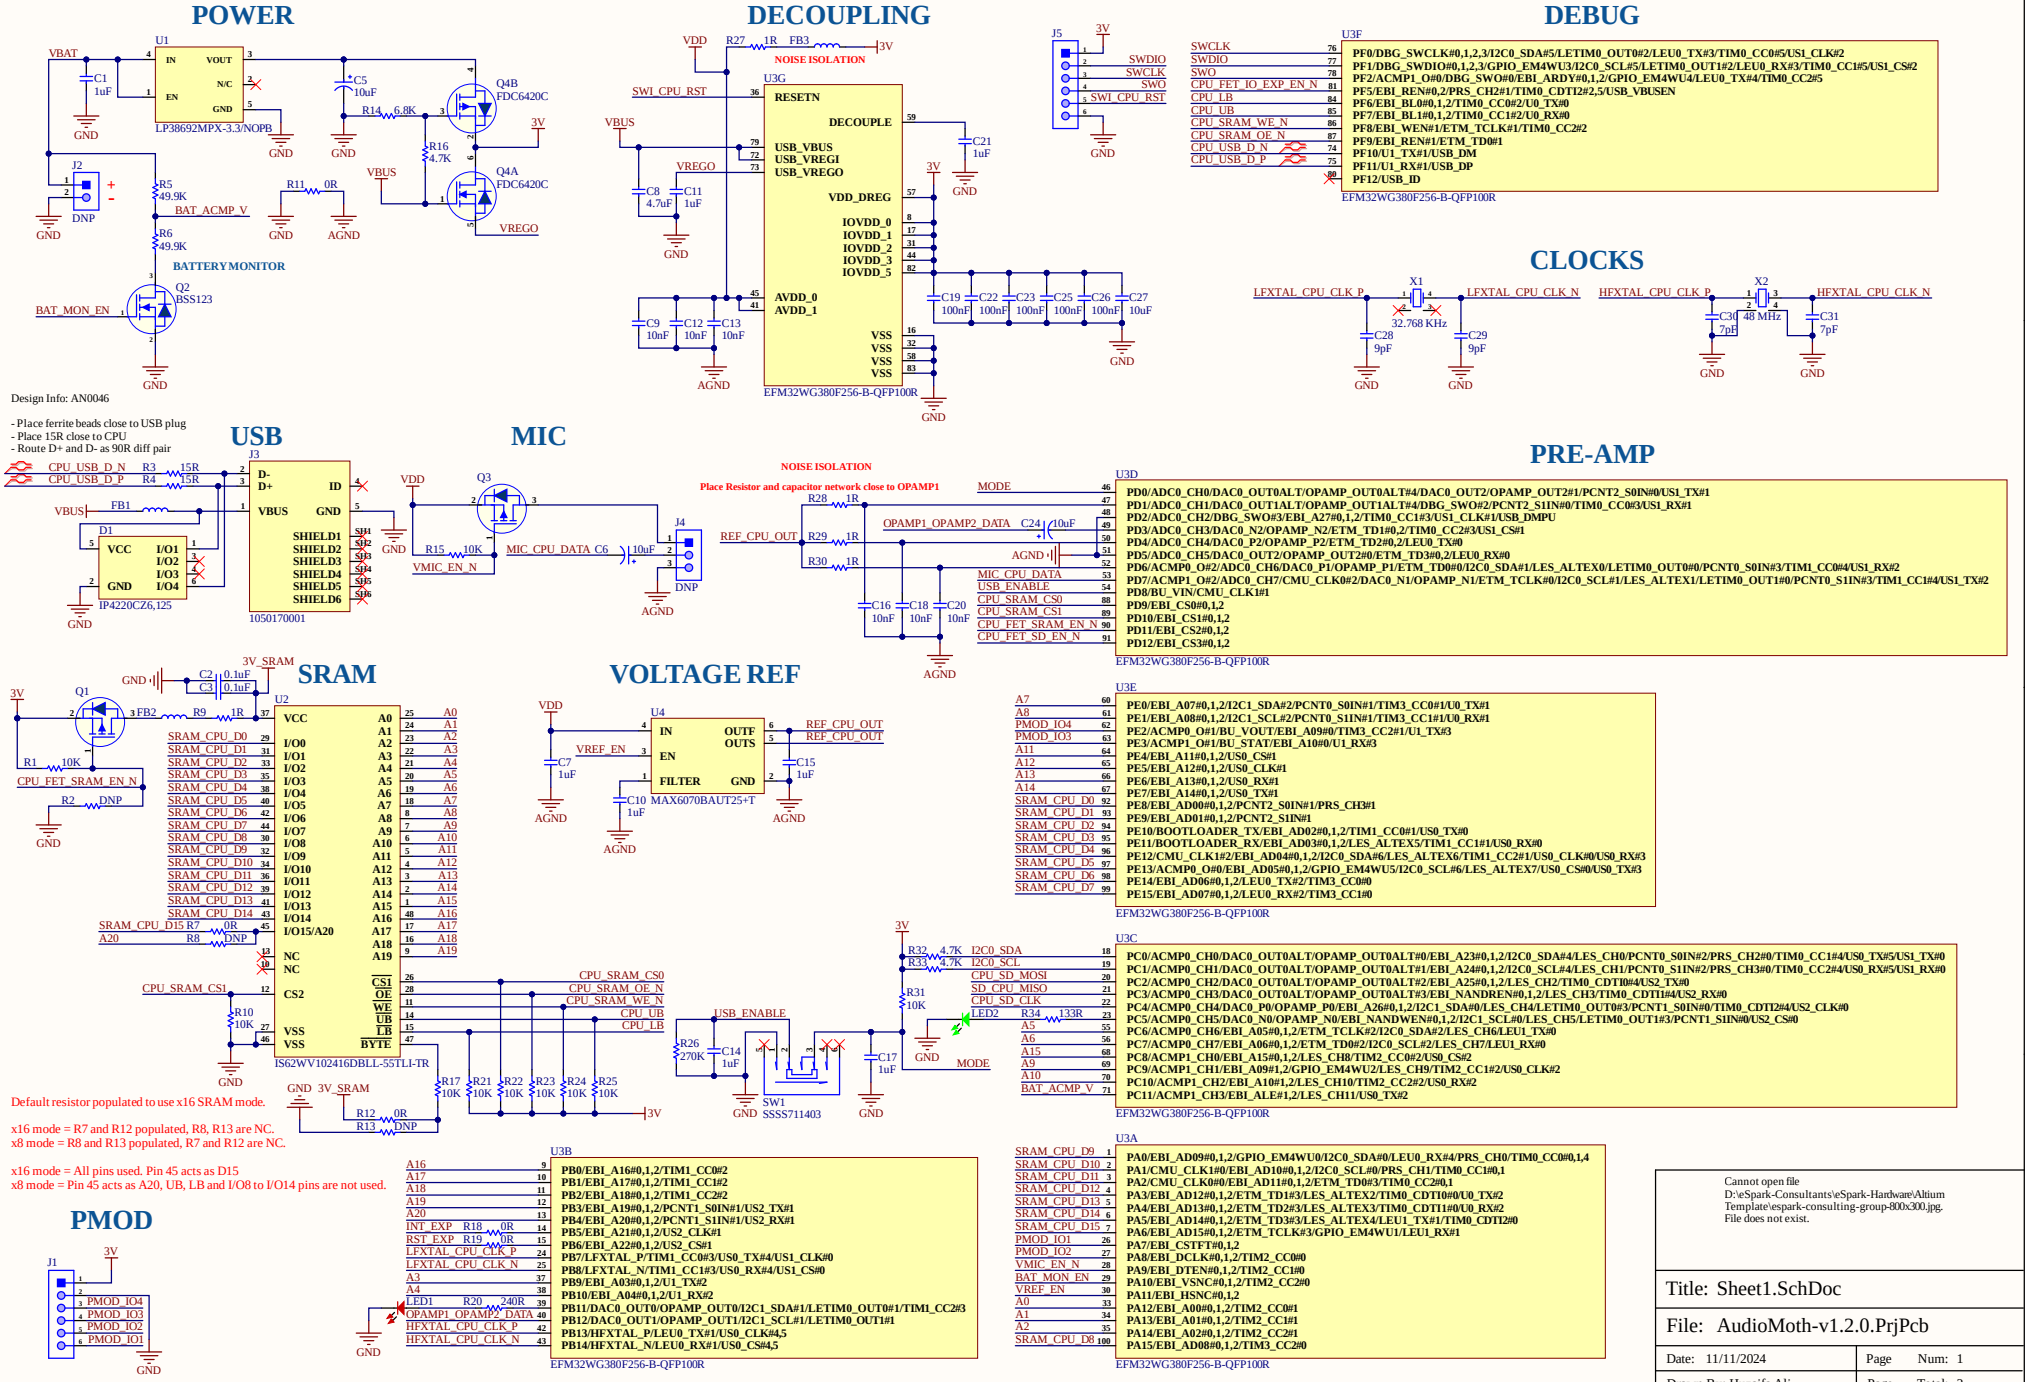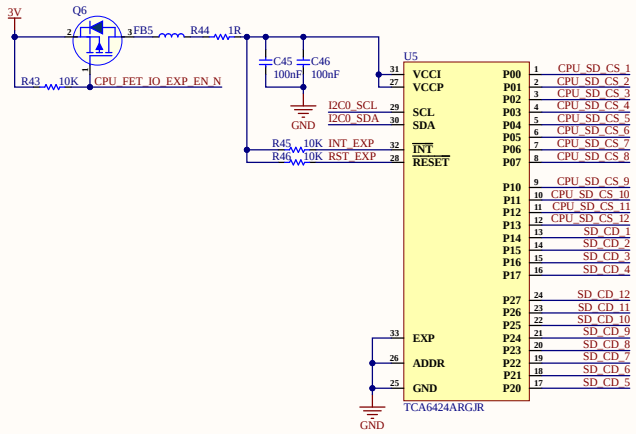


SD POWER SWITCH




SD CARDS


SD CARD# 1




SD CARD# 2




SD CARD# 3




SD CARD# 4




SD CARD# 5




SD CARD# 6




SD CARD# 7




SD CARD# 8




SD CARD# 9

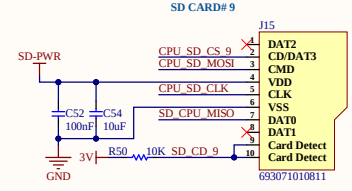


SD CARD# 10



SD CARD# 11




SD CARD# 12



Cannot open file D:\eSpark-Consultants\eSpark-Hardware\Altium Template\espark-consulting-group-800x300.jpg. File does not exist.

Title: Sheet2.SchDoc	
File: AudioMoth-v1.2.0.PrjPcb	
Date: 10/30/2024	Page Num: 2
Drawn By: Huzaifa Ali	Page Total: 2

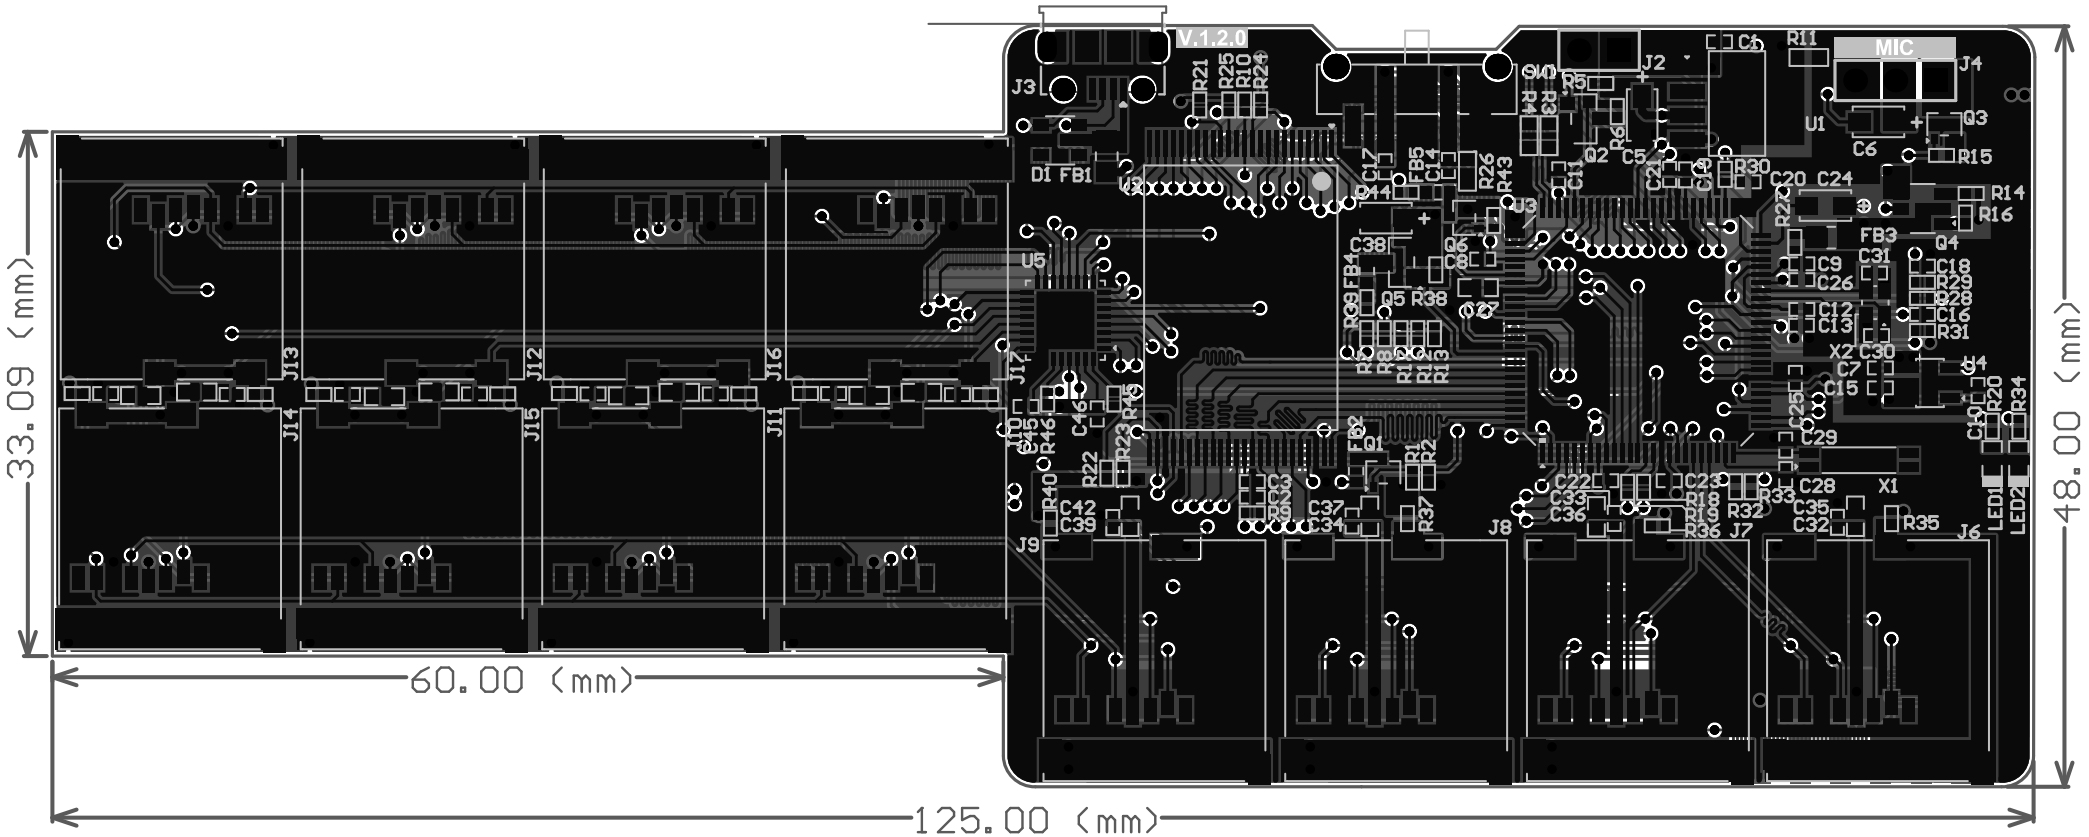
V.1.2.0
MIC
33.09 (mm)
48.00 (mm)
60.00 (mm)
125.00 (mm)