


See the changes I need made below. Also, see the project files attached for the Gerber and Eagle files for this project.




Don't use a battery holder. Instead leave 2 thru-holes (positive and negative) that will solder/ connect to a 6v external battery pack











Don't use a mic. Instead provide thru-holes to allow for soldering/connecting a 3 wire preamplified external microphone that runs on 3.3v power (wire 1 is 3.3v power, wire 2 is signal, and wire 3 is ground)





Make the preamp 0dB fixed gain, maybe it is already?





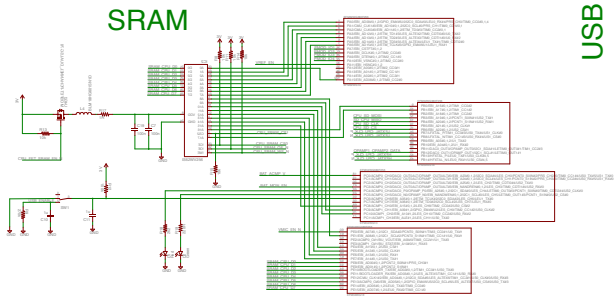







Change to use (10) microSD cards instead of (1). Unit should fill up 1 card and then move to the next as it fills each card up.

Let's start with using the same or similar EFM32 MCU. But later I will need to switch to a STM32 version once we get this EFM32 version working first.

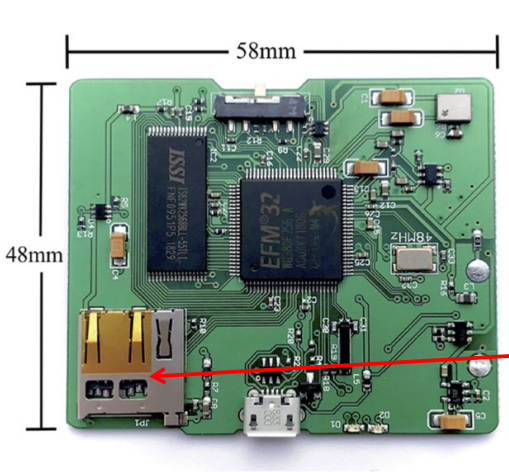

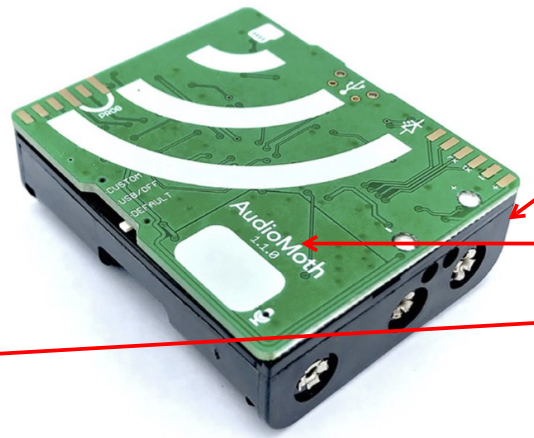

REMOVE BATTERY HOLDER. INSTEAD LEAVE THRU-HOLES TO SOLDER ON A EXTERNAL BATTERY PACK WIRE LEADS

REMOVE SILKSCREEN LOGO SHOWN ON THE BACKSIDE. INSTEAD JUST SAY "1.0.0"

EXTEND BOARD LONGER AS REQUIRED TO FIT ALL THE SD CARD SLOTS
(Place card holders on both sides of board)