



POWER
DECOUPLING
DEBUG
CLOCKS
USB
MIC
PRE-AMP
SRAM
VOLTAGE REF
PMOD
BATTERYMONITOR
NOISE ISOLATION
Design Info: AN0046
- Place ferrite beads close to USB plug
- Place 15R close to CPU
- Route D+ and D- as 90R diff pair
Default resistor populated to use x16 SRAM mode.
x16 mode = R7 and R12 populated, R8, R13 are NC.
x8 mode = R8 and R13 populated, R7 and R12 are NC.
x16 mode = All pins used. Pin 45 acts as D15
x8 mode = Pin 45 acts as A20, UB, LB and I/O8 to I/O14 pins are not used.
Place Resistor and capacitor network close to OPAMP1
PB0/EBI_A16#0,1,2/TIM1_CC0#2
PB1/EBI_A17#0,1,2/TIM1_CC1#2
PB2/EBI_A18#0,1,2/TIM1_CC2#2
PB3/EBI_A19#0,1,2/PCNT1_S0IN#1/US2_TX#1
PB4/EBI_A20#0,1,2/PCNT1_S1IN#1/US2_RX#1
PB5/EBI_A21#0,1,2/US2_CLK#1
PB6/EBI_A22#0,1,2/US2_CS#1
PB7/LFXTAL_P/TIM1_CC0#3/US0_TX#4/US1_CLK#0
PB8/LFXTAL_N/TIM1_CC1#3/US0_RX#4/US1_CS#0
PB9/EBI_A03#0,1,2/U1_TX#2
PB10/EBI_A04#0,1,2/U1_RX#2
PB11/DAC0_OUT0/OPAMP_OUT0/I2C1_SDA#1/LETIM0_OUT0#1/TIM1_CC2#3
PB12/DAC0_OUT1/OPAMP_OUT1/I2C1_SCL#1/LETIM0_OUT1#1
PB13/HFXTAL_P/LEU0_TX#1/US0_CLK#4,5
PB14/HFXTAL_N/LEU0_RX#1/US0_CS#4,5
EFM32WG380F256-B-QFP100R
eSpark Consulting Group
Title: Sheet1.SchDoc
File: AudioMoth-v1.3.0.PrjPcb
Date: 25-Jun-25
Page Num: 1
Drawn By: Huzaifa Ali
Page Total: 2


IO EXPANDER 1

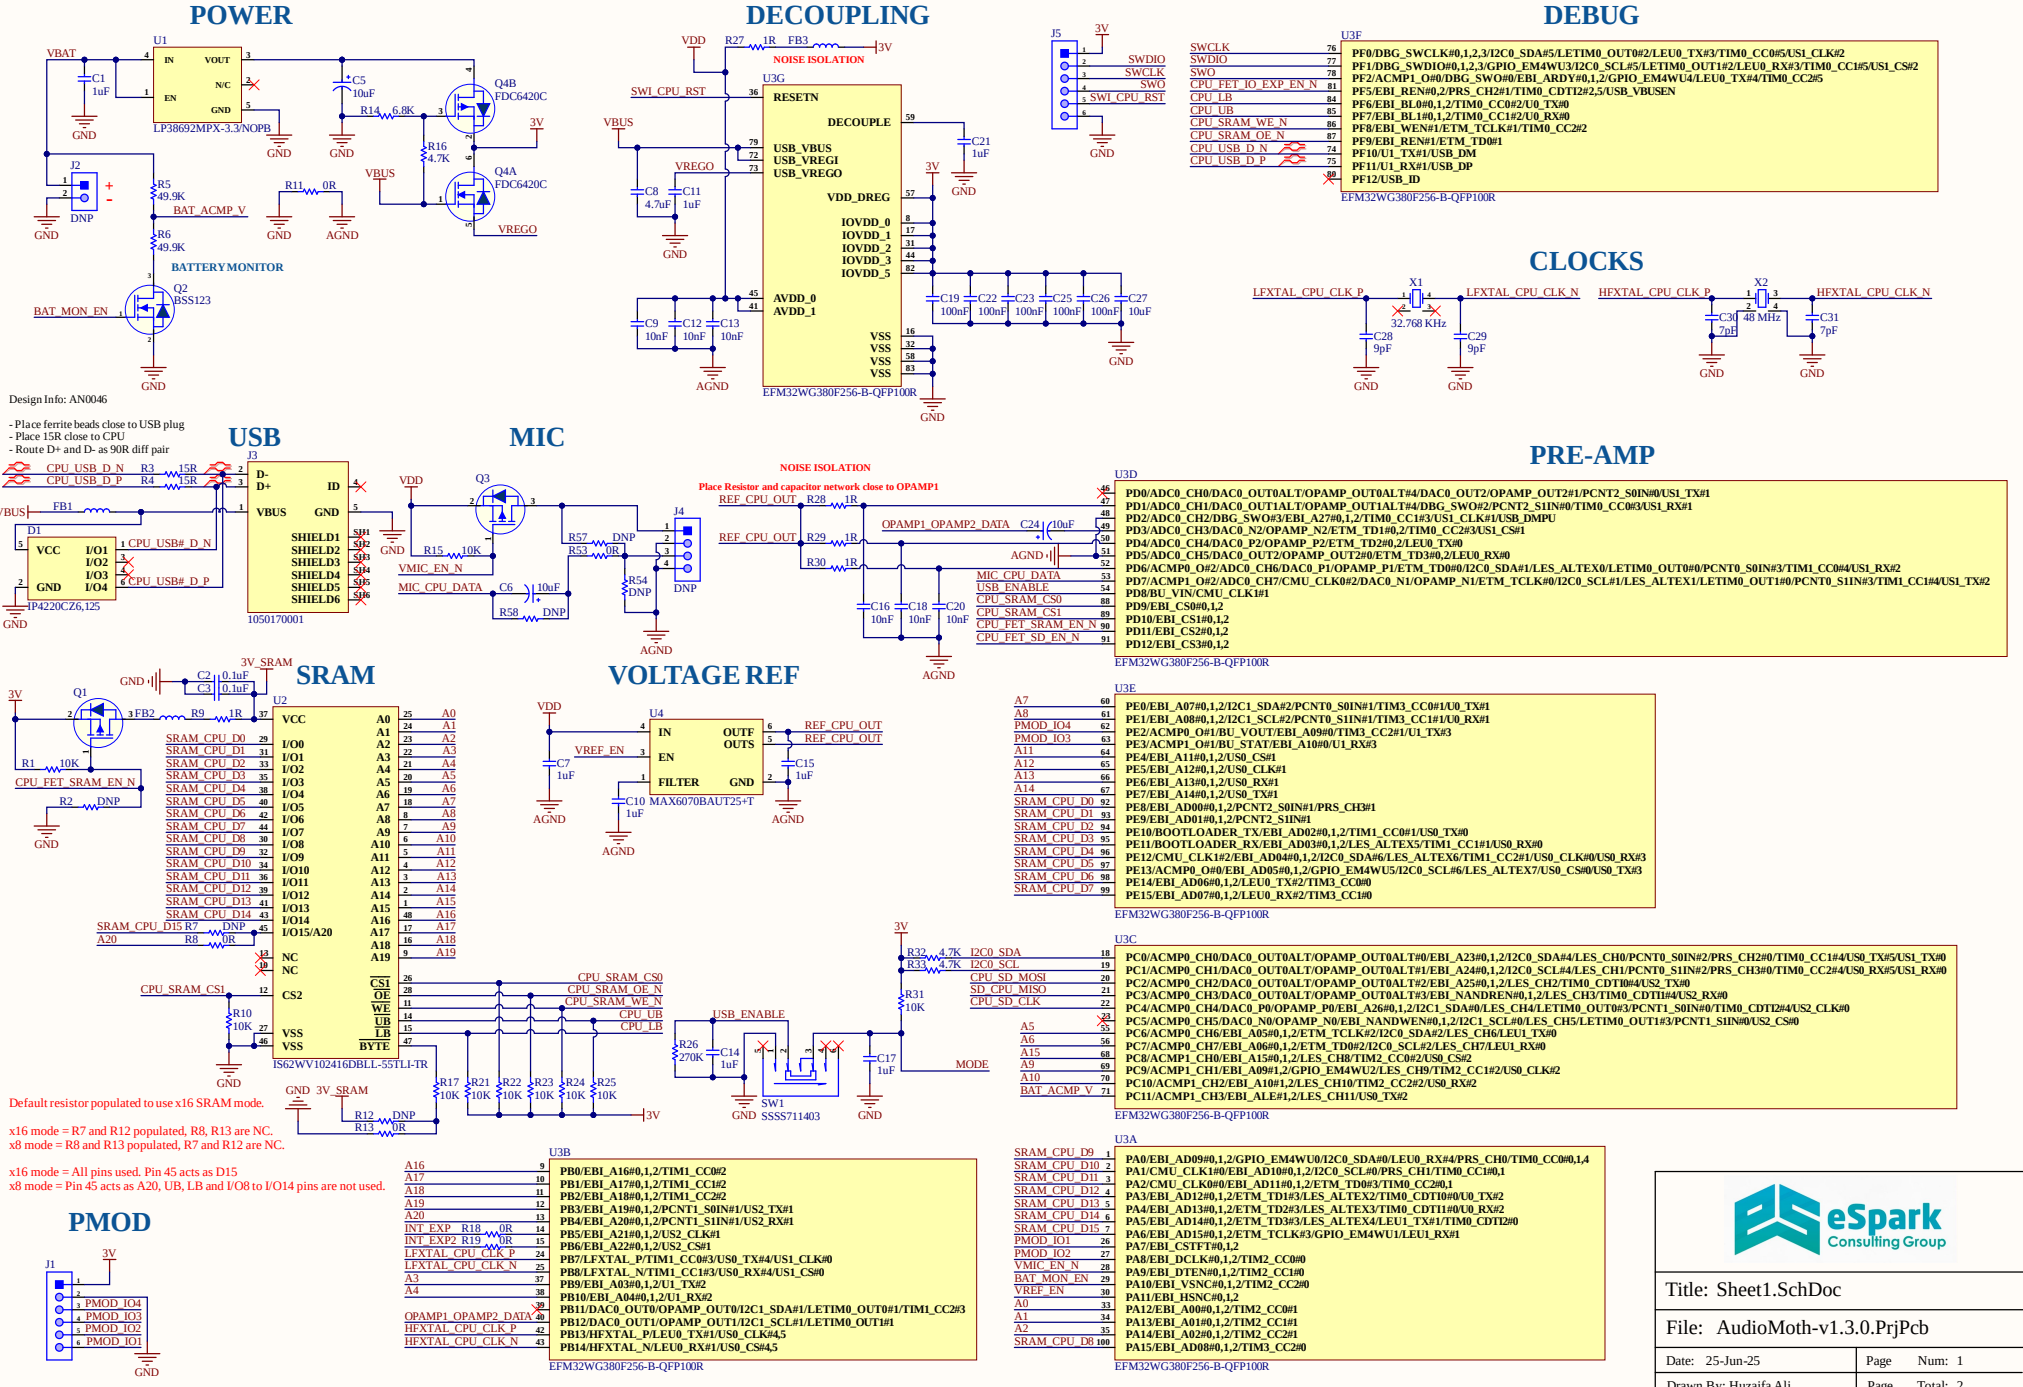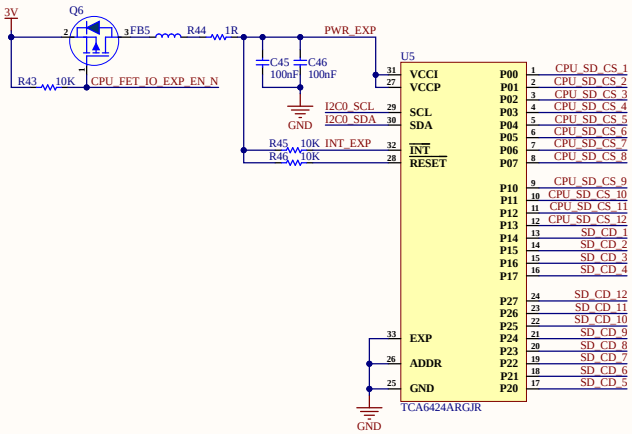

IO EXPANDER 2

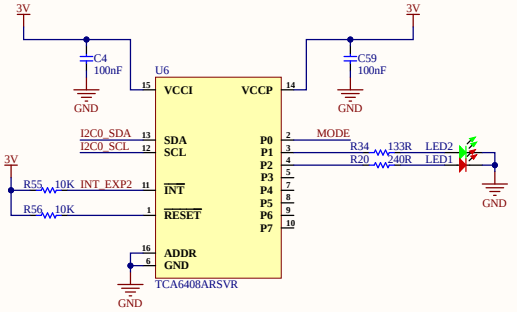


SD POWER SWITCH




SD CARDS


SD CARD# 1




SD CARD# 2




SD CARD# 3




SD CARD# 4




SD CARD# 5




SD CARD# 6




SD CARD# 7




SD CARD# 8




SD CARD# 9

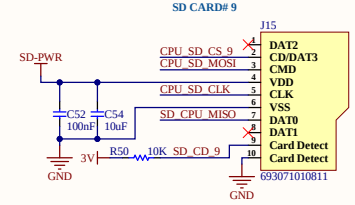


SD CARD# 10



SD CARD# 11



SD CARD# 12



eSpark Consulting Group

Title: Sheet2.SchDoc	
File: AudioMoth-v1.3.0.PrjPcb	
Date: 25-Jun-25	Page Num: 2
Drawn By: Huzaifa Ali	Page Total: 2