

INPUT USB CONNECTOR

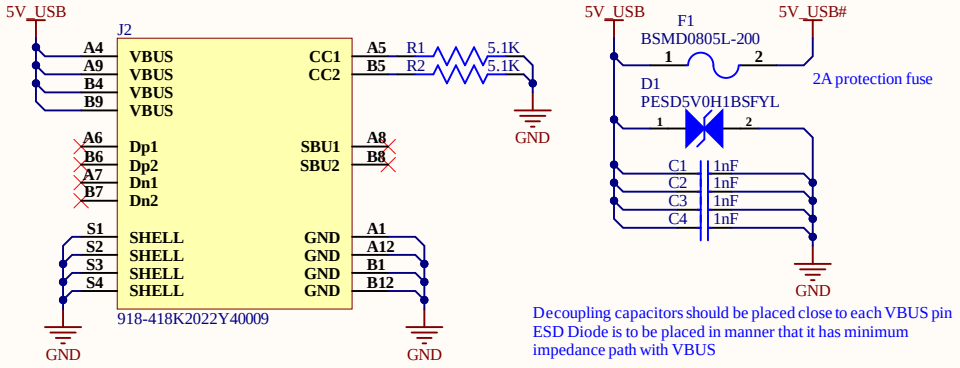

J2 is used for charging input


Decoupling capacitors should be placed close to each VBUS pin
ESD Diode is to be placed in manner that it has minimum impedance path with VBUS

INTERFACE CONNECTOR



J1 is used to connect side PCB with Main PCB


USER BUTTONS



This button is used to wake up ESP32 from deep sleep mode

Cannot open file
D:\eSpark-Consultants\eSpark-Hardware\Altium Template\espark-consulting-group-800x300.jpg.
File does not exist.

Title: Charge-schematic.SchDoc	
File: Side-PCB-v1.1.PrjPcb	
Date: 7/14/2023	Page Num: 1
Drawn By: Huzaifa Ali	Page Total: 1

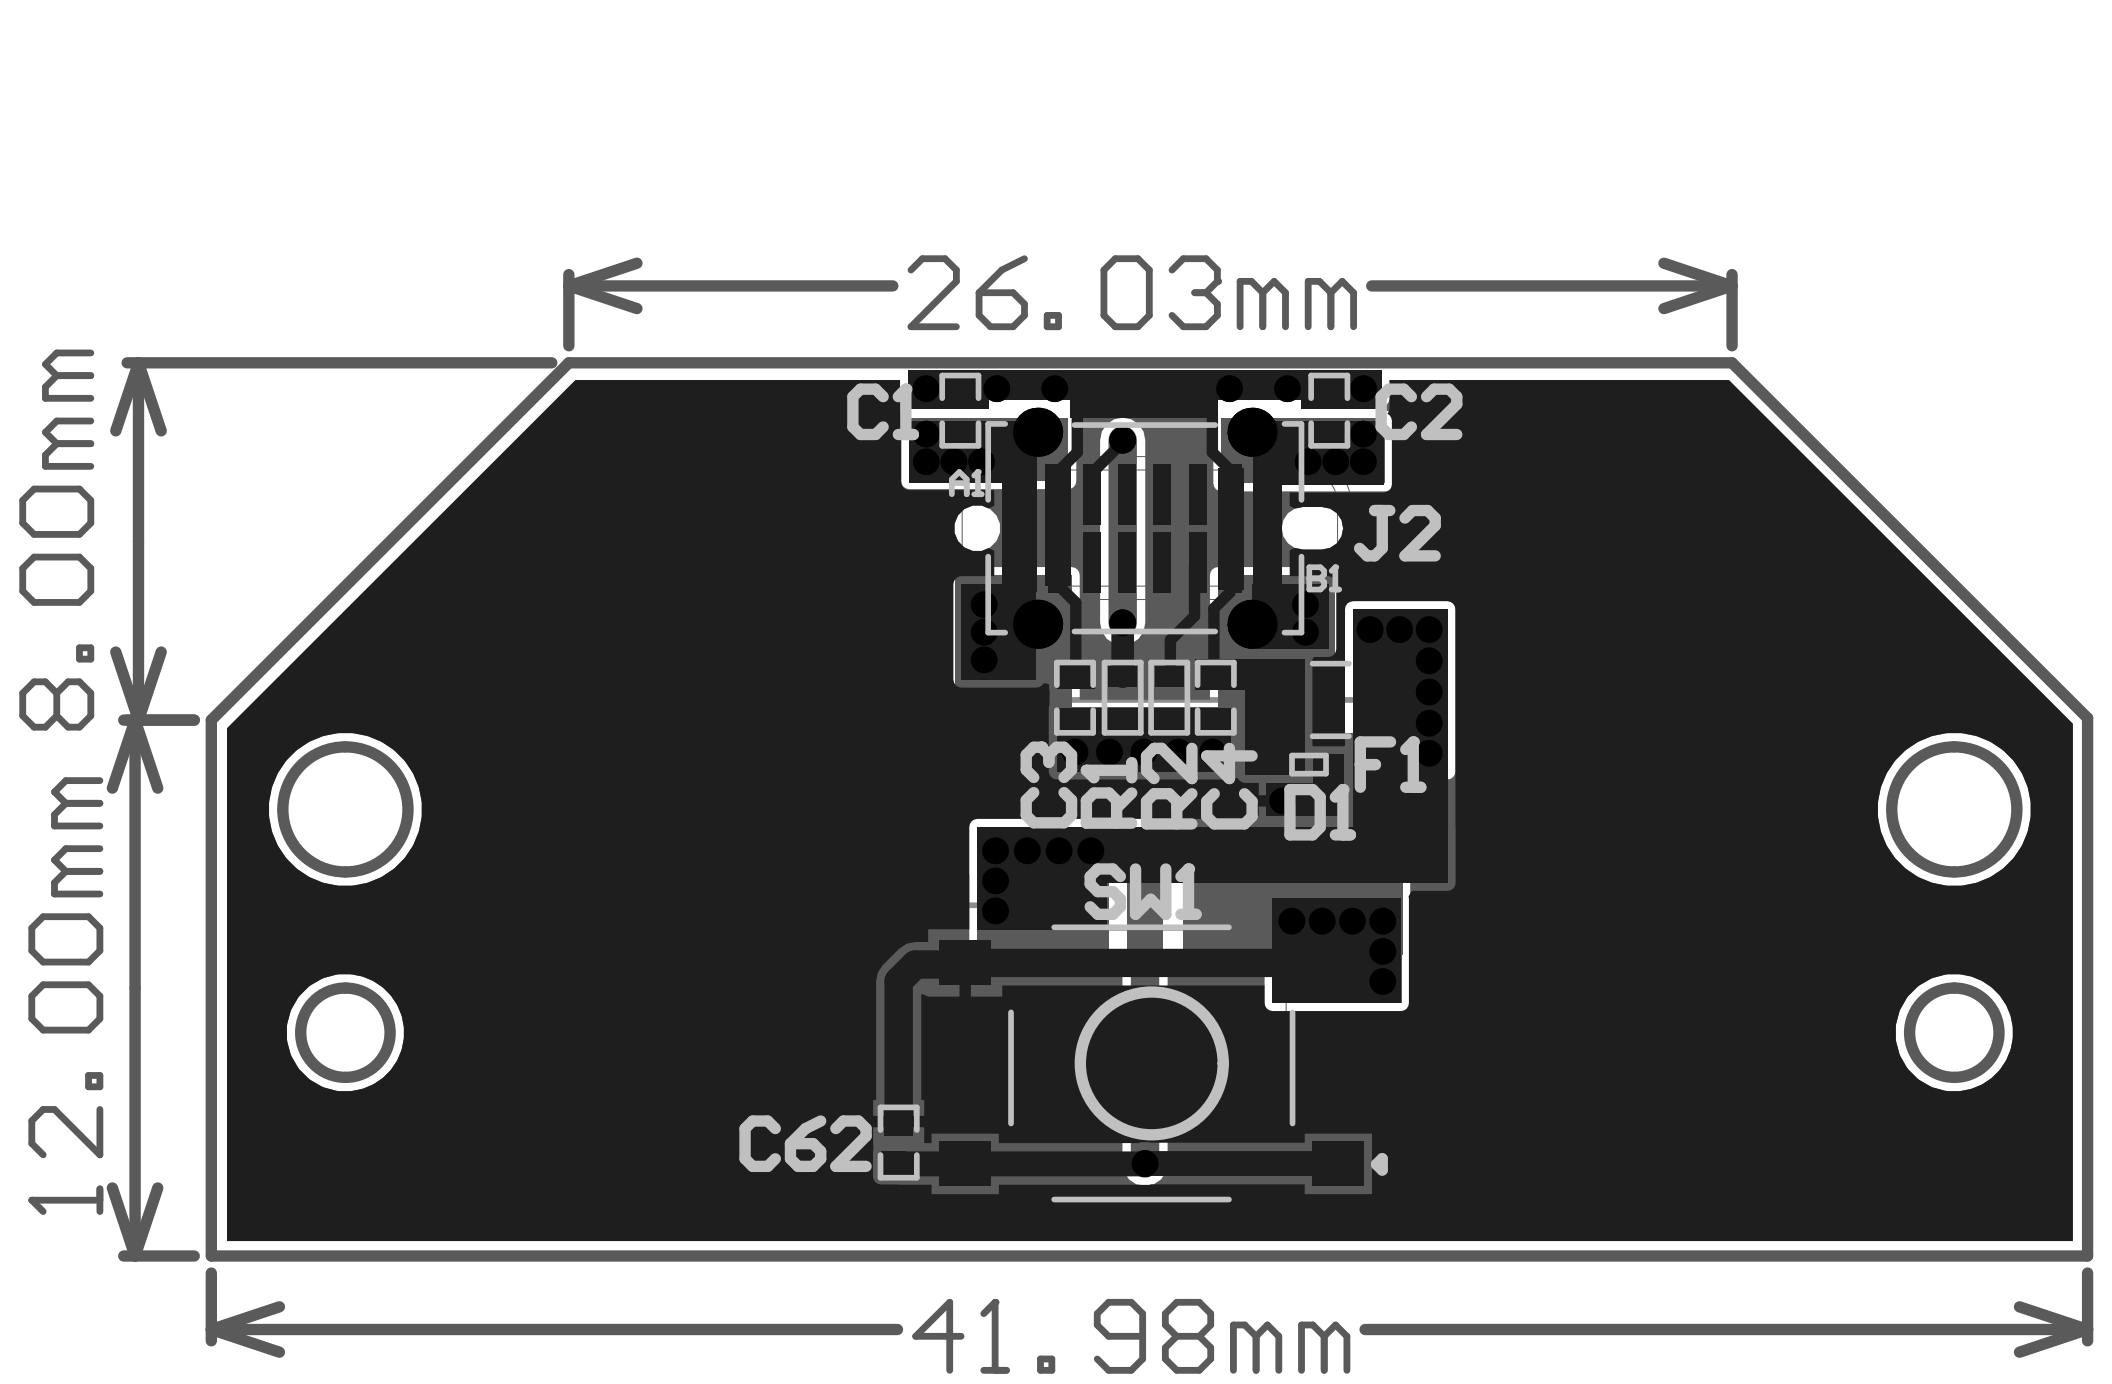
26.03mm
8.00mm
12.00mm
41.98mm
C1
C2
A1
B1
J2
F1
D1
SW1
C62